



# PROBLEM SUMMARY

Sample Rating Trend

DEGRADATION



Machine Id  
**933050**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**



## COMPONENT CONDITION SUMMARY

No relevant graphs to display

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>▲ 3.1</b>	---	---

Customer Id: GFL152  
Sample No.: GFL0082090  
Lab Number: 05899657  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.


## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

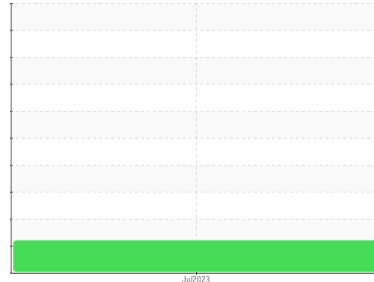

Machine Id  
**933050**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0082090</b>	---	---
Sample Date	Client Info	<b>12 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>564</b>	---
Oil Age	hrs	Client Info	<b>564</b>	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	---
Glycol	WC Method		<b>NEG</b>	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>120	<b>57</b>	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	---
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>20	<b>17</b>	---
Lead	ppm	ASTM D5185m	>40	<b>2</b>	---
Copper	ppm	ASTM D5185m	>330	<b>19</b>	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>14</b>	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---
Molybdenum	ppm	ASTM D5185m	60	<b>54</b>	---
Manganese	ppm	ASTM D5185m	0	<b>17</b>	---
Magnesium	ppm	ASTM D5185m	1010	<b>729</b>	---
Calcium	ppm	ASTM D5185m	1070	<b>1010</b>	---
Phosphorus	ppm	ASTM D5185m	1150	<b>687</b>	---
Zinc	ppm	ASTM D5185m	1270	<b>903</b>	---
Sulfur	ppm	ASTM D5185m	2060	<b>2325</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>40</b>	---
Sodium	ppm	ASTM D5185m		<b>2</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>42</b>	---

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>4	<b>0</b>	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.5</b>	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.0</b>	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.2</b>	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>▲ 3.1</b>	---







# OIL ANALYSIS REPORT

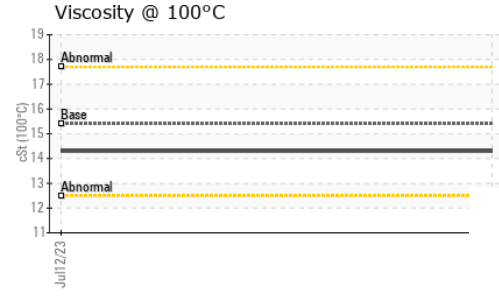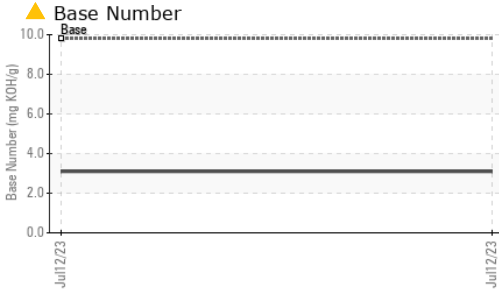

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.3</b>	---	---

## GRAPHS

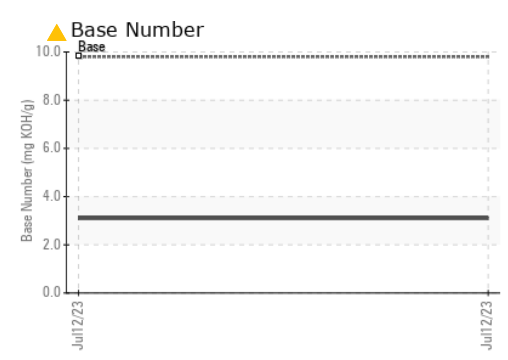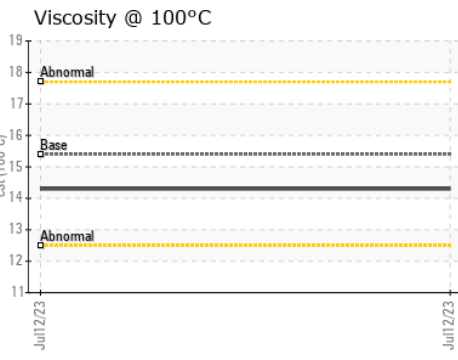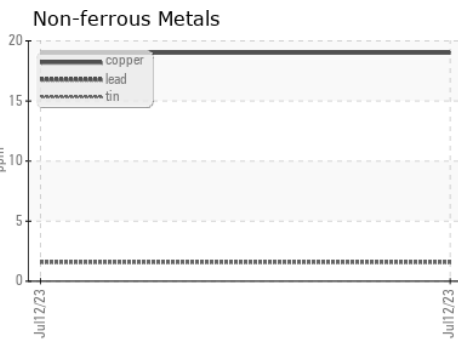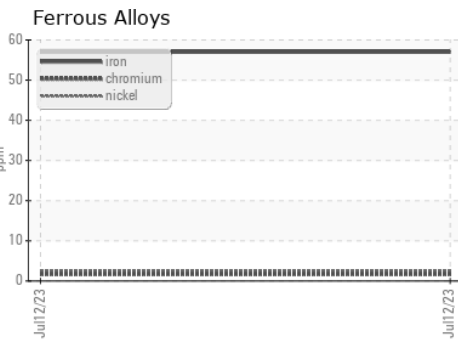

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0082090 **Received** : 17 Jul 2023  
**Lab Number** : **05899657** **Diagnosed** : 19 Jul 2023  
**Unique Number** : 10561013 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 152 - Jacksonville**  
 7580 PHILIPS HWY  
 Jacksonville, FL  
 US 32256  
 Contact: Robert Clark

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: