

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
NORTH SIDE SHIPPING BRIDGE

Component
Gearbox

Fluid
SCHAEFFER MOLY FULL SYN GEAR OIL (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0100298	---	---
Sample Date	Client Info	16 Jul 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>200	158	---	---
Chromium ppm ASTM D5185m	>15	1	---	---
Nickel ppm ASTM D5185m	>15	<1	---	---
Titanium ppm ASTM D5185m		<1	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>25	3	---	---
Lead ppm ASTM D5185m	>100	0	---	---
Copper ppm ASTM D5185m	>200	2	---	---
Tin ppm ASTM D5185m	>25	0	---	---
Vanadium ppm ASTM D5185m		<1	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		60	---	---
Barium ppm ASTM D5185m		0	---	---
Molybdenum ppm ASTM D5185m		477	---	---
Manganese ppm ASTM D5185m		2	---	---
Magnesium ppm ASTM D5185m		3	---	---
Calcium ppm ASTM D5185m		44	---	---
Phosphorus ppm ASTM D5185m		1180	---	---
Zinc ppm ASTM D5185m		36	---	---
Sulfur ppm ASTM D5185m		25056	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>50	31	---	---
Sodium ppm ASTM D5185m		5	---	---
Potassium ppm ASTM D5185m	>20	<1	---	---

FLUID DEGRADATION



method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		2.39	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal scalar *Visual	NONE	LIGHT	---	---
Yellow Metal scalar *Visual	NONE	NONE	---	---
Precipitate scalar *Visual	NONE	NONE	---	---
Silt scalar *Visual	NONE	NONE	---	---
Debris scalar *Visual	NONE	NONE	---	---
Sand/Dirt scalar *Visual	NONE	NONE	---	---
Appearance scalar *Visual	NORML	NORML	---	---
Odor scalar *Visual	NORML	NORML	---	---
Emulsified Water scalar *Visual	>0.2	NEG	---	---
Free Water scalar *Visual		NEG	---	---







OIL ANALYSIS REPORT

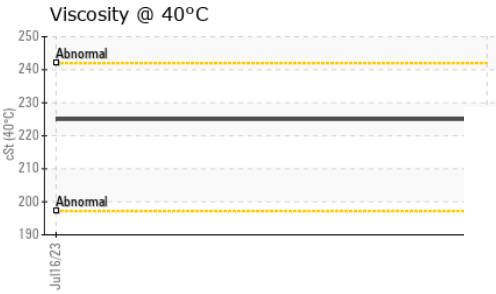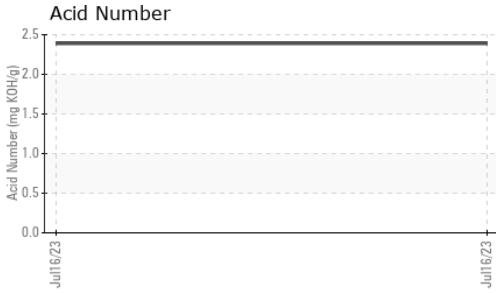

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		225	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

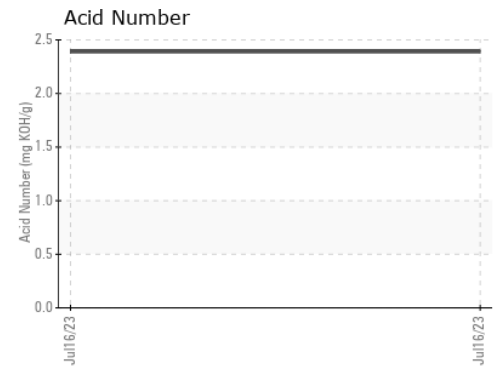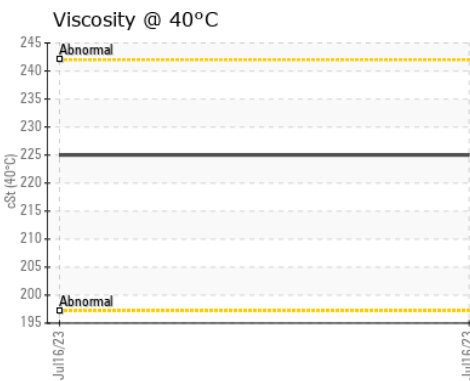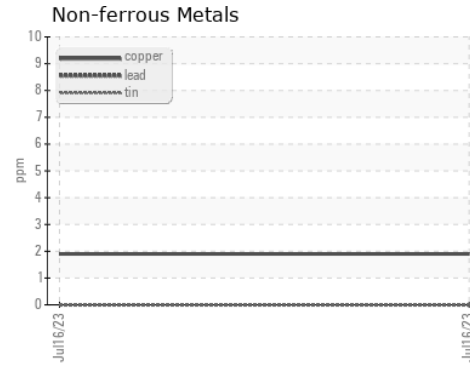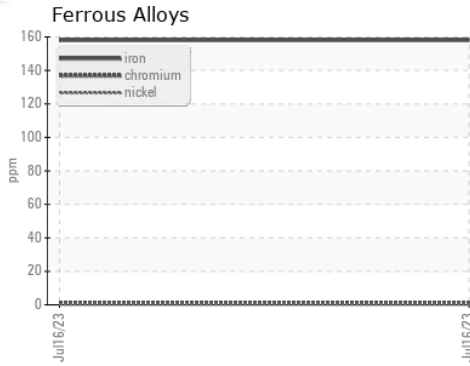

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0100298 **Received** : 17 Jul 2023
Lab Number : 05900108 **Diagnosed** : 18 Jul 2023
Unique Number : 10561464 **Diagnostician** : Wes Davis
Test Package : IND 2

NATIONAL MATERIAL PROCESSING
 4506 CLINE AVE
 EAST CHICAGO, IN
 US 46312
 Contact: RYAN CANO
 rcano@nmlp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: