

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id 426139 Component Transmission (Auto)

DEXRON III (--- GAL)

DIAGNOSIS Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.


| | | | mapLoco | | | |
|------------------|--------|----------------------------------|------------|-------------|-------------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | GFL0085452 | GFL0075364 | |
| Sample Date | | Client Info | | 11 Jul 2023 | 25 May 2023 | |
| Machine Age | mls | Client Info | | 217792 | 217070 | |
| Oil Age | mls | Client Info | | 217792 | 0 | |
| Oil Changed | | Client Info | | Changed | Changed | |
| Sample Status | | | | NORMAL | NORMAL | |
| WEAR METAL | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >160 | 63 | 150 | |
| Chromium | ppm | ASTM D5185m | >5 | <1 | 0 | |
| Nickel | ppm | ASTM D5185m | >5 | <1 | 0 | |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | |
| Silver | ppm | ASTM D5185m | >5 | <1 | 0 | |
| Aluminum | ppm | ASTM D5185m | >50 | 17 | 43 | |
| Lead | ppm | ASTM D5185m | >50 | 8 | 16 | |
| Copper | ppm | ASTM D5185m | >225 | 197 | 65 | |
| Tin | ppm | ASTM D5185m | >10 | 2 | 3 | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 69 | 58 | |
| Barium | ppm | ASTM D5185m | | 0 | 0 | |
| Molybdenum | ppm | ASTM D5185m | | <1 | 0 | |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | |
| Magnesium | ppm | ASTM D5185m | | 0 | <1 | |
| Calcium | ppm | ASTM D5185m | | 362 | 65 | |
| Phosphorus | ppm | ASTM D5185m | | 425 | 174 | |
| Zinc | ppm | ASTM D5185m | | 26 | 6 | |
| Sulfur | ppm | ASTM D5185m | | 1232 | 602 | |
| CONTAMINAN | TS | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >20 | 5 | 4 | |
| Sodium | ppm | ASTM D5185m | | 3 | 5 | |
| Potassium | ppm | ASTM D5185m | >20 | 3 | <1 | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | |
| Silt | scalar | *Visual | NONE | NONE | NONE | |
| Debris | scalar | *Visual | NONE | NONE | NONE | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | |
| Appearance | scalar | *Visual | NORML | NORML | NORML | |
| Odor | scalar | *Visual | NORML | NORML | NORML | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | |
| Free Water | scalar | *Visual | | NEG | NEG | |
| FLUID PROPE | RTIES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 35.0 | 27.3 | 23.9 | |
| 2:11:06) Rev: 1 | | Submitted By: TECHNICIAN ACCOUNT | | | | |

Report Id: GFL983 [WUSCAR] 05900347 (Generated: 07/19/2023 12:11:06) Rev: 1

Submitted By: TECHNICIAN ACCOUNT



OIL ANALYSIS REPORT

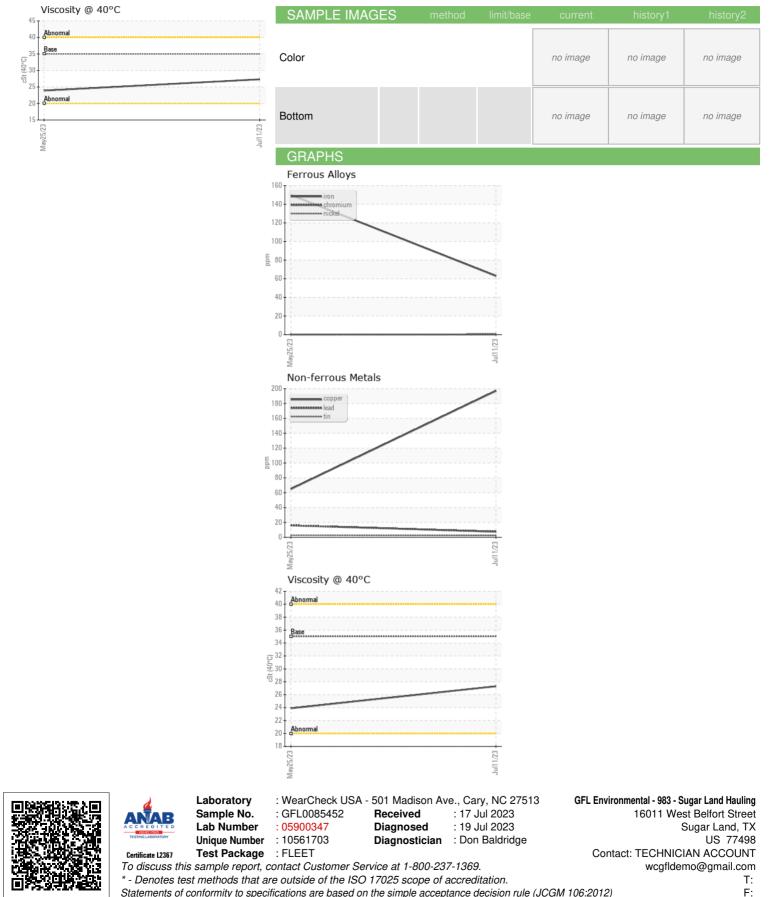

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: TECHNICIAN ACCOUNT