


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

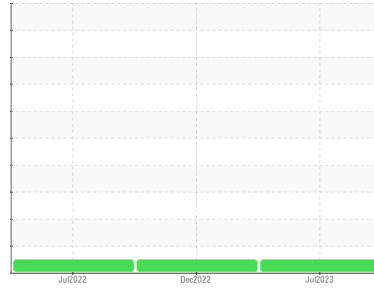

Machine Id  
**DT787**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0096944</b>	PCA0080895	PCA0074773
Sample Date	Client Info			<b>05 Jul 2023</b>	29 Dec 2022	07 Jul 2022
Machine Age	mls	Client Info		<b>102990</b>	77690	52614
Oil Age	mls	Client Info		<b>25300</b>	77690	0
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	<b>46</b>	86	89
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>21</b>	44	41
Lead	ppm	ASTM D5185m	>50	<b>16</b>	34	35
Copper	ppm	ASTM D5185m	>225	<b>16</b>	16	15
Tin	ppm	ASTM D5185m	>10	<b>4</b>	8	8
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>90</b>	87	105
Barium	ppm	ASTM D5185m		<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m		<b>2</b>	1	1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	2
Magnesium	ppm	ASTM D5185m		<b>11</b>	3	1
Calcium	ppm	ASTM D5185m		<b>119</b>	82	61
Phosphorus	ppm	ASTM D5185m		<b>285</b>	257	257
Zinc	ppm	ASTM D5185m		<b>33</b>	17	4
Sulfur	ppm	ASTM D5185m		<b>2284</b>	1174	1325

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	6	6
Sodium	ppm	ASTM D5185m		<b>1</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	4	7

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG




FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	35.0	<b>34.6</b>	35.1	34.7

# OIL ANALYSIS REPORT

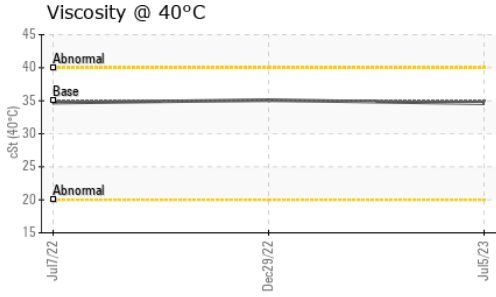

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

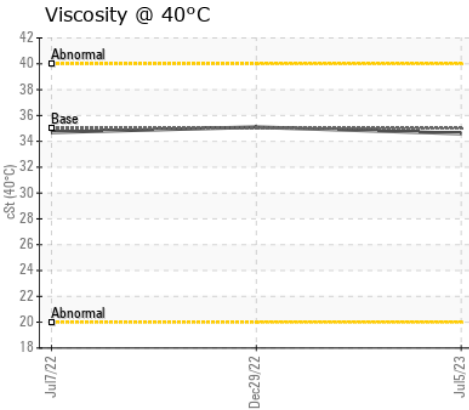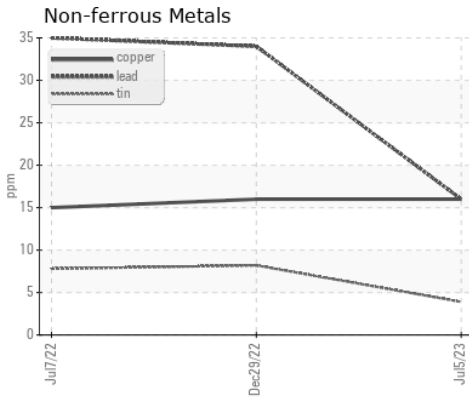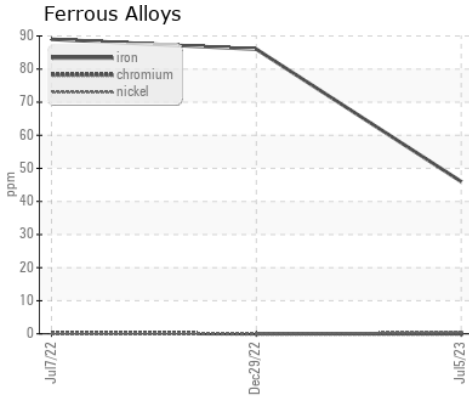

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096944  
**Lab Number** : 05900353  
**Unique Number** : 10561709  
**Test Package** : FLEET

**NW WHITE & CO - ANDERSON DIVISION**  
 2605 RIVER RD  
 PIEDMONT, SC  
 US 29673  
 Contact: James Threatt  
 jthreatt@nwwhite.com  
 T: (864)918-4646  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)