

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
CRSH066
Component
Right Final Drive
Fluid

PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Sampled fluid)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0084611	---	---
Sample Date	Client Info	07 Jul 2023	---	---
Machine Age	hrs Client Info	3833	---	---
Oil Age	hrs Client Info	3833	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >500	293	---	---
Chromium ppm	ASTM D5185m >10	8	---	---
Nickel ppm	ASTM D5185m >10	<1	---	---
Titanium ppm	ASTM D5185m	0	---	---
Silver ppm	ASTM D5185m	0	---	---
Aluminum ppm	ASTM D5185m >25	<1	---	---
Lead ppm	ASTM D5185m >25	51	---	---
Copper ppm	ASTM D5185m >50	36	---	---
Tin ppm	ASTM D5185m >10	2	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 2	9	---	---
Barium ppm	ASTM D5185m 0	2	---	---
Molybdenum ppm	ASTM D5185m 0	0	---	---
Manganese ppm	ASTM D5185m 0	11	---	---
Magnesium ppm	ASTM D5185m 9	1	---	---
Calcium ppm	ASTM D5185m 3114	50	---	---
Phosphorus ppm	ASTM D5185m 1099	250	---	---
Zinc ppm	ASTM D5185m 1245	19	---	---
Sulfur ppm	ASTM D5185m 7086	13211	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >75	15	---	---
Sodium ppm	ASTM D5185m	1	---	---
Potassium ppm	ASTM D5185m >20	3	---	---


VISUAL

method	limit/base	current	history1	history2
White Metal scalar	*Visual NONE	NONE	---	---
Yellow Metal scalar	*Visual NONE	NONE	---	---
Precipitate scalar	*Visual NONE	NONE	---	---
Silt scalar	*Visual NONE	LIGHT	---	---
Debris scalar	*Visual NONE	NONE	---	---
Sand/Dirt scalar	*Visual NONE	NONE	---	---
Appearance scalar	*Visual NORML	NORML	---	---
Odor scalar	*Visual NORML	NORML	---	---
Emulsified Water scalar	*Visual >0.2	NEG	---	---
Free Water scalar	*Visual	NEG	---	---

FLUID PROPERTIES









method	limit/base	current	history1	history2
Visc @ 40°C cSt	ASTM D445 213.9	144	---	---

OIL ANALYSIS REPORT

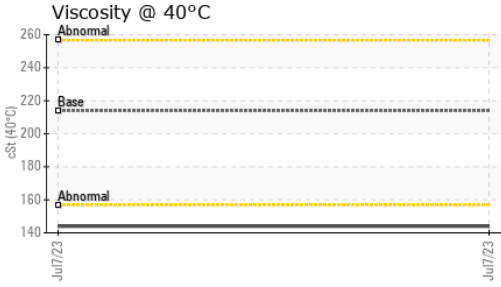

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

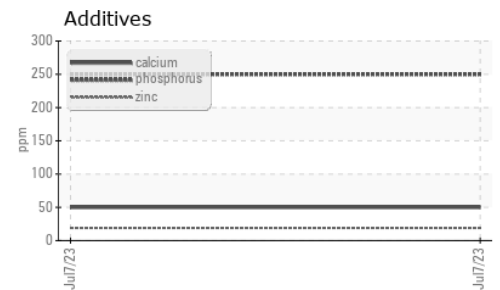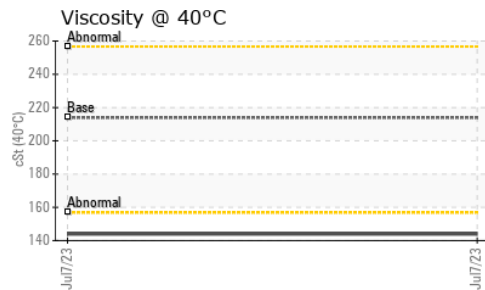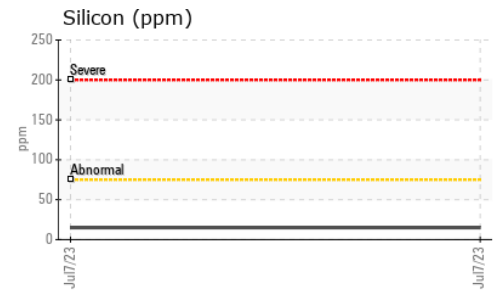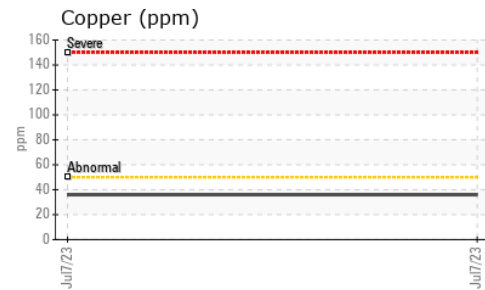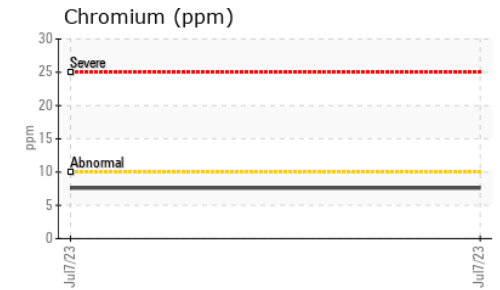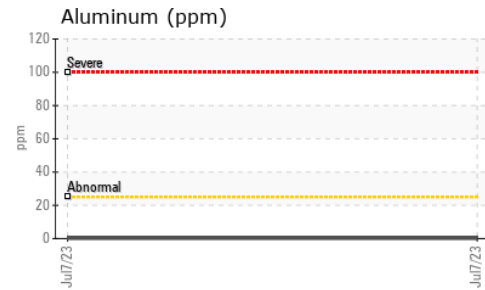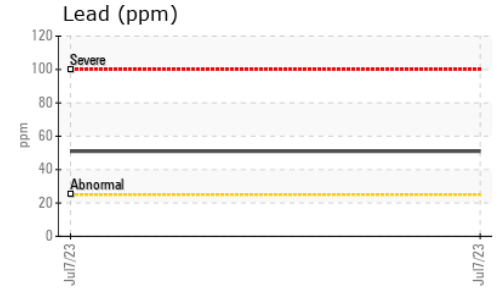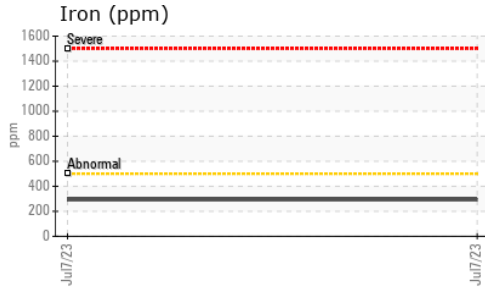

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0084611 **Received** : 17 Jul 2023
Lab Number : 05900813 **Diagnosed** : 20 Jul 2023
Unique Number : 10562169 **Diagnostician** : Jonathan Hester
Test Package : MOB 1

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: