


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / MUSKOGEE SAND**  
Machine Id  
**WL042**  
Component  
**Transmission (Manual)**  
Fluid  
**MOBIL MOBILTRANS HD 30 (--- GAL)**

Sample Rating Trend

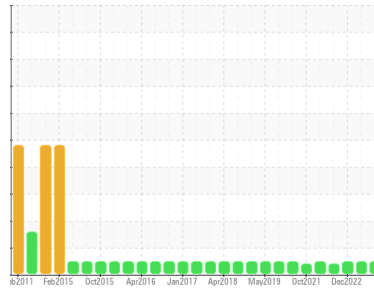

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: PM-4 changed fluid and filters )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0084617</b>	PCA0087101	PCA0070527
Sample Date	Client Info		<b>11 Jul 2023</b>	23 May 2023	29 Dec 2022
Machine Age	hrs	Client Info	<b>244227</b>	31670	31010
Oil Age	hrs	Client Info	<b>29950</b>	660	540
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>39</b>	33	34
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	9	<1
Lead	ppm	ASTM D5185m >45	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m >225	<b>105</b>	66	11
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>4</b>	4	5
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>34</b>	43	64
Calcium	ppm	ASTM D5185m	<b>2638</b>	2456	2633
Phosphorus	ppm	ASTM D5185m	<b>870</b>	864	953
Zinc	ppm	ASTM D5185m	<b>1054</b>	1060	1125
Sulfur	ppm	ASTM D5185m	<b>3621</b>	3629	4618

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>18</b>	32	11
Sodium	ppm	ASTM D5185m	<b>0</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	2


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES









	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 100	<b>87.2</b>	89.6	88.9

# OIL ANALYSIS REPORT

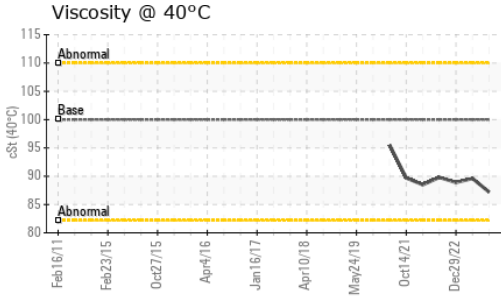

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

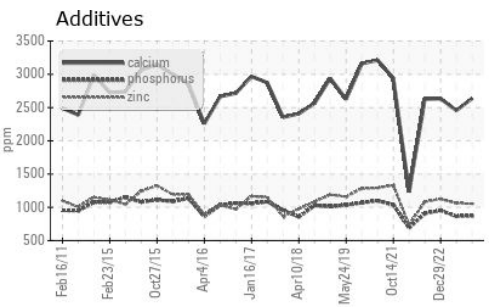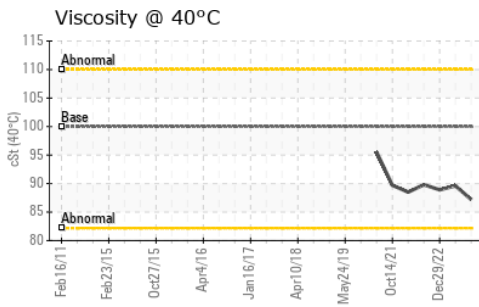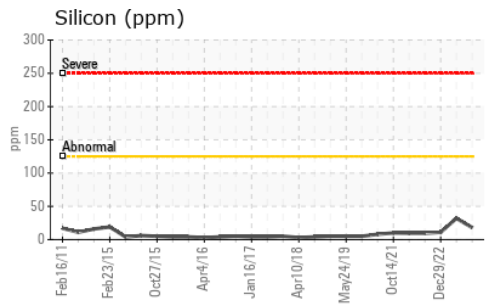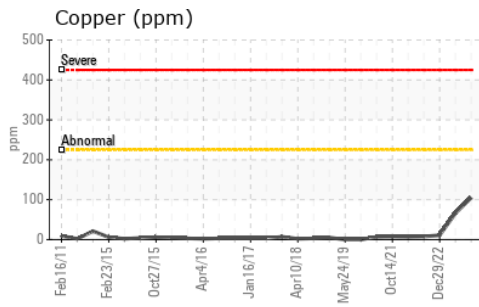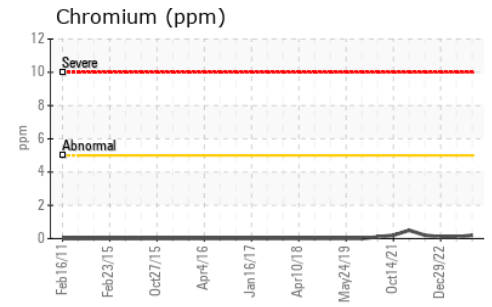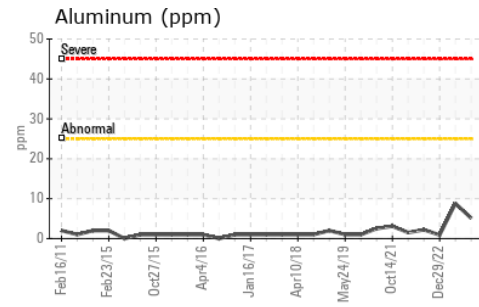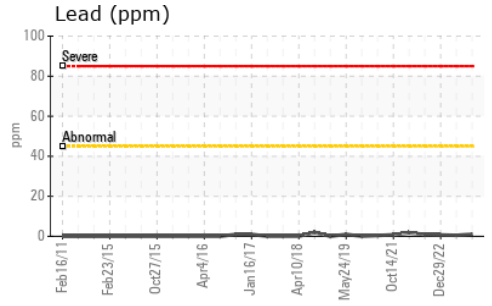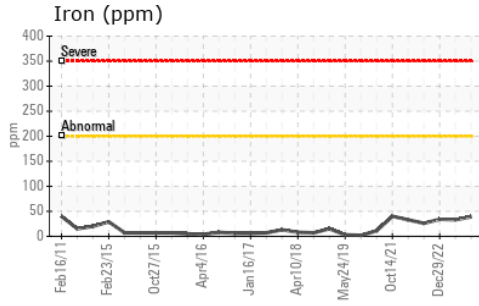

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0084617 **Received** : 17 Jul 2023  
**Lab Number** : 05900871 **Diagnosed** : 19 Jul 2023  
**Unique Number** : 10562227 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**Kemp Quarries - Muskogee Sand**  
 3395 W 50th St N  
 Porter, OK  
 US 74454

Contact: MUSCOGEE NOTIFICATIONS  
 muskogee@muskogeessand.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: