




# OIL ANALYSIS REPORT

Sample Rating Trend

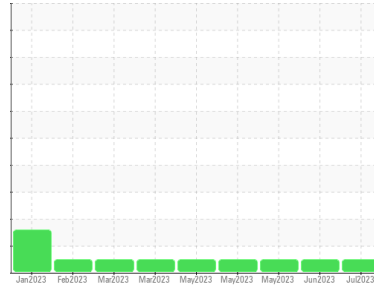

**NORMAL**



Machine Id  
**728007**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0086119</b>	GFL0083259	GFL0082909
Sample Date	Client Info		<b>12 Jul 2023</b>	13 Jun 2023	26 May 2023
Machine Age	hrs	Client Info	<b>11327</b>	11138	10994
Oil Age	hrs	Client Info	<b>1913</b>	1724	10994
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>53</b>	55	49
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>34</b>	27	26
Lead	ppm	ASTM D5185m >50	<b>2</b>	3	3
Copper	ppm	ASTM D5185m >225	<b>32</b>	31	32
Tin	ppm	ASTM D5185m >10	<b>0</b>	1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>69</b>	94	88
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	2
Calcium	ppm	ASTM D5185m	<b>108</b>	108	106
Phosphorus	ppm	ASTM D5185m	<b>248</b>	252	230
Zinc	ppm	ASTM D5185m	<b>&lt;1</b>	2	8
Sulfur	ppm	ASTM D5185m	<b>1817</b>	1715	1630

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	7	5
Sodium	ppm	ASTM D5185m	<b>1</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	2

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 34	<b>32.8</b>	32.8	32.9






# OIL ANALYSIS REPORT

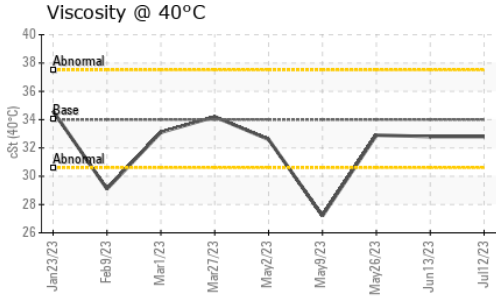

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

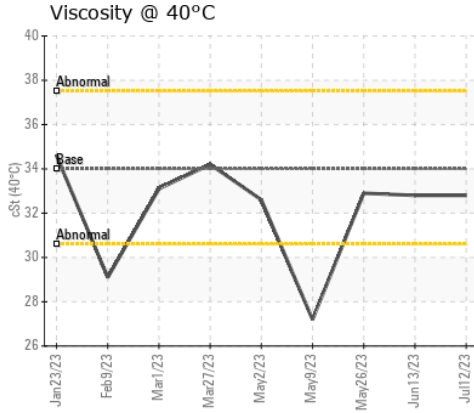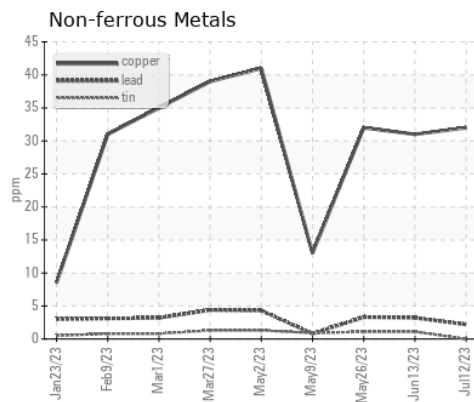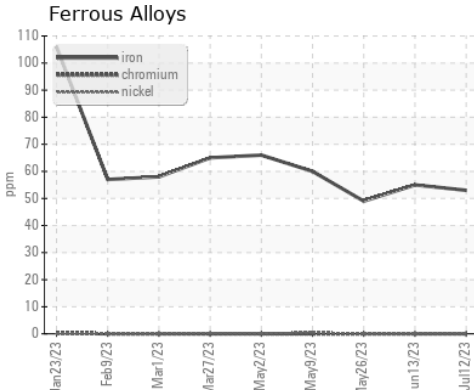

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086119 **Received** : 18 Jul 2023  
**Lab Number** : 05901708 **Diagnosed** : 20 Jul 2023  
**Unique Number** : 10563064 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)