

COMPONENT CONDITION SUMMARY



RECOMMENDATION

The fluid change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL						
Copper	ppm	ASTM D5185m	>60	143						

Customer Id: GFL983 Sample No.: GFL0085448 Lab Number: 05901717 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>


To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend





Component Transmission (Auto) Fluid NOT GIVEN (--- GAL)

Machine Id 420093

DIAGNOSIS

Recommendation

The fluid change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

🔺 Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0085448		
Sample Date		Client Info		12 Jul 2023		
Machine Age	mls	Client Info		112519		
Dil Age	mls	Client Info		112519		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS	S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>220	85		
Chromium	ppm	ASTM D5185m	>2	2		
Nickel	ppm	ASTM D5185m	>5	1		
Fitanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>75	13		
_ead	ppm	ASTM D5185m	>95	0		
Copper	ppm	ASTM D5185m	>60	<u> </u>		
Fin	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		85		
Barium	ppm	ASTM D5185m		0		
lolybdenum	ppm	ASTM D5185m		4		
<i>M</i> anganese	ppm	ASTM D5185m		34		
Agnesium	ppm	ASTM D5185m		4		
Calcium	ppm	ASTM D5185m		427		
Phosphorus	ppm	ASTM D5185m		643		
Zinc	ppm	ASTM D5185m		113		
Sulfur	ppm	ASTM D5185m		2956		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	20		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	1		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D445		33.5		
0:01) Bev: 1					d By: TECHNIC	

Report Id: GFL983 [WUSCAR] 05901717 (Generated: 07/20/2023 13:30:01) Rev: 1

Submitted By: TECHNICIAN ACCOUNT



OIL ANALYSIS REPORT

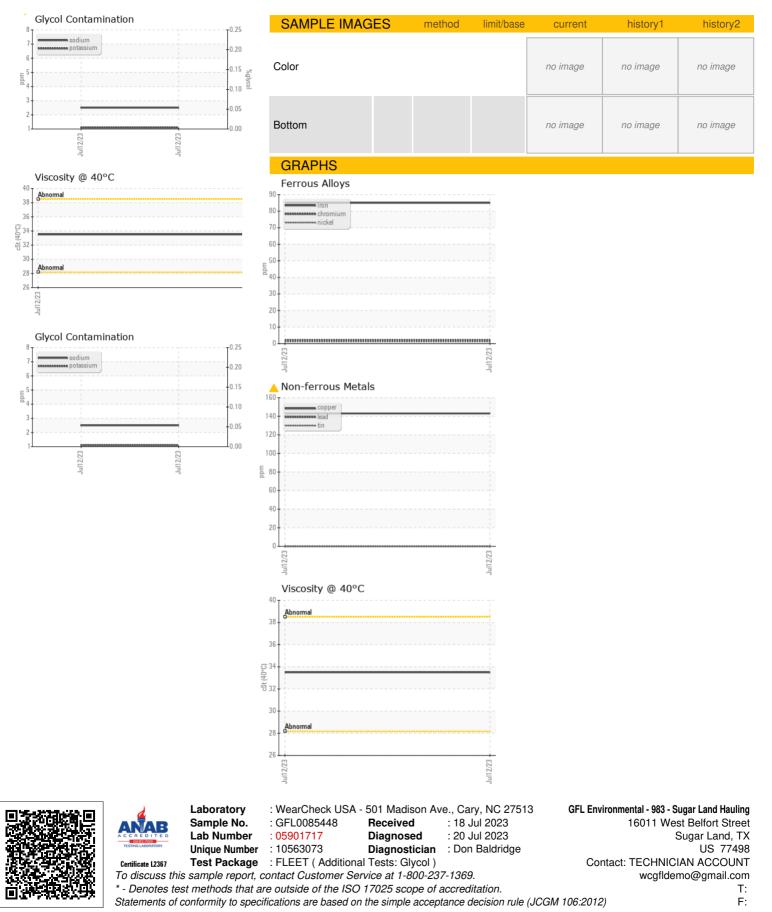

Submitted By: TECHNICIAN ACCOUNT