




# OIL ANALYSIS REPORT

Area  
**{UNASSIGNED}**  
 Machine Id  
**933043**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## Sample Rating Trend

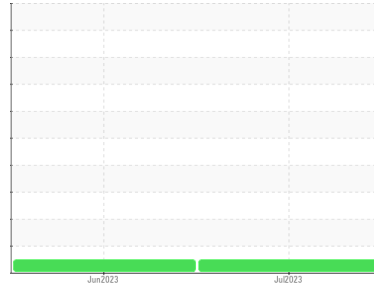

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a components first oil change.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0086121</b>	GFL0080849	---
Sample Date	Client Info		<b>10 Jul 2023</b>	14 Jun 2023	---
Machine Age	hrs	Client Info	<b>292</b>	76	---
Oil Age	hrs	Client Info	<b>292</b>	76	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>54</b>	41	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >2	<b>1</b>	<1	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>8</b>	6	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>17</b>	13	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>28</b>	38	---
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	3	---
Molybdenum	ppm	ASTM D5185m 60	<b>51</b>	48	---
Manganese	ppm	ASTM D5185m 0	<b>15</b>	13	---
Magnesium	ppm	ASTM D5185m 1010	<b>796</b>	795	---
Calcium	ppm	ASTM D5185m 1070	<b>1174</b>	1115	---
Phosphorus	ppm	ASTM D5185m 1150	<b>751</b>	770	---
Zinc	ppm	ASTM D5185m 1270	<b>909</b>	916	---
Sulfur	ppm	ASTM D5185m 2060	<b>2765</b>	2974	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>33</b>	29	---
Sodium	ppm	ASTM D5185m	<b>6</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>36</b>	18	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	7.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	20.6	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.6</b>	18.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	8.3	---







# OIL ANALYSIS REPORT

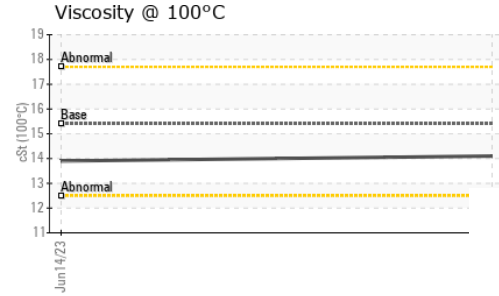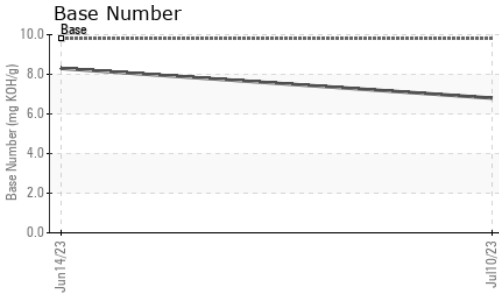

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	13.9

## GRAPHS

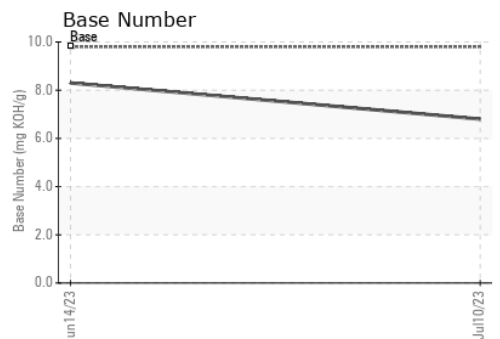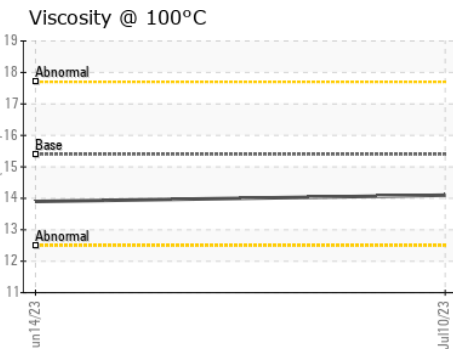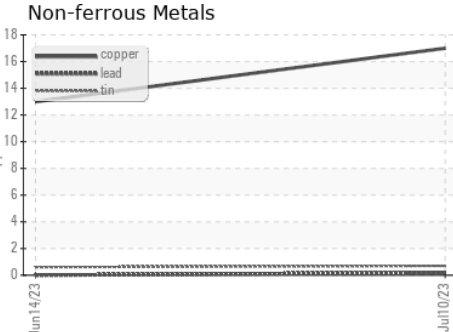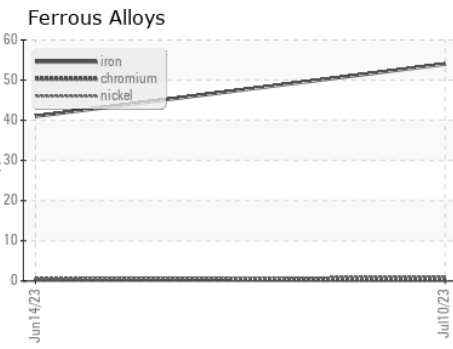

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086121 **Received** : 19 Jul 2023  
**Lab Number** : **05902039** **Diagnosed** : 20 Jul 2023  
**Unique Number** : 10563395 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)