
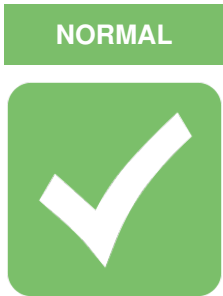


# OIL ANALYSIS REPORT

Sample Rating Trend

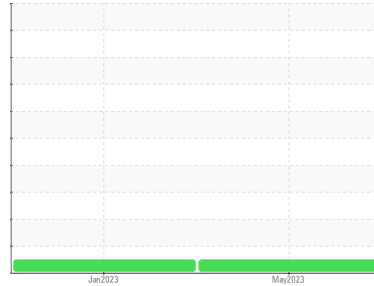

Machine Id  
**FREIGHTLINER 73**

Component  
**Diesel Engine**

Fluid  
**PHILLIPS 66 Fleet Supreme EC 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0096632</b>	PCA0080672	---
Sample Date	Client Info		<b>31 May 2023</b>	26 Jan 2023	---
Machine Age	mls	Client Info	<b>751889</b>	731349	---
Oil Age	mls	Client Info	<b>20540</b>	24864	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>25</b>	29	---
Chromium	ppm	ASTM D5185m >5	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m >30	<b>9</b>	11	---
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >150	<b>4</b>	6	---
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>2</b>	21	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>63</b>	44	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>896</b>	98	---
Calcium	ppm	ASTM D5185m	<b>1424</b>	2137	---
Phosphorus	ppm	ASTM D5185m 1116	<b>1082</b>	896	---
Zinc	ppm	ASTM D5185m 1250	<b>1332</b>	1106	---
Sulfur	ppm	ASTM D5185m	<b>3588</b>	3200	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	6	---
Sodium	ppm	ASTM D5185m	<b>3</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.9	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	10.7	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.5</b>	25.9	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.9</b>	20.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.7	<b>7.5</b>	5.3	---









# OIL ANALYSIS REPORT

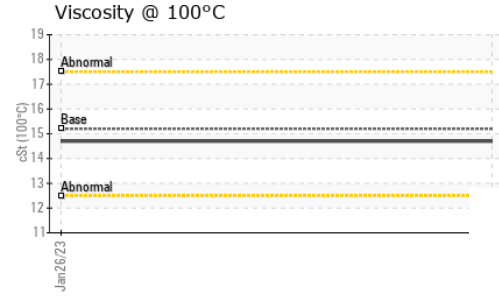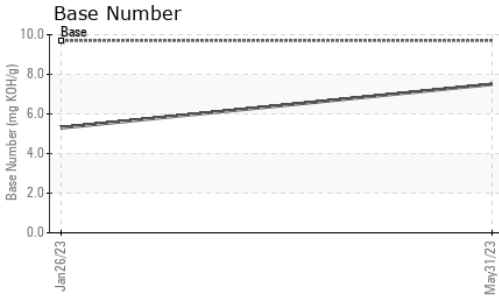

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.2	<b>14.7</b>	14.7	---

## GRAPHS

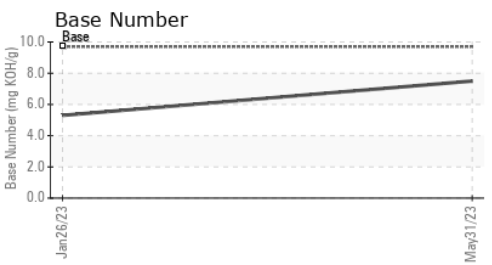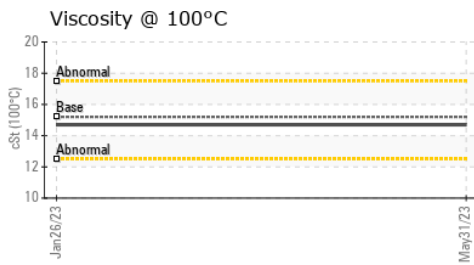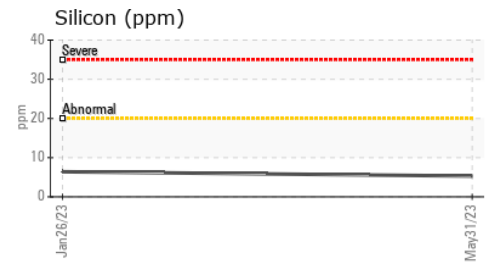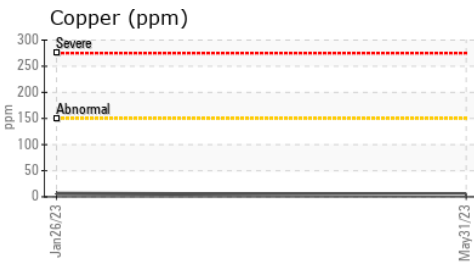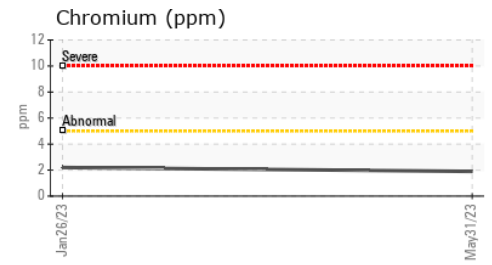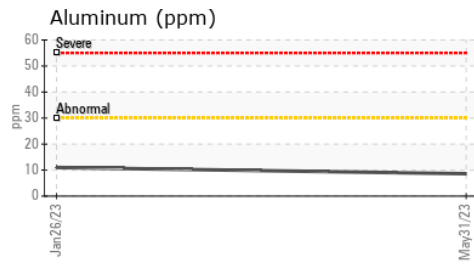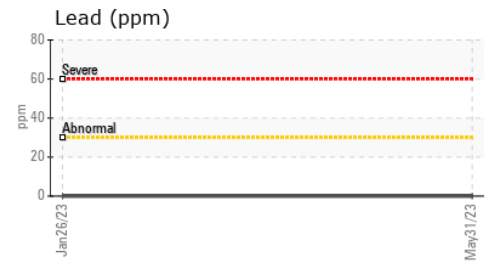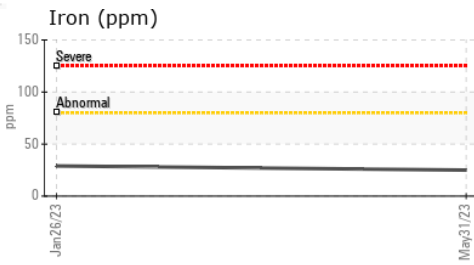

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096632      **Received** : 19 Jul 2023  
**Lab Number** : **05902046**      **Diagnosed** : 20 Jul 2023  
**Unique Number** : 10563402      **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**AREA WIDE TRANSPORTATION**  
 3085 IL RT 71  
 OTTAWA, IL  
 US 61350  
 Contact: JEFF  
 jeff@driveawt.com  
 T: (815)587-2947  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)