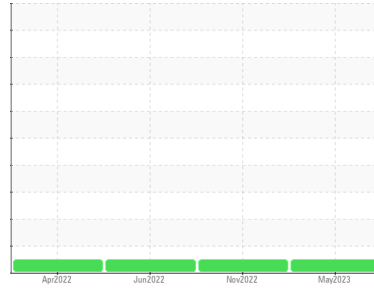


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Machine Id
62
 Component
Diesel Engine
 Fluid
PHILLIPS 66 Fleet Supreme EC 15W40 (--- GAL)

DIAGNOSIS
Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0096633	PCA0088222	PCA0073746
Sample Date	Client Info			26 May 2023	30 Nov 2022	24 Jun 2022
Machine Age	mls	Client Info		268241	243558	217648
Oil Age	mls	Client Info		24683	25870	20577
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	9	10	6
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	<1	<1	2
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2	8	10
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		65	58	55
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		1024	931	915
Calcium	ppm	ASTM D5185m		1301	1225	1271
Phosphorus	ppm	ASTM D5185m	1116	1110	1021	1010
Zinc	ppm	ASTM D5185m	1250	1324	1243	1230
Sulfur	ppm	ASTM D5185m		3644	3460	3604

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	4
Sodium	ppm	ASTM D5185m		2	1	1
Potassium	ppm	ASTM D5185m	>20	0	0	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	10.5	10.4	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.3	23.0	21.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.3	19.8	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.7	7.3	7.7	7.7









OIL ANALYSIS REPORT

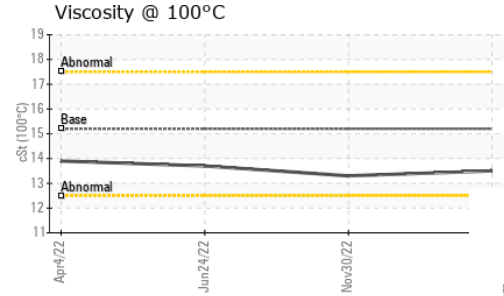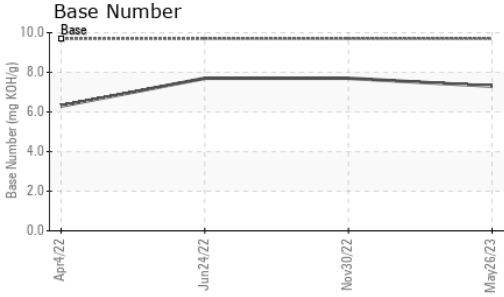

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.2	13.5	13.3	13.7

GRAPHS

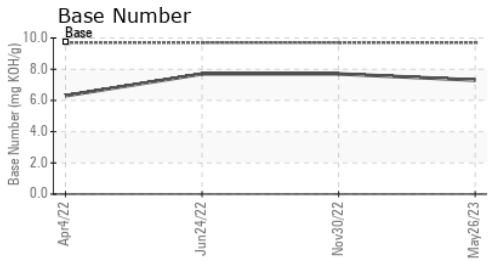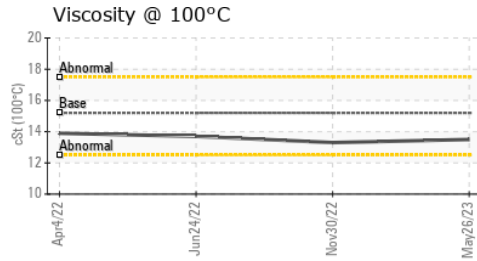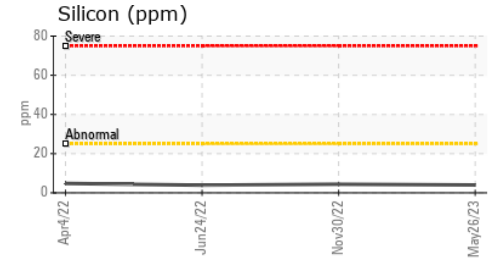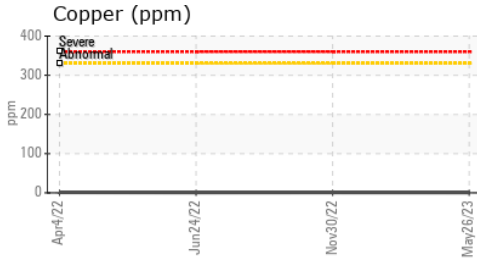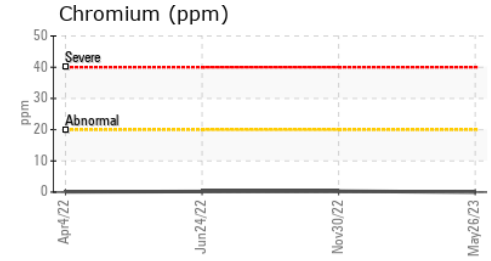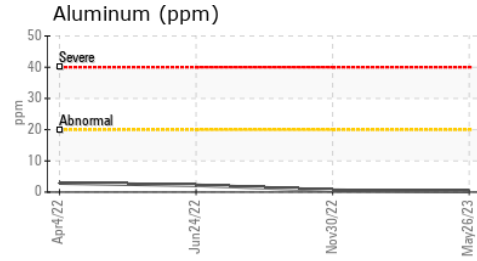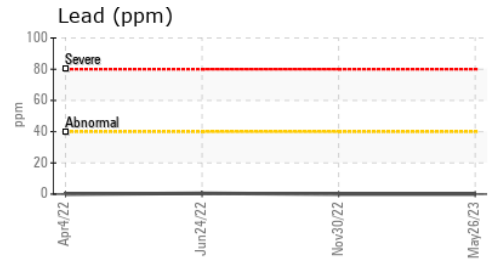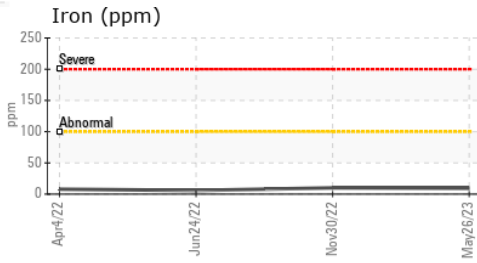

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0096633 **Received** : 19 Jul 2023
Lab Number : **05902047** **Diagnosed** : 20 Jul 2023
Unique Number : 10563403 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

AREA WIDE TRANSPORTATION
 3085 IL RT 71
 OTTAWA, IL
 US 61350
 Contact: JEFF
 jeff@driveawt.com
 T: (815)587-2947
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)