


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

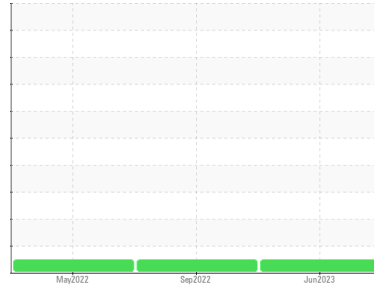

Machine Id  
**KENWORTH 65**

Component  
**Diesel Engine**

Fluid  
**PHILLIPS 66 Fleet Supreme EC 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0096636</b>	PCA0076816	PCA0073758
Sample Date	Client Info		<b>15 Jun 2023</b>	15 Sep 2022	06 May 2022
Machine Age	mls	Client Info	<b>284316</b>	240393	207263
Oil Age	mls	Client Info	<b>43923</b>	33130	38928
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>9</b>	13	13
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	1	3
Silver	ppm	ASTM D5185m >3	<b>0</b>	1	<1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	3	3
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	3	13
Barium	ppm	ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>59</b>	57	45
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>936</b>	937	895
Calcium	ppm	ASTM D5185m	<b>1375</b>	1114	1305
Phosphorus	ppm	ASTM D5185m 1116	<b>1052</b>	1020	1047
Zinc	ppm	ASTM D5185m 1250	<b>1255</b>	1235	1207
Sulfur	ppm	ASTM D5185m	<b>3512</b>	3145	2688

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	7	4
Sodium	ppm	ASTM D5185m	<b>2</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	0



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.8	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	11.2	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.3</b>	24.7	21.0

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	20.5	16.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.7	<b>8.0</b>	7.4	7.4









# OIL ANALYSIS REPORT

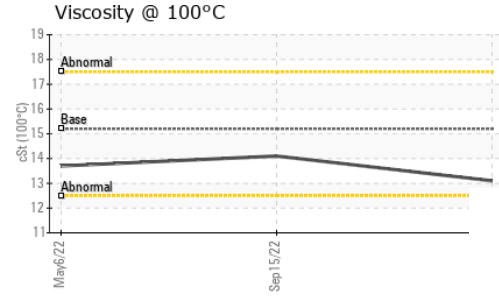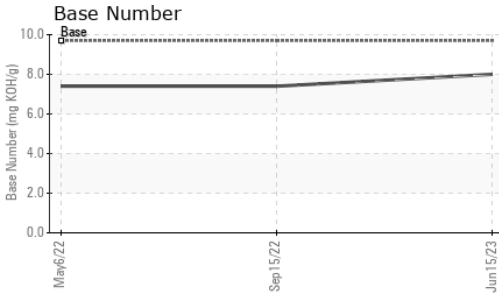

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.2	13.1	14.1

## GRAPHS

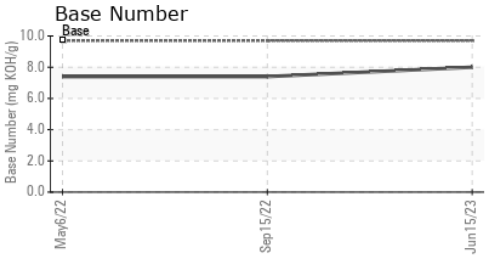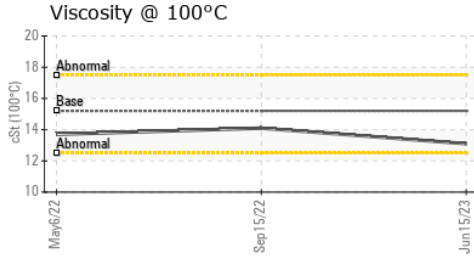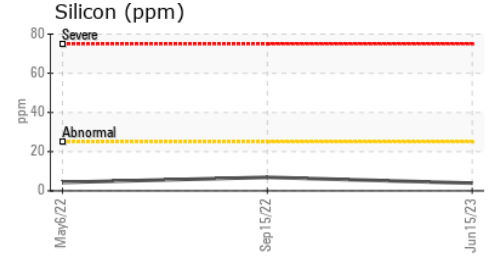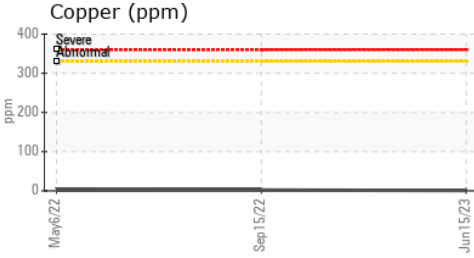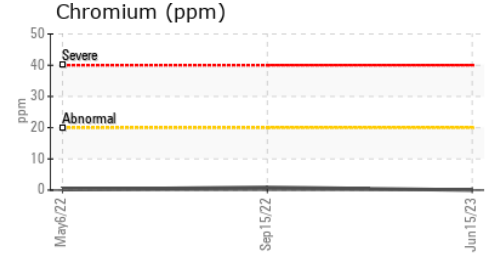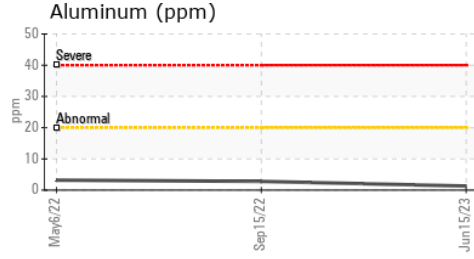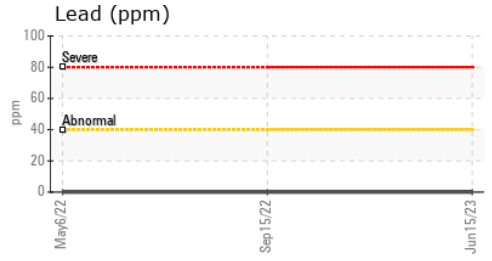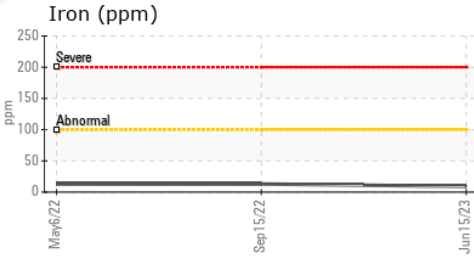

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096636 **Received** : 19 Jul 2023  
**Lab Number** : 05902050 **Diagnosed** : 20 Jul 2023  
**Unique Number** : 10563406 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**AREA WIDE TRANSPORTATION**  
 3085 IL RT 71  
 OTTAWA, IL  
 US 61350  
 Contact: JEFF  
 jeff@driveawt.com  
 T: (815)587-2947  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)