


PROBLEM SUMMARY

PROBLEM SUMMARY


PASTA [98286395] Machine Id C PRESS MAIN MIXER ROTOMISSION

Component **Gearbox**

GEAR OIL ISO 150 (--- GAL)

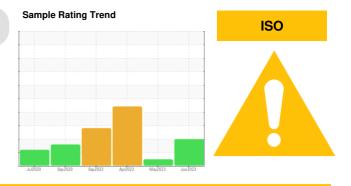

COMPONENT CONDITION SUMMARY

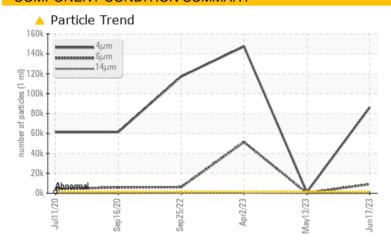

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

| PROBLEMATIC TE | ST RESULTS | | | |
|-----------------|--------------------|-----------------------|----------|------------------|
| Sample Status | | ABNORMAL | NORMAL | SEVERE |
| Particles >4µm | ASTM D7647 >130 | 0 ^ 86232 | 1012 | 147450 |
| Particles >6µm | ASTM D7647 >320 | <u></u> 49179 <u></u> | 242 | 51459 |
| Particles >14µm | ASTM D7647 >80 | <u> </u> | 25 | △ 330 |
| Particles >21µm | ASTM D7647 >20 | 22 | 10 | ▲ 37 |
| Oil Cleanliness | ISO 4406 (c) >17/1 | 5/13 🔺 24/20/14 | 17/15/12 | 2 4/23/16 |

Customer Id: KRASPRMO Sample No.: PCA0076162 Lab Number: 05902260 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Filter | | | ? | We recommend you service the filters on this component if applicable. |

HISTORICAL DIAGNOSIS

13 May 2023 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



02 Apr 2023 Diag: Doug Bogart

ISO



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report

25 Sep 2022 Diag: Jonathan Hester

WEAR



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. The lead level is marginal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






OIL ANALYSIS REPORT

PASTA [98286395] **C PRESS MAIN MIXER ROTOMISSION**

Gearbox

GEAR OIL ISO 150 (--- GAL)





DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORI | MATION | method | limit/base | current | history1 | history2 |
|--|--------|---|----------------------------------|--|-------------------------------|-------------------------------------|
| Sample Number | | Client Info | | PCA0076162 | PCA0096814 | PCA0081563 |
| Sample Date | | Client Info | | 17 Jun 2023 | 13 May 2023 | 02 Apr 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | ABNORMAL | NORMAL | SEVERE |
| WEAR METAL | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 3 | <1 | 4 |
| Chromium | ppm | ASTM D5185m | >15 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | <1 | 2 |
| Lead | ppm | ASTM D5185m | >100 | 6 | <1 | 4 |
| Copper | ppm | ASTM D5185m | >200 | 0 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >25 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 50 | 0 | 1 | 0 |
| Barium | ppm | ASTM D5185m | 15 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 15 | 0 | <1 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 50 | <1 | 10 | 1 |
| Calcium | ppm | ASTM D5185m | 50 | 1 | 0 | 5 |
| Phosphorus | ppm | ASTM D5185m | 350 | 100 | 119 | 111 |
| Zinc | ppm | ASTM D5185m | 100 | 0 | 7 | <1 |
| Sulfur | ppm | ASTM D5185m | 12500 | 0 | 88 | 18 |
| CONTAMINAN | TS | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 5 | 2 | 8 |
| Sodium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| | | AOTA DE LOE | | | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | <1 | 0 |
| Potassium FLUID CLEANI | | | >20 limit/base | | <1 history1 | 0 history2 |
| | | | | | | - |
| FLUID CLEANL | | method | limit/base | current | history1 | history2 |
| FLUID CLEANI Particles >4µm Particles >6µm | | method ASTM D7647 | limit/base >1300 | current ▲ 86232 | history1 1012 | history2 147450 |
| FLUID CLEANI Particles >4μm Particles >6μm Particles >14μm | | method ASTM D7647 ASTM D7647 | limit/base >1300 >320 | current ▲ 86232 ▲ 9179 | history1 1012 242 | history2 147450 51459 |
| FLUID CLEANI Particles >4μm Particles >6μm Particles >14μm Particles >21μm | | ASTM D7647 ASTM D7647 ASTM D7647 | limit/base >1300 >320 >80 | current ▲ 86232 ▲ 9179 ▲ 107 | history1 1012 242 25 | history2 147450 51459 330 |
| FLUID CLEAN | | Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | limit/base | current ▲ 86232 ▲ 9179 ▲ 107 ▲ 22 | history1 1012 242 25 10 | history2 |
| FLUID CLEANI Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | | method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | limit/base >1300 >320 >80 >20 >4 | current ▲ 86232 ▲ 9179 ▲ 107 ▲ 22 0 | history1 1012 242 25 10 | history2 147450 51459 330 37 4 |

Acid Number (AN) mg KOH/g ASTM D8045 0.85

0.37

0.36

0.33



OIL ANALYSIS REPORT







Certificate L2367

Laboratory Sample No. Lab Number

: PCA0076162 : 05902260 : 10563616

Unique Number

Test Package : PLANT (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Diagnostician

: 19 Jul 2023

: 21 Jul 2023

: Don Baldridge

Received

Diagnosed

KraftHeinz - Springfield - Plant 8311 PCA

2035 E BENNETT SPRINGFIELD, MO

US 65804

Contact: Service Manager

T: F: