

## **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL



## Area {UNASSIGNED} 933043

Component Transmission (Auto)

Fluid


PETRO CANADA DuraDrive HD Synthetic 668 (8 GAL)

DIAGNOSIS	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		GFL0086122	GFL0080848	
Resample at the next service interval to monitor.	Sample Date		Client Info		10 Jul 2023	14 Jun 2023	
Wear	Machine Age	hrs	Client Info		292	76	
All component wear rates are normal.	Oil Age	hrs	Client Info		292	76	
•	Oil Changed		Client Info		Not Changd	Not Changd	
<b>Contamination</b> There is no indication of any contamination in the	Sample Status				NORMAL	NORMAL	
fluid.	WEAR METAL	c	method	limit/base			history2
Fluid Condition					current	history1	
The condition of the fluid is acceptable for the time	Iron	ppm	ASTM D5185m		30	17	
in service.	Chromium	ppm	ASTM D5185m		0	0	
	Nickel	ppm	ASTM D5185m		0	0	
	Titanium	ppm	ASTM D5185m		0	<1	
	Silver	ppm	ASTM D5185m		0	0	
	Aluminum	ppm	ASTM D5185m		6	2	
	Lead	ppm	ASTM D5185m		<1	0	
	Copper	ppm	ASTM D5185m		6	2	
	Tin	ppm	ASTM D5185m	>10	<1	<1	
	Vanadium	ppm	ASTM D5185m		0	<1	
	Cadmium	ppm	ASTM D5185m		0	0	
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		66	69	
	Barium	ppm	ASTM D5185m		0	0	
	Molybdenum	ppm	ASTM D5185m		<1	<1	
	Manganese	ppm	ASTM D5185m		1	1	
	Magnesium	ppm	ASTM D5185m		0	0	
	Calcium	ppm	ASTM D5185m		131	132	
	Phosphorus	ppm	ASTM D5185m		217	217	
	Zinc	ppm	ASTM D5185m		10	2	
	Sulfur	ppm	ASTM D5185m		2075	2038	
	CONTAMINAN	ITS	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>20	4	4	
	Sodium	ppm	ASTM D5185m		6	4	
	Potassium	ppm	ASTM D5185m	>20	4	2	
	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
	Precipitate	scalar	*Visual	NONE	NONE	NONE	
	Silt		*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
	Appearance	scalar	*Visual	NORML	NORML	NORML	
	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	
	Free Water	scalar	*Visual		NEG	NEG	
	FLUID PROPE	RTIES	method	limit/base		history1	history2
Denert Id. CEI 010 IM/UCCADI 05000000 (Consultado 07/01/0000	Visc @ 40°C	cSt	ASTM D445	34	32.9	33.4	

33.4 Submitted By: TECHNICIAN ACCOUNT



## **OIL ANALYSIS REPORT**

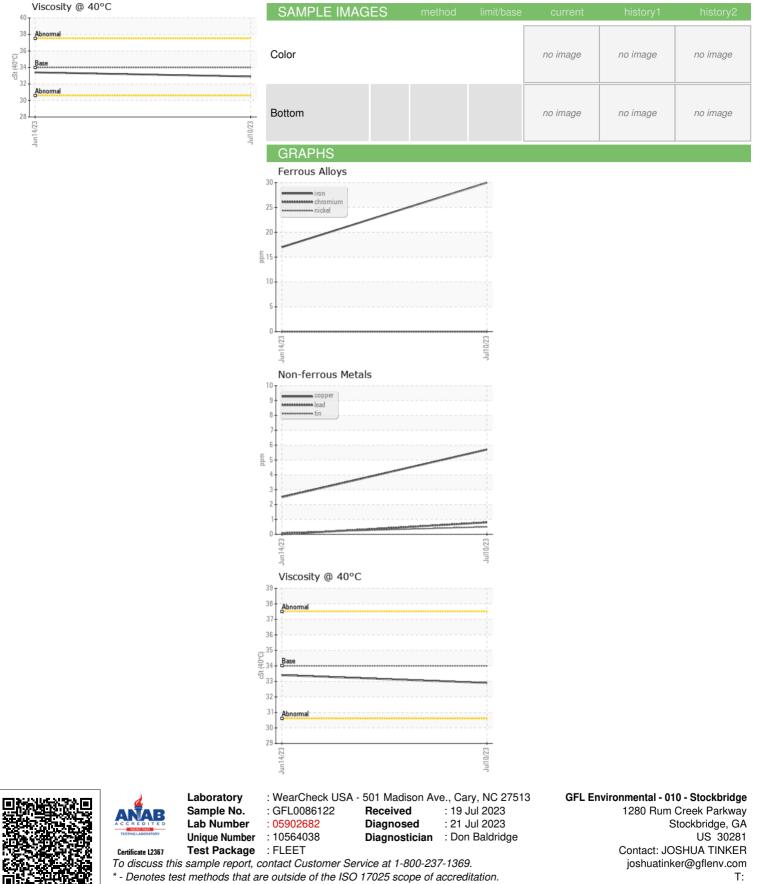

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: TECHNICIAN ACCOUNT

F: