

## **OIL ANALYSIS REPORT**

Sample Rating Trend

### NORMAL

#### Area (92426X) Walgreens Machine Id [Walgreens] 136A62013 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


				Jul2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0088336		
Sample Date		Client Info		10 Jul 2023		
Machine Age	mls	Client Info		354579		
Oil Age	mls	Client Info		25000		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>2.0	<1.0		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	38		
Chromium	ppm	ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	19		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	1		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	Method ASTM D5185m	limit/base	current	history1	history2
	ppm ppm					
Boron		ASTM D5185m	2	<1		
Boron Barium Molybdenum Manganese	ppm	ASTM D5185m ASTM D5185m	2 0	<1 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50	<1 0 63		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0	<1 0 63 <1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950	<1 0 63 <1 1009		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050	<1 0 63 <1 1009 1138 1053 1342	  	  
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	<1 0 63 <1 1009 1138 1053	   	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180	<1 0 63 <1 1009 1138 1053 1342	   	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	<1 0 63 <1 1009 1138 1053 1342 3829		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	<1 0 63 <1 1009 1138 1053 1342 3829 current	     history1	     history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	<1 0 63 <1 1009 1138 1053 1342 3829 current 3	     history1	     history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 limit/base >25	<1 0 63 <1 1009 1138 1053 1342 3829 current 3 2	     history1	     history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <b>limit/base</b> >25	<1 0 63 <1 1009 1138 1053 1342 3829 current 3 2 20	     history1  	     history2  
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <b>Imit/base</b> >25 >20 <b>Imit/base</b> >3	<1 0 63 <1 1009 1138 1053 1342 3829 current 3 2 20 current	     history1   history1	      history2   history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3	<1 0 63 <1 1009 1138 1053 1342 3829 <u>current</u> 3 2 20 <u>current</u> 0.5	     history1   history1 	     history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <i>limit/base</i> >25 >20 <i>limit/base</i>	<1 0 63 <1 1009 1138 1053 1342 3829 current 3 2 20 current 0.5 10.5	      history1   history1  	     history2  history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 1050 955 1050 995 1180 2600 <b>imit/base</b> >25 <b>imit/base</b> >3 >20	<1 0 63 <1 1009 1138 1053 1342 3829 current 3 2 20 current 0.5 10.5 20.8	      history1  history1  history1	      history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRAE	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7844	2 0 0 50 0 950 1050 995 1180 2600 2600 255 20 220 20 1 imit/base >3 20 >30 3 3 0	<1 0 63 <1 1009 1138 1053 1342 3829 current 3 2 20 current 0.5 10.5 20.8 current	      history1   history1   history1   history1	      history2   history2  history2  




# **OIL ANALYSIS REPORT**


VISUAL







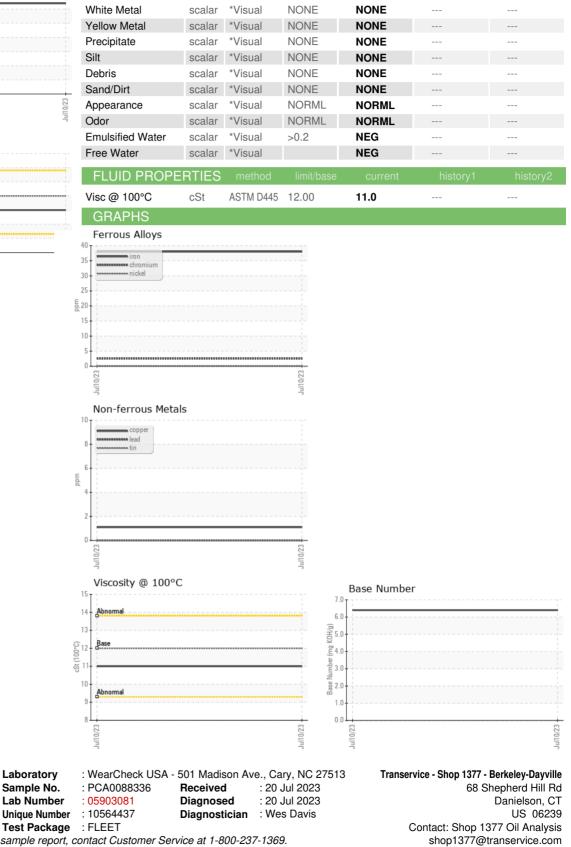



Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T:

F: