



# PROBLEM SUMMARY

Sample Rating Trend


GLYCOL



Machine Id  
**721029-310095**


Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

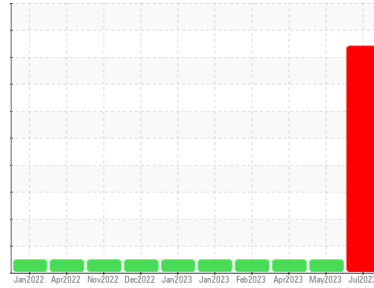

## COMPONENT CONDITION SUMMARY

### Glycol Contamination

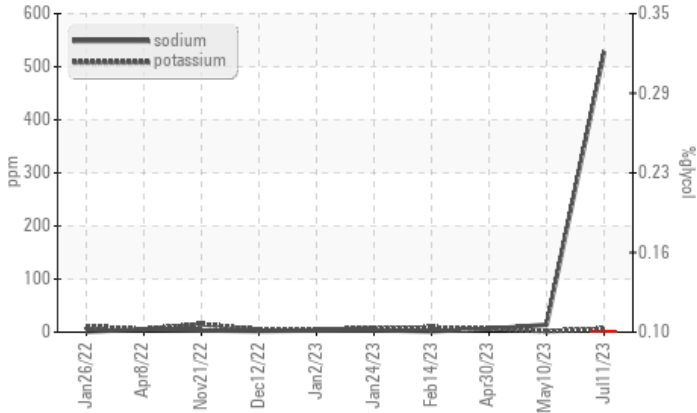

## RECOMMENDATION

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

| Sample Status |     |             |     | SEVERE        | NORMAL | NORMAL |
|---------------|-----|-------------|-----|---------------|--------|--------|
| Sodium        | ppm | ASTM D5185m |     | ▲ <b>528</b>  | 14     | 6      |
| Potassium     | ppm | ASTM D5185m | >20 | ▲ <b>6</b>    | 2      | 7      |
| Glycol        | %   | *ASTM D2982 |     | ● <b>0.10</b> | NEG    | NEG    |

Customer Id: GFL820  
Sample No.: GFL0067725  
Lab Number: 05904113  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action              | Status | Date | Done By | Description   |
|---------------------|--------|------|---------|---|
| Change Fluid        | ---    | ---  | ?       | We recommend that you drain the oil from the component if this has not already been done. |
| Flush System        | ---    | ---  | ?       | We advise that you flush the component thoroughly before re-filling with oil.             |
| Resample            | ---    | ---  | ?       | We recommend an early resample to monitor this condition.                                 |
| Check Glycol Access | ---    | ---  | ?       | We advise that you check for the source of the coolant leak.                              |

## HISTORICAL DIAGNOSIS

### 10 May 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### 30 Apr 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### 14 Feb 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend


GLYCOL



Machine Id  
**721029-310095**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

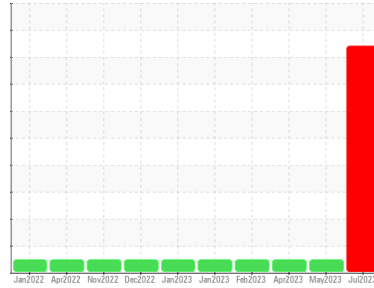

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0067725</b>  | GFL0067678  | GFL0067641  |
| Sample Date   | Client Info | <b>11 Jul 2023</b> | 10 May 2023 | 30 Apr 2023 |
| Machine Age   | hrs         | <b>0</b>           | 0           | 0           |
| Oil Age       | hrs         | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             | <b>SEVERE</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base   | current        | history1 | history2 |
|--------|--------------|----------------|----------|----------|
| Fuel   | WC Method >5 | <b>&lt;1.0</b> | <1.0     | <1.0     |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >100 | <b>21</b>    | 2        | 13       |
| Chromium | ppm ASTM D5185m >20  | <b>1</b>     | 0        | <1       |
| Nickel   | ppm ASTM D5185m >4   | <b>0</b>     | 0        | 0        |
| Titanium | ppm ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm ASTM D5185m >3   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm ASTM D5185m >20  | <b>4</b>     | <1       | 6        |
| Lead     | ppm ASTM D5185m >40  | <b>0</b>     | 0        | 0        |
| Copper   | ppm ASTM D5185m >330 | <b>&lt;1</b> | 0        | <1       |
| Tin      | ppm ASTM D5185m >15  | <b>0</b>     | 0        | 0        |
| Vanadium | ppm ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

| method     | limit/base           | current      | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>22</b>    | <1       | <1       |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm ASTM D5185m 60   | <b>100</b>   | 58       | 60       |
| Manganese  | ppm ASTM D5185m 0    | <b>&lt;1</b> | 0        | <1       |
| Magnesium  | ppm ASTM D5185m 1010 | <b>820</b>   | 934      | 966      |
| Calcium    | ppm ASTM D5185m 1070 | <b>1209</b>  | 1039     | 1058     |
| Phosphorus | ppm ASTM D5185m 1150 | <b>806</b>   | 979      | 1021     |
| Zinc       | ppm ASTM D5185m 1270 | <b>950</b>   | 1208     | 1274     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>2980</b>  | 3376     | 3590     |

## CONTAMINANTS

| method    | limit/base          | current     | history1 | history2 |
|-----------|---------------------|-------------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>8</b>    | 2        | 5        |
| Sodium    | ppm ASTM D5185m     | <b>528</b>  | 14       | 6        |
| Potassium | ppm ASTM D5185m >20 | <b>6</b>    | 2        | 7        |
| Glycol    | % *ASTM D2982       | <b>0.10</b> | NEG      | NEG      |

## INFRA-RED

| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>0.5</b>  | 0.2      | 0.5      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>9.6</b>  | 6.1      | 7.4      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>20.1</b> | 17.1     | 17.3     |


## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>16.4</b> | 12.2     | 13.4     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>10.0</b> | 9.3      | 7.3      |




# OIL ANALYSIS REPORT


### Glycol Contamination

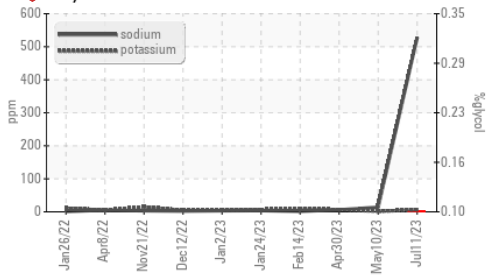

### Base Number

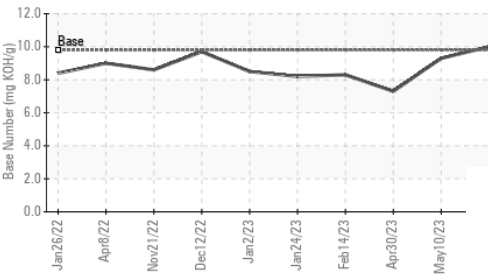

### Viscosity @ 100°C

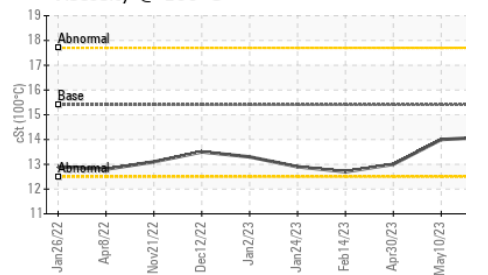


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 14.1     | 14.0     |

### GRAPHS


#### Ferrous Alloys

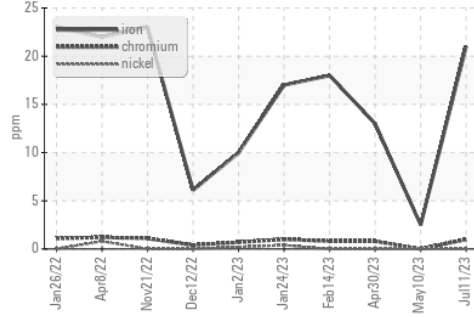


#### Non-ferrous Metals

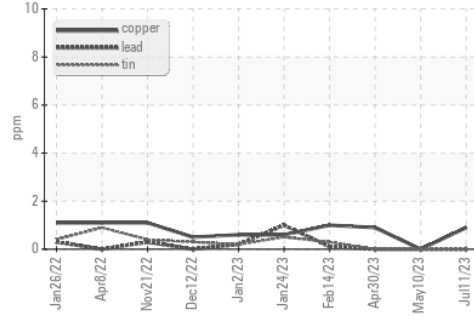

#### Viscosity @ 100°C

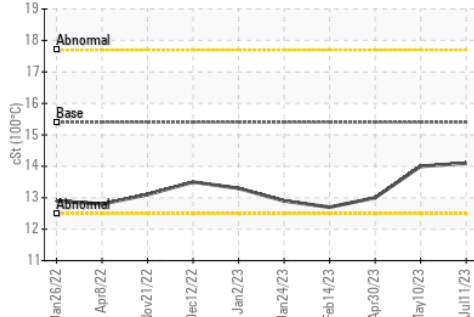

#### Base Number

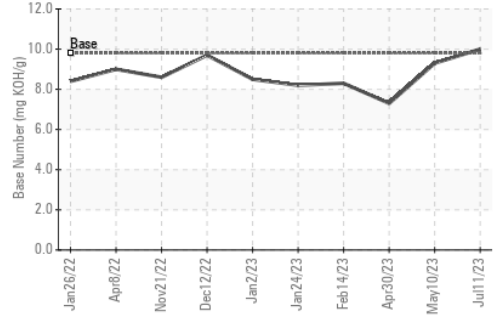

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0067725 **Received** : 21 Jul 2023  
**Lab Number** : 05904113 **Diagnosed** : 25 Jul 2023  
**Unique Number** : 10565469 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 820 - Joplin Hauling**  
 3700 West 7th Street  
 Joplin, MO  
 US 64801  
 Contact: James Jarrett  
 jjarrett@gflenv.com  
 T: (417)310-2802  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)