




# OIL ANALYSIS REPORT

Sample Rating Trend

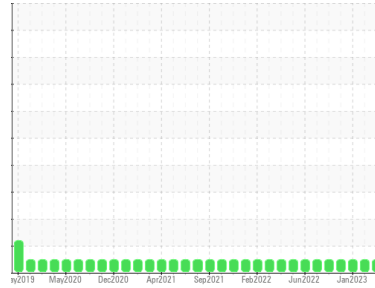

**NORMAL**



Machine Id  
**2844**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0087798</b>	GFL0073824	GFL0069252
Sample Date	Client Info	<b>17 Jul 2023</b>	03 Apr 2023	19 Jan 2023
Machine Age	hrs	<b>12705</b>	12185	11613
Oil Age	hrs	<b>520</b>	572	695
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >65	<b>9</b>	14	17
Chromium	ppm ASTM D5185m >5	<b>1</b>	2	3
Nickel	ppm ASTM D5185m >3	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >5	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >35	<b>11</b>	20	31
Lead	ppm ASTM D5185m >10	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >180	<b>&lt;1</b>	2	3
Tin	ppm ASTM D5185m >8	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>5</b>	10	9
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	66	66
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>901</b>	881	698
Calcium	ppm ASTM D5185m 1070	<b>1152</b>	1315	1377
Phosphorus	ppm ASTM D5185m 1150	<b>1025</b>	1088	1016
Zinc	ppm ASTM D5185m 1270	<b>1268</b>	1334	1252
Sulfur	ppm ASTM D5185m 2060	<b>3645</b>	3990	3845

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>2</b>	3	4
Sodium	ppm ASTM D5185m	<b>1</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>16</b>	27	47

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.5	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>7.0</b>	8.0	9.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.7</b>	19.3	19.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.3</b>	14.7	15.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.7</b>	8.6	7.8







# OIL ANALYSIS REPORT

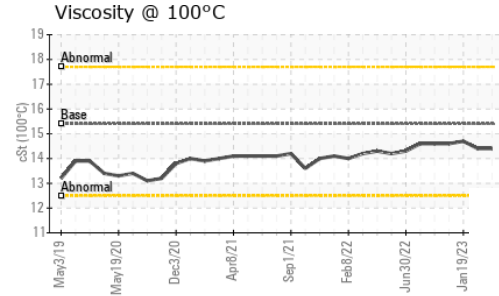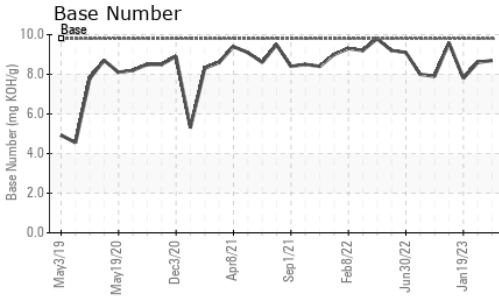

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.4	14.7

## GRAPHS

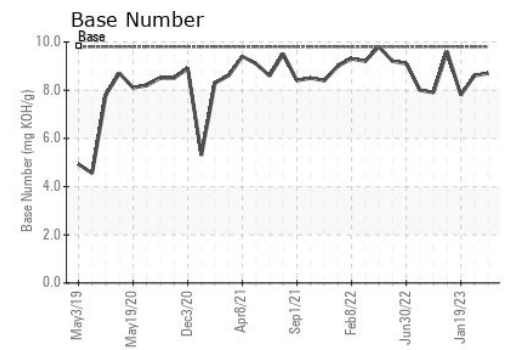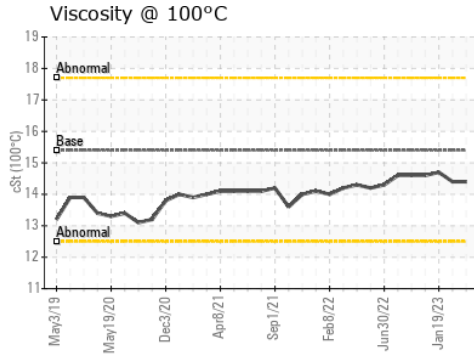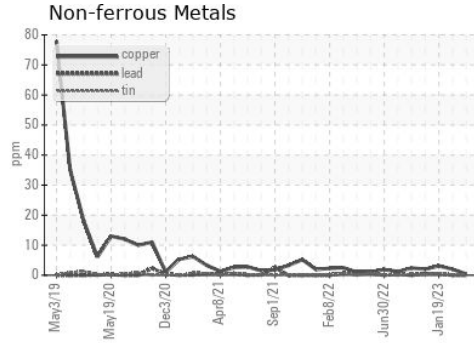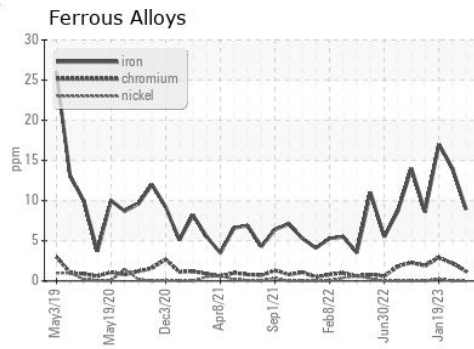

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087798 **Received** : 21 Jul 2023  
**Lab Number** : **05904227** **Diagnosed** : 21 Jul 2023  
**Unique Number** : 10565583 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 006 - Wilmington**  
 3618 US Highway 421 N  
 Wilmington, NC  
 US 28401  
 Contact: Eric Wood  
 eric.wood@gflenv.com  
 T: (717)723-1956  
 F: (910)762-6880

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)