




OIL ANALYSIS REPORT

Sample Rating Trend

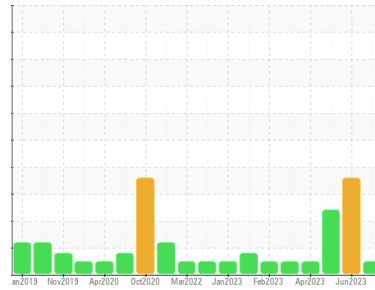

NORMAL



Machine Id
722021-310026

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0087196	GFL0083801	GFL0070161
Sample Date	Client Info		17 Jul 2023	19 Jun 2023	17 May 2023
Machine Age	hrs	Client Info	19265	19122	18947
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	9	68	26
Chromium	ppm	ASTM D5185m >4	<1	4	2
Nickel	ppm	ASTM D5185m >2	0	2	<1
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >25	1	4	2
Lead	ppm	ASTM D5185m >45	0	9	<1
Copper	ppm	ASTM D5185m >85	<1	19	3
Tin	ppm	ASTM D5185m >4	0	2	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	<1	<1
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	60	48	54
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	991	862	884
Calcium	ppm	ASTM D5185m 1070	1081	851	998
Phosphorus	ppm	ASTM D5185m 1150	1055	856	932
Zinc	ppm	ASTM D5185m 1270	1292	1098	1166
Sulfur	ppm	ASTM D5185m 2060	3712	2949	3041

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	6	9	6
Sodium	ppm	ASTM D5185m	11	19	16
Potassium	ppm	ASTM D5185m >20	2	7	3
Fuel	%	ASTM D3524 >5	1.2	19.3	10.3

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	4.7	1.4
Nitration	Abs/cm	*ASTM D7624 >20	7.0	17.4	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.0	35.4	22.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.4	35.6	19.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.7	0.0	7.8







OIL ANALYSIS REPORT

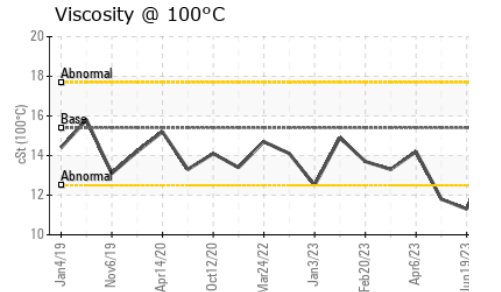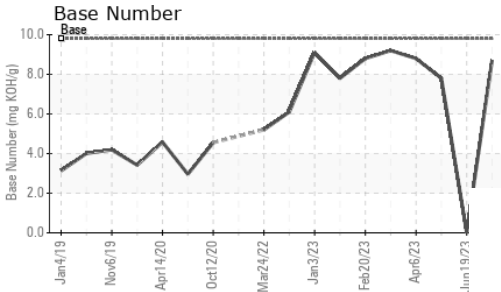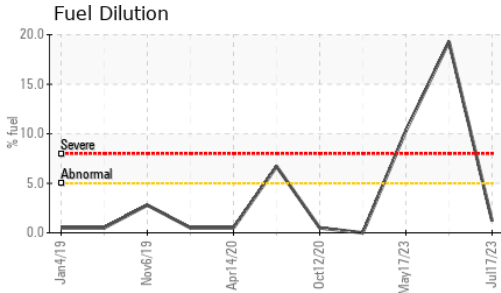

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	▲ 11.3 ▲ 11.8

GRAPHS

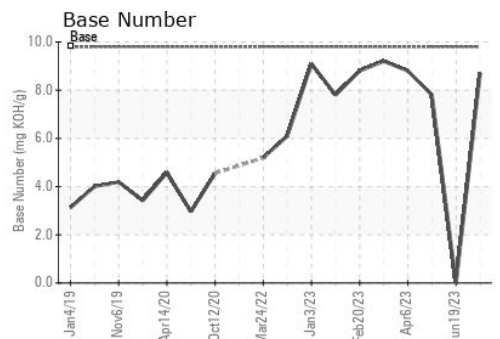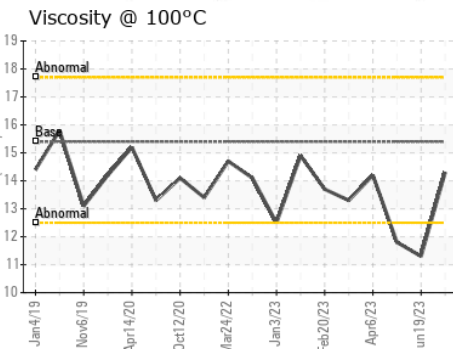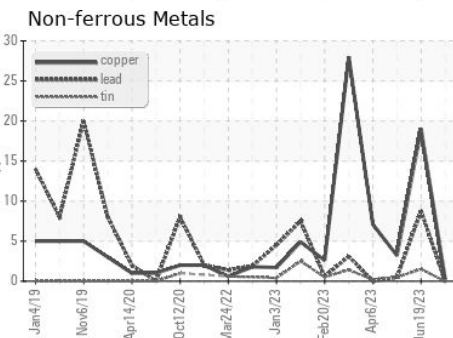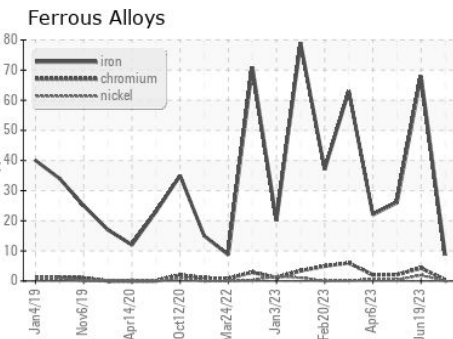

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087196 **Received** : 21 Jul 2023
Lab Number : 05904744 **Diagnosed** : 25 Jul 2023
Unique Number : 10566100 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Robert Hart
 rhart@gflenv.com
 T: (580)461-1509
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)