




# OIL ANALYSIS REPORT

Sample Rating Trend

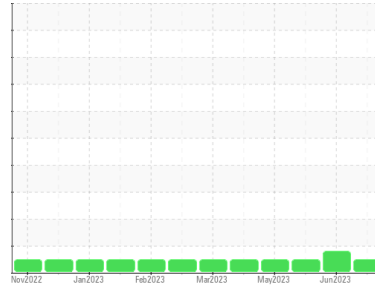

**NORMAL**



Machine Id  
**933021**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0087190</b>	GFL0083805	GFL0070166
Sample Date	Client Info	<b>18 Jul 2023</b>	14 Jun 2023	23 May 2023
Machine Age	hrs	<b>2369</b>	2201	2062
Oil Age	hrs	<b>1200</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Not Changd	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>6</b>	▲ 61	7
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	3	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	5	4
Lead	ppm	ASTM D5185m >30	<b>0</b>	2	3
Copper	ppm	ASTM D5185m >35	<b>2</b>	16	11
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	2	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>12</b>	13	33
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	2	0
Molybdenum	ppm	ASTM D5185m 50	<b>51</b>	51	59
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	7	1
Magnesium	ppm	ASTM D5185m 560	<b>585</b>	729	560
Calcium	ppm	ASTM D5185m 1510	<b>1641</b>	1334	1509
Phosphorus	ppm	ASTM D5185m 780	<b>727</b>	681	718
Zinc	ppm	ASTM D5185m 870	<b>958</b>	958	872
Sulfur	ppm	ASTM D5185m 2040	<b>2851</b>	2847	2389

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	<b>10</b>	43	11
Sodium	ppm	ASTM D5185m	<b>3</b>	6	5
Potassium	ppm	ASTM D5185m >20	<b>1</b>	12	<1

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	11.3	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	23.4	20.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.5</b>	19.2	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>5.2</b>	4.5	7.4







# OIL ANALYSIS REPORT

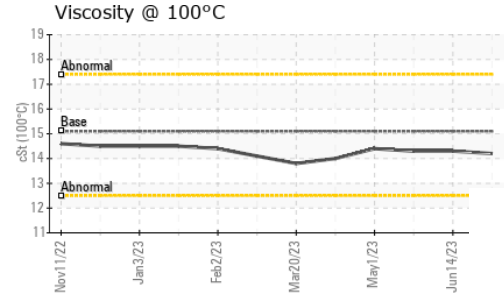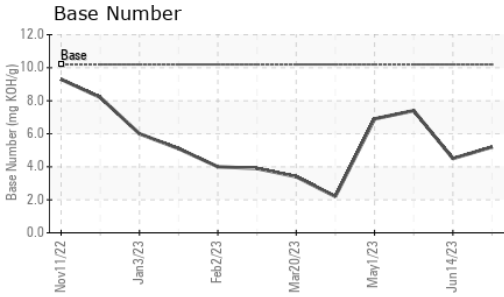

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.2</b>	14.3	14.3

## GRAPHS

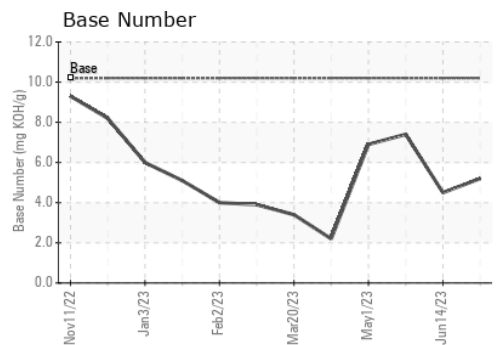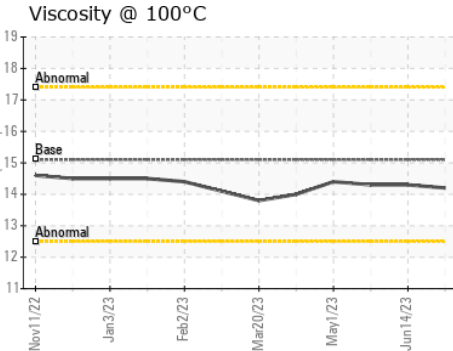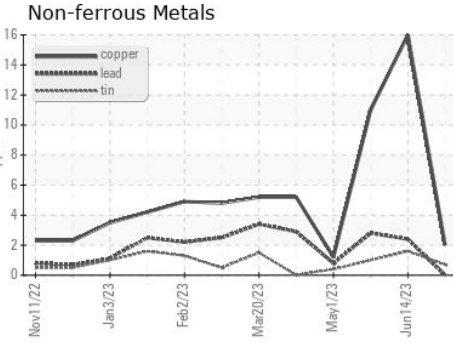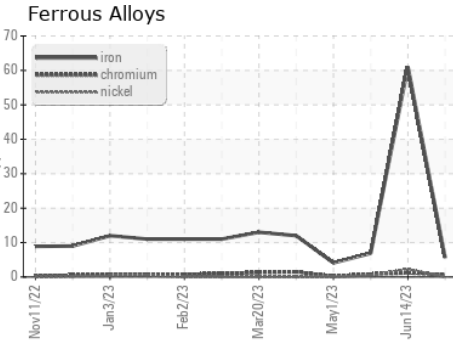

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087190 **Received** : 21 Jul 2023  
**Lab Number** : 05904746 **Diagnosed** : 24 Jul 2023  
**Unique Number** : 10566102 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)