

## **OIL ANALYSIS REPORT**

#### Sample Rating Trend



### Machine Id 425061-402314

#### Component Diesel Engine

Fluid PETRO CANADA DURON SHP 15W40 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

		AL)						
SAMPLE INFOF	RMATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		GFL0087171	GFL0070330	GFL0070339		
Sample Date		Client Info		13 Jul 2023	25 Apr 2023	17 Apr 2023		
Machine Age	hrs	Client Info		23960	23632	23556		
Oil Age	hrs	Client Info		0	600	300		
Oil Changed		Client Info		Not Changd	Changed	Not Changd		
Sample Status				NORMAL	NORMAL	NORMAL		
CONTAMINA	ΓΙΟΝ	method	limit/base	current	history1	history2		
Fuel		WC Method	>5	<1.0	<1.0	<1.0		
Glycol		WC Method		NEG	NEG	NEG		
WEAR METAI	_S	method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	38	58	55		
Chromium	ppm	ASTM D5185m	>20	2	2	2		
Nickel	ppm	ASTM D5185m	>4	0	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m	>3	0	0	0		
Aluminum	ppm	ASTM D5185m	>20	6	7	7		
Lead	ppm	ASTM D5185m	>40	0	0	0		
Copper	ppm	ASTM D5185m	>330	<1	1	0		
Tin	ppm	ASTM D5185m	>15	0	0	0		
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron			0	<1		0		
Doron	ppm	ASTM D5185m	0	<1	1	0		
	ppm	ASTM D5185m ASTM D5185m	0	<1	1 0	0		
Barium								
Barium Molybdenum	ppm	ASTM D5185m	0	<1	0 56 1	0		
Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m	0 60	<1 60	0 56	0 61		
Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0	<1 60 <1	0 56 1	0 61 1		
Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010	<1 60 <1 975	0 56 1 910	0 61 1 977		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070	<1 60 <1 975 1092	0 56 1 910 1004	0 61 1 977 1090		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150	<1 60 <1 975 1092 1058	0 56 1 910 1004 963	0 61 1 977 1090 1010		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270	<1 60 <1 975 1092 1058 1300	0 56 1 910 1004 963 1194	0 61 1 977 1090 1010 1301		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060	<1 60 <1 975 1092 1058 1300 3566	0 56 1 910 1004 963 1194 3203	0 61 1 977 1090 1010 1301 3173		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAI Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060	<1 60 <1 975 1092 1058 1300 3566 current	0 56 1 910 1004 963 1194 3203 history1	0 61 1 977 1090 1010 1301 3173 history2		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAI Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	0 60 0 1010 1070 1150 1270 2060	<1 60 <1 975 1092 1058 1300 3566 <u>current</u> 5	0 56 1 910 1004 963 1194 3203 history1 6	0 61 1 977 1090 1010 1301 3173 history2 6		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAI Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm <b>VTS</b>	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 limit/base >25	<1 60 <1 975 1092 1058 1300 3566 <u>current</u> 5 7	0 56 1 910 1004 963 1194 3203 history1 6 7	0 61 1 977 1090 1010 1301 3173 history2 6 6		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm <b>VTS</b>	ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 <b>limit/base</b> >25 >20	<1 60 <1 975 1092 1058 1300 3566 <u>current</u> 5 7 <1	0 56 1 910 1004 963 1194 3203 history1 6 7 0	0 61 1 977 1090 1010 1301 3173 history2 6 6 6 6 <1		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 <i>limit/base</i> >25 >20	<1 60 <1 975 1092 1058 1300 3566 <i>current</i> 5 7 <1 <i>current</i>	0 56 1 910 1004 963 1194 3203 history1 6 7 0 0 history1	0 61 1 977 1090 1010 1301 3173 history2 6 6 6 6 <1 +istory2		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm vtts	ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 <i>limit/base</i> >25 >20 <i>limit/base</i>	<1 60 <1 975 1092 1058 1300 3566 <i>current</i> 5 7 <1 <1 <i>current</i> 2.1	0 56 1 910 1004 963 1194 3203 history1 6 7 0 0 history1 2.9	0 61 1 977 1090 1010 1301 3173 history2 6 6 6 6 <1 history2 2.6		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm vTS ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624	0 60 0 1010 1070 1150 1270 2060 <b>imit/base</b> >25 >20 <b>imit/base</b> >20	<1 60 <1 975 1092 1058 1300 3566 current 5 7 <1 current 2.1 13.1	0 56 1 910 1004 963 1194 3203 history1 6 7 0 0 history1 2.9 14.6	0 61 1 977 1090 1010 1301 3173 history2 6 6 6 6 <1 <i>history2</i> 2.6 14.0		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm vTS ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624	0 60 0 1010 1070 1150 1270 2060 <i>limit/base</i> >25 >20 <i>limit/base</i> >3 >20 >30	<1 60 <1 975 1092 1058 1300 3566 Current 5 7 <1 Current 2.1 13.1 23.5	0 56 1 910 1004 963 1194 3203 history1 6 7 0 history1 2.9 14.6 27.3	0 61 1 977 1090 1010 1301 3173 history2 6 6 6 <1 * 1 * * * * * * * * * * * * * * * *		




# **OIL ANALYSIS REPORT**






120

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	13.0	13.1
GRAPHS						
Ferrous Alloys						

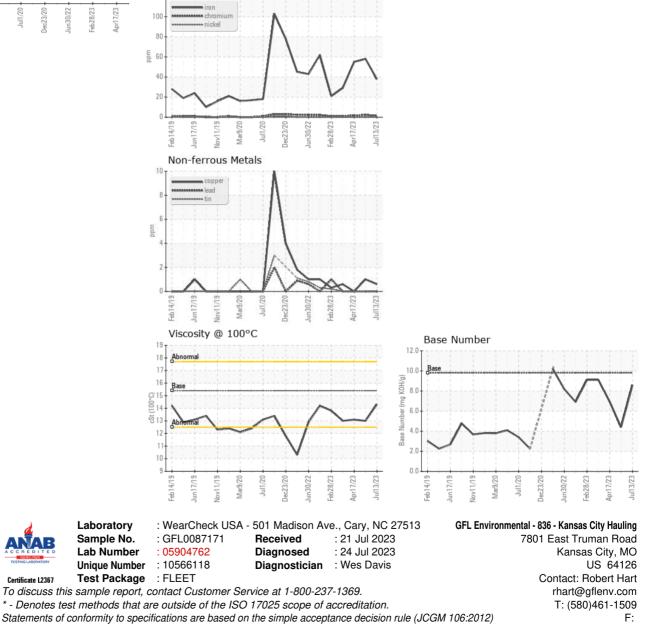



Contact/Location: See also GFL823, 834, 837, 840 - Robert Hart - GFL836