




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

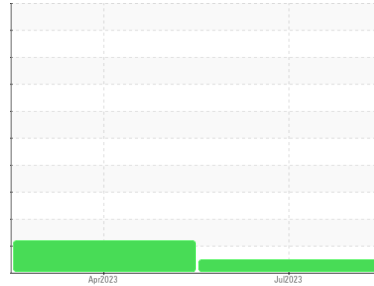

Machine Id
933021

Component
Transmission (Auto)

Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0087191	GFL0070347	---
Sample Date	Client Info	18 Jul 2023	12 Apr 2023	---
Machine Age	hrs	Client Info	2369	1778
Oil Age	hrs	Client Info	2369	1778
Oil Changed	Client Info	Not Chngd	Not Chngd	---
Sample Status		NORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	57	52
Chromium	ppm	ASTM D5185m >5	0	<1
Nickel	ppm	ASTM D5185m >5	<1	0
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m >5	<1	0
Aluminum	ppm	ASTM D5185m >50	33	26
Lead	ppm	ASTM D5185m >50	31	30
Copper	ppm	ASTM D5185m >225	12	8
Tin	ppm	ASTM D5185m >10	6	4
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	97	108
Barium	ppm	ASTM D5185m	<1	0
Molybdenum	ppm	ASTM D5185m	<1	<1
Manganese	ppm	ASTM D5185m	1	2
Magnesium	ppm	ASTM D5185m	0	7
Calcium	ppm	ASTM D5185m	83	114
Phosphorus	ppm	ASTM D5185m	281	293
Zinc	ppm	ASTM D5185m	2	13
Sulfur	ppm	ASTM D5185m	1669	1199

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	5	4
Sodium	ppm	ASTM D5185m	4	7
Potassium	ppm	ASTM D5185m >20	6	6

VISUAL


method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	▲ MODER
Yellow Metal	scalar	*Visual NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 34	35.0	35.0






OIL ANALYSIS REPORT

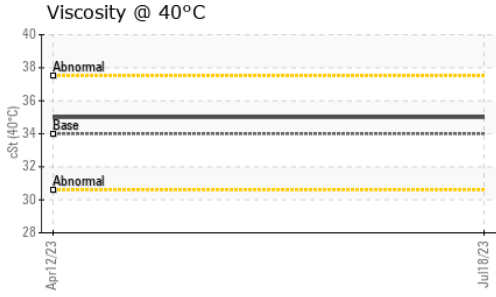

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

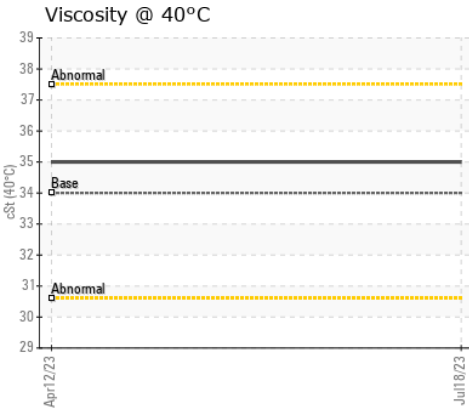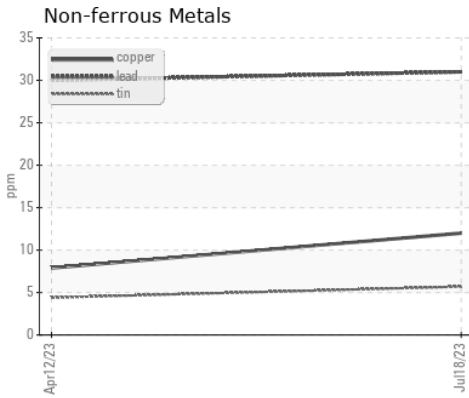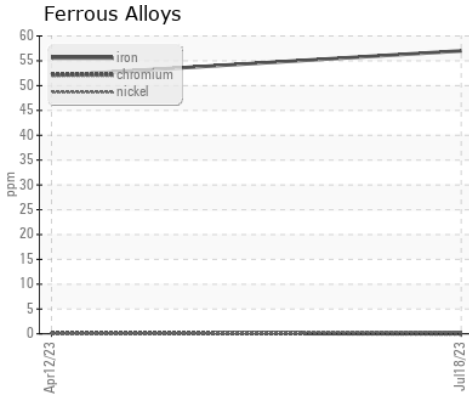

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087191
Lab Number : 05905064
Unique Number : 10566420
Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Robert Hart
 rhart@gflenv.com
 T: (580)461-1509
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)