


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

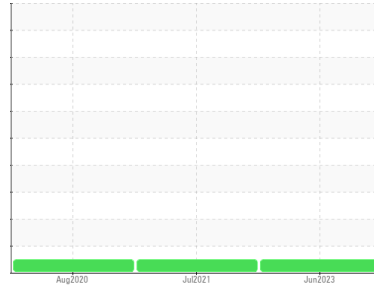

Area  
**Charlestown**  
Machine Id  
**637**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0078364</b>	PCA0023119	PCA0023019
Sample Date	Client Info			<b>28 Jun 2023</b>	07 Jul 2021	19 Aug 2020
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	327230	238163
Oil Changed	Client Info			<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>10</b>	10	9
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>5</b>	<1	1
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>30	<b>24</b>	4	5
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>4</b>	6	7
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Molybdenum	ppm	ASTM D5185m	50	<b>65</b>	68	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>1019</b>	1032	919
Calcium	ppm	ASTM D5185m	1050	<b>1158</b>	1194	1027
Phosphorus	ppm	ASTM D5185m	995	<b>1067</b>	1106	945
Zinc	ppm	ASTM D5185m	1180	<b>1341</b>	1243	1195
Sulfur	ppm	ASTM D5185m	2600	<b>3583</b>	2817	2346

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>4</b>	4	5
Sodium	ppm	ASTM D5185m		<b>16</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>19</b>	1	5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	9.6	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.6</b>	21.2	21

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.3</b>	17.1	17
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.48</b>	8.43	8.13









# OIL ANALYSIS REPORT

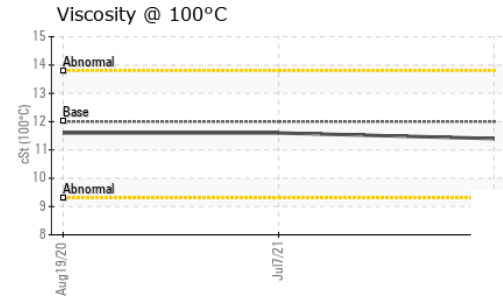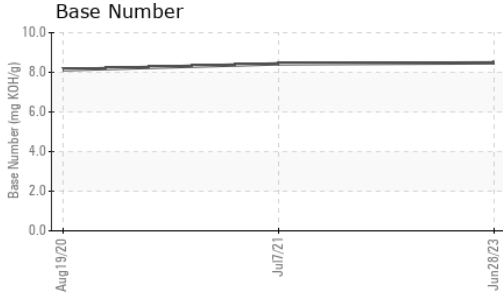

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.6

## GRAPHS

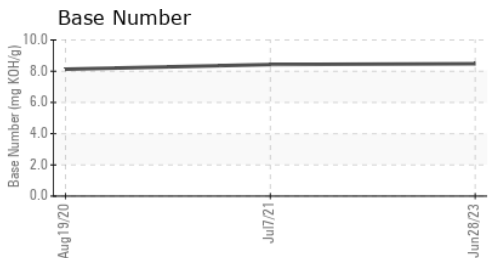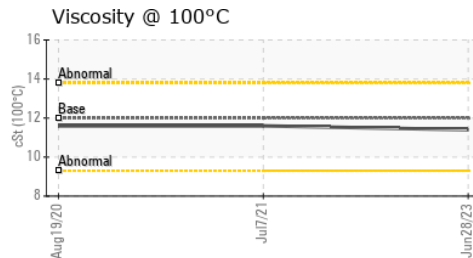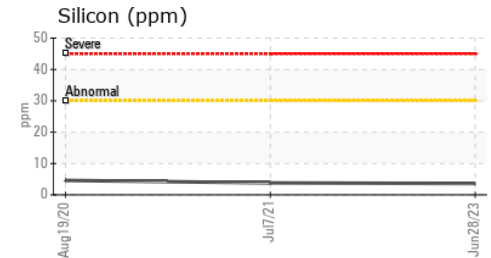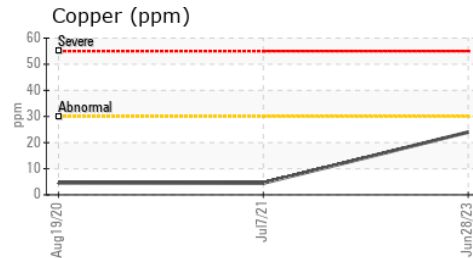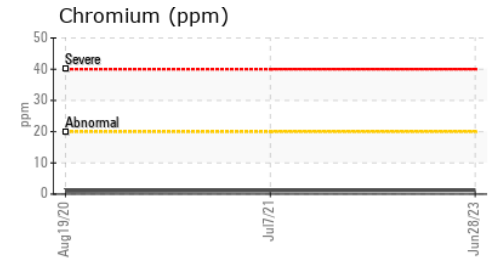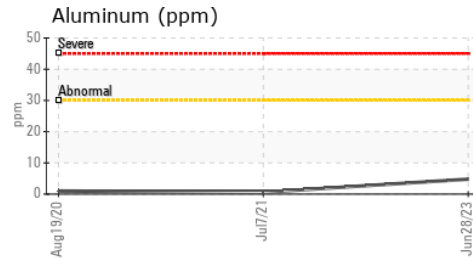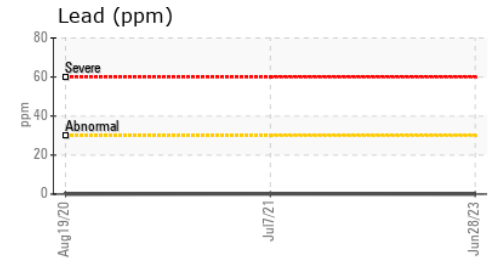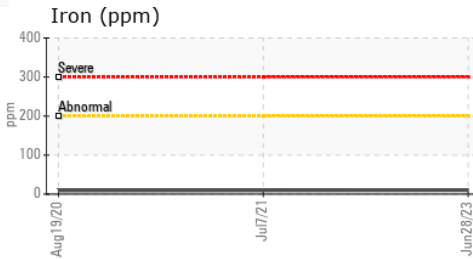

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0078364 **Received** : 24 Jul 2023  
**Lab Number** : 05905663 **Diagnosed** : 25 Jul 2023  
**Unique Number** : 10567019 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**PORTSIDE TRUCK AND AUTO - DIVERSIFIED AUTO**  
 100 TERMINAL ST  
 CHARLESTOWN, MA  
 US 02129  
 Contact: GLEN DAVIS  
 glenn.davis@diversifiedauto.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: