




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**425037-401386.1**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

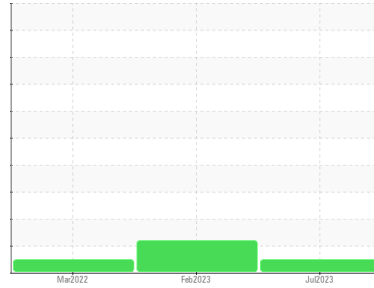

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0067736</b>	GFL0067768	GFL0036219
Sample Date	Client Info		<b>23 Jul 2023</b>	08 Feb 2023	28 Mar 2022
Machine Age	hrs	Client Info	<b>0</b>	0	31168
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	▲ 3.1	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>6</b>	11	20
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>16</b>	287	16
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	73	51
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>910</b>	350	800
Calcium	ppm	ASTM D5185m 1070	<b>1075</b>	1214	1248
Phosphorus	ppm	ASTM D5185m 1150	<b>991</b>	781	990
Zinc	ppm	ASTM D5185m 1270	<b>1201</b>	974	1153
Sulfur	ppm	ASTM D5185m 2060	<b>3525</b>	2860	2674

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	5	4
Sodium	ppm	ASTM D5185m	<b>1</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.9	1.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.8</b>	5.8	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>16.5</b>	18.9	21.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>11.8</b>	11.2	13.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	7.0	10







# OIL ANALYSIS REPORT

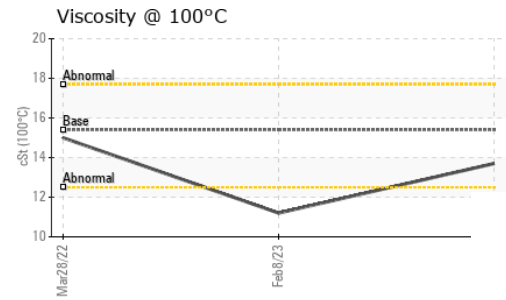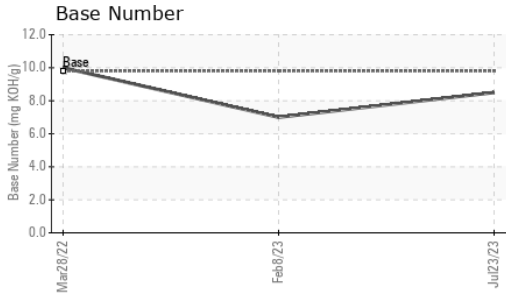

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	▲ 11.2	15.0

## GRAPHS

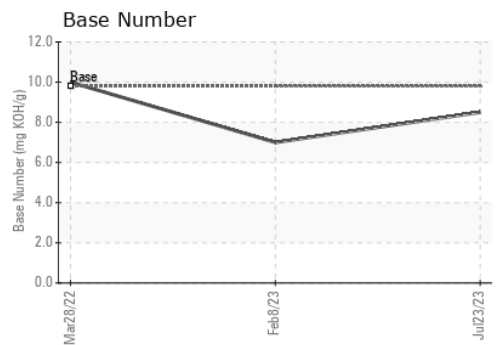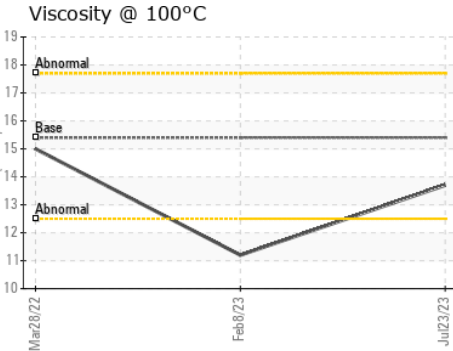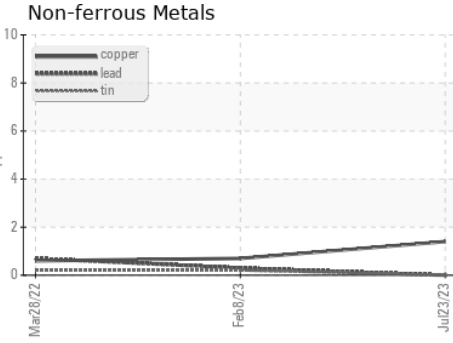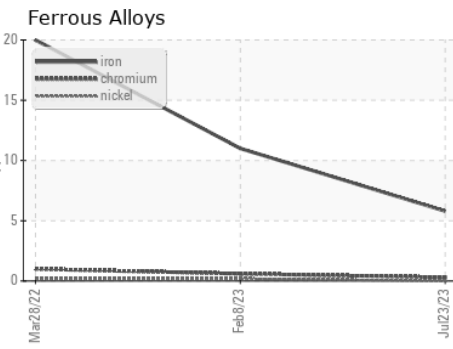

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0067736 **Received** : 08 Aug 2023  
**Lab Number** : **05918323** **Diagnosed** : 08 Aug 2023  
**Unique Number** : 10590237 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 820 - Joplin Hauling**  
 3700 West 7th Street  
 Joplin, MO  
 US 64801  
 Contact: James Jarrett  
 jjarrett@gflenv.com  
 T: (417)310-2802  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)