




PROBLEM SUMMARY

Sample Rating Trend


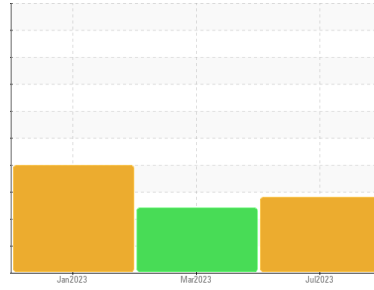


FUEL



Area
(54149Z)
 Machine Id
913030
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

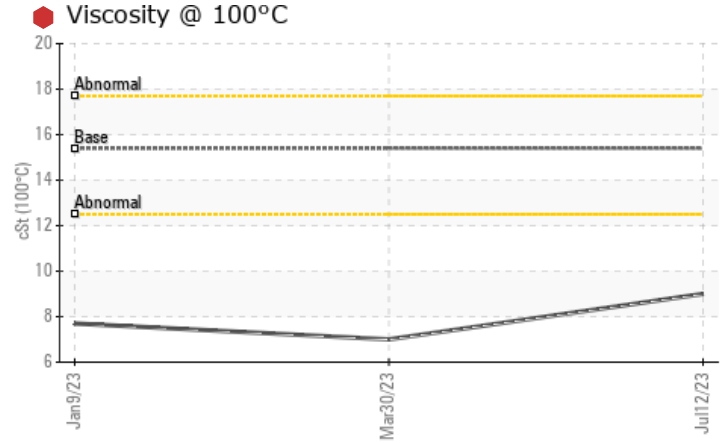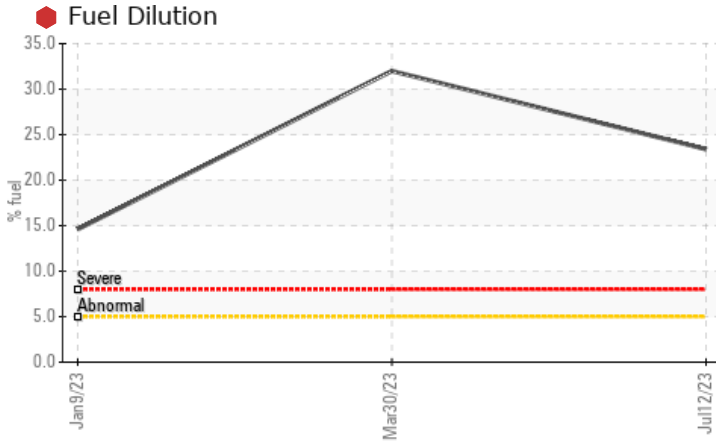

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

PROBLEMATIC TEST RESULTS

Sample Status	%	ASTM D3524	>5	SEVERE	SEVERE	SEVERE
Fuel				23.4	32.0	14.6
Visc @ 100°C	cSt	ASTM D445	15.4	9	7	7.7

Customer Id: GFL912
 Sample No.: GFL0072504
 Lab Number: 05918395
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	Please specify the component make and model with your next sample.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

30 Mar 2023 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



09 Jan 2023 Diag: Don Baldrige

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Elemental level of silicon (Si) above normal indicating ingress of seal material. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

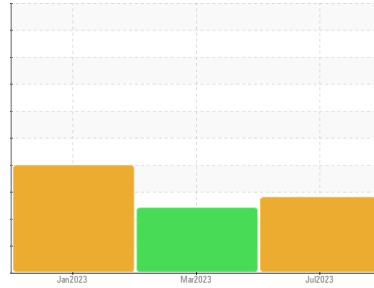

FUEL



Area
(54149Z)
Machine Id
913030

Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0072504	GFL0072486	GFL0055995
Sample Date	Client Info	12 Jul 2023	30 Mar 2023	09 Jan 2023
Machine Age	hrs	1940	1224	603
Oil Age	hrs	600	621	603
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	2	4	52
Chromium	ppm	ASTM D5185m >20	0	0	1
Nickel	ppm	ASTM D5185m >4	0	0	9
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	<1	5
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	0	6	123
Tin	ppm	ASTM D5185m >15	<1	0	5
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	81	2	149
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	57	38	100
Manganese	ppm	ASTM D5185m 0	<1	<1	5
Magnesium	ppm	ASTM D5185m 1010	654	583	550
Calcium	ppm	ASTM D5185m 1070	1116	709	1200
Phosphorus	ppm	ASTM D5185m 1150	768	613	546
Zinc	ppm	ASTM D5185m 1270	947	738	679
Sulfur	ppm	ASTM D5185m 2060	3071	1920	1750

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	3	3	▲ 79
Sodium	ppm	ASTM D5185m	0	<1	<1
Potassium	ppm	ASTM D5185m >20	0	0	11
Fuel	%	ASTM D3524 >5	● 23.4	● 32.0	● 14.6

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.2	0.2	0.8
Nitration	Abs/cm	*ASTM D7624 >20	6.4	7.5	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.8	17.7	22.6

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.4	13.1	18.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.7	6.0	7.2







OIL ANALYSIS REPORT

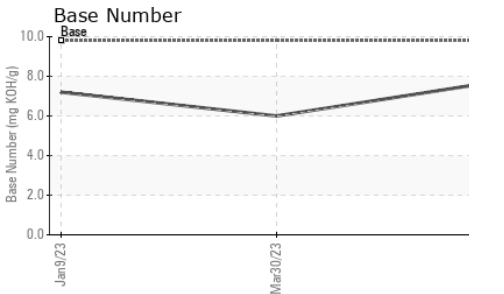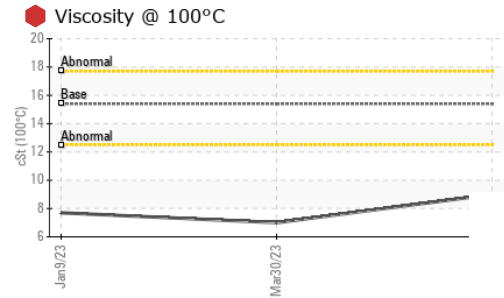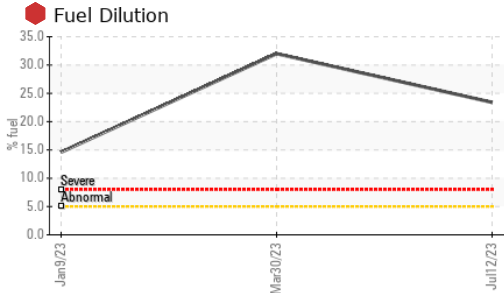

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	9	7

GRAPHS

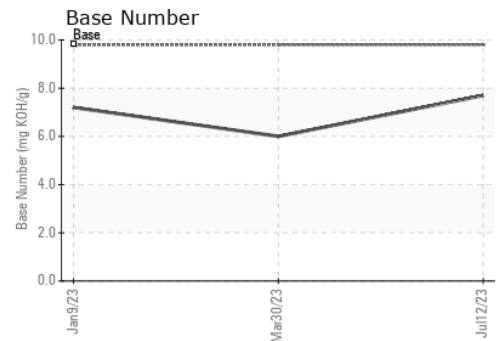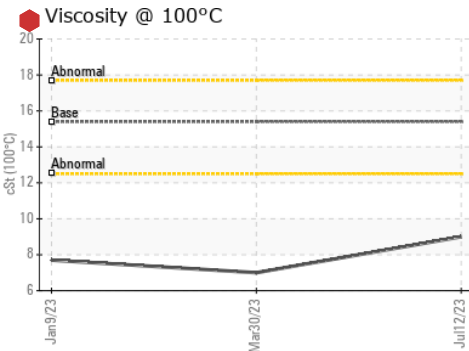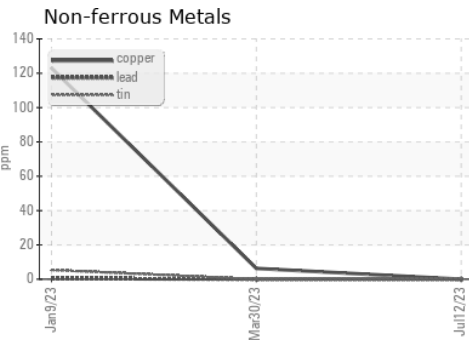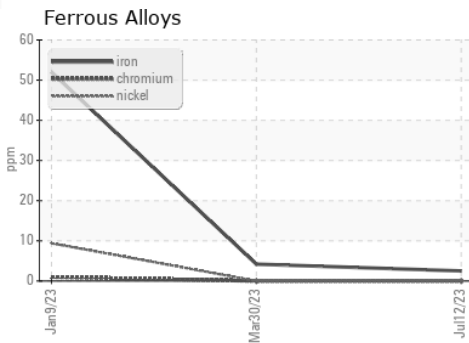

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0072504 **Received** : 08 Aug 2023
Lab Number : 05918395 **Diagnosed** : 09 Aug 2023
Unique Number : 10590309 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 912 - Fort Atkinson HC
 1215 Klement St.
 Fort Atkinson, WI
 US 53538
 Contact: LEONARD KOZLEUCHAR
 leonard.kozleuchar@gflenv.com
 T: (262)210-6528
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)