




# OIL ANALYSIS REPORT

## Sample Rating Trend

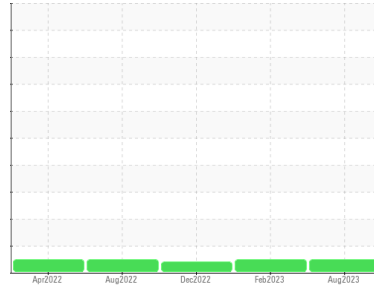

**NORMAL**



Machine Id  
**723006-528**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0064477</b>	GFL0060753	GFL0060770
Sample Date	Client Info	<b>01 Aug 2023</b>	06 Feb 2023	20 Dec 2022
Machine Age	hrs	<b>35513</b>	34999	34913
Oil Age	hrs	<b>514</b>	412	326
Oil Changed	Client Info	<b>Changed</b>	Changed	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	ATTENTION

### CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>58</b>	57	30
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>1</b>	<1	1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	1	2
Lead	ppm	ASTM D5185m >40	<b>2</b>	1	2
Copper	ppm	ASTM D5185m >330	<b>2</b>	1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>17</b>	7	9
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>67</b>	65	60
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>989</b>	897	913
Calcium	ppm	ASTM D5185m	<b>1237</b>	1113	1104
Phosphorus	ppm	ASTM D5185m 760	<b>1029</b>	1013	969
Zinc	ppm	ASTM D5185m 830	<b>1223</b>	1198	1222
Sulfur	ppm	ASTM D5185m 2770	<b>3646</b>	2981	3394

### CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>6</b>	7	5
Sodium	ppm	ASTM D5185m	<b>3</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	1	0
Fuel	%	ASTM D3524 >2.0	<b>&lt;1.0</b>	<1.0	0.7

### INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.4</b>	6.2	6.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	18.8	18.9

### FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.4</b>	14.2	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>8.3</b>	8.8	9.3







# OIL ANALYSIS REPORT

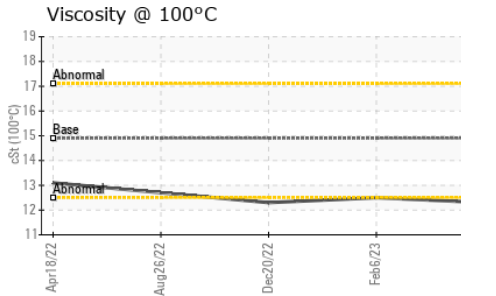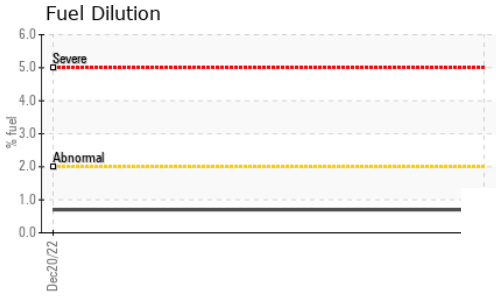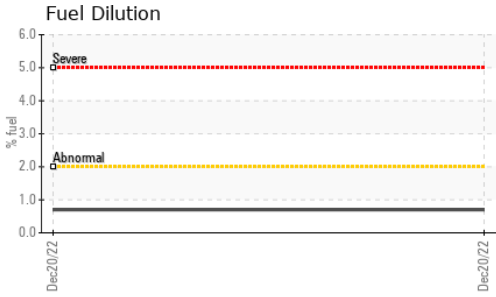

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	12.3	12.5 ▲ 12.3

## GRAPHS

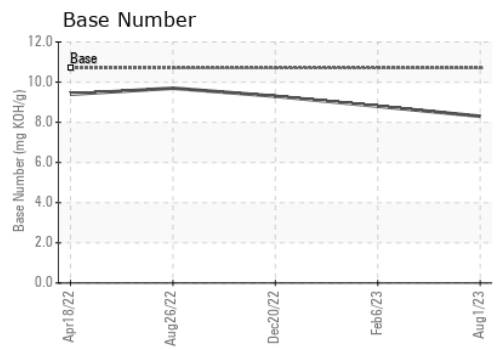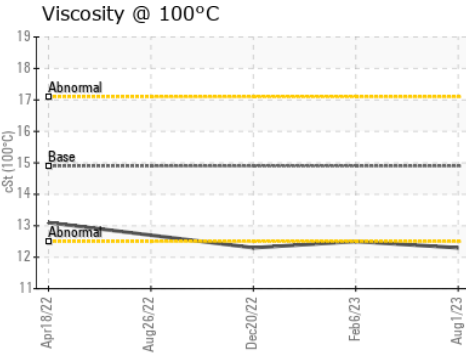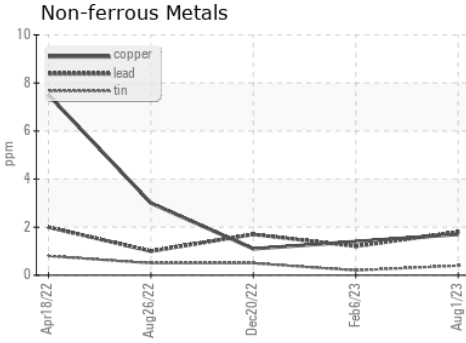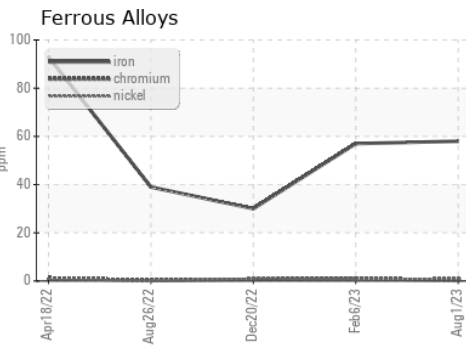

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0064477 **Received** : 08 Aug 2023  
**Lab Number** : 05919134 **Diagnosed** : 09 Aug 2023  
**Unique Number** : 10591048 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution )

**GFL Environmental - 624 - Elmira Hauling**  
 10164 M-32  
 Elmira, MI  
 US 49730  
 Contact: ANDY GROBASKI  
 andygro@americanwaste.org  
 T: (989)370-2941  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)