


PROBLEM SUMMARY

Area **PLANT** 1 [906948195] Machine Id **RC-8 PLANT** 1 (S/N 2552354) Component

Refrigeration Compressor

PETRO CANADA REFLO XL SYNTHETIC BLEND (110 GAL)

COMPONENT CONDITION SUMMARY

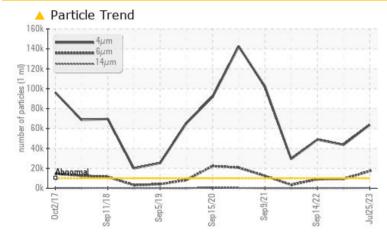

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL			
Particles >4µm		ASTM D7647	>10000	<u> </u>	4 3650	4 8853			
Particles >6µm		ASTM D7647	>2500	🔺 17217	4 9345	9079			
Particles >14µm		ASTM D7647	>320	<u> </u>	153	117			
Oil Cleanliness		ISO 4406 (c)	>20/18/15	A 23/21/16	🔺 23/20/14	🔺 23/20/14			
Debris	scalar	*Visual	NONE	A MODER	VLITE	LIGHT			


Customer Id: MCCEASPCA Sample No.: PCA0079289 Lab Number: 05919339 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

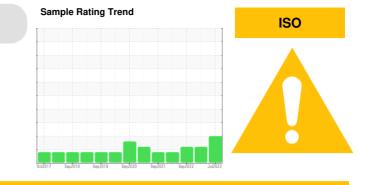

RECOMMENDED	COMMENDED ACTIONS						
Action	Status	Date	Done By	Description			
Change Filter			?	We recommend you service the filters on this component if applicable.			

HISTORICAL DIAGNOSIS



09 Feb 2023 Diag: Don Baldridge

No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

14 Sep 2022 Diag: Don Baldridge



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

01 Mar 2022 Diag: Don Baldridge

No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







Wear


the oil

OIL ANALYSIS REPORT

PLANT 1 [906948195] RC-8 PLANT 1 (S/N 2552354) Component

Refrigeration Compressor

PETRO CANADA REFLO XL SYNTHETIC BLEND (110 GAL)

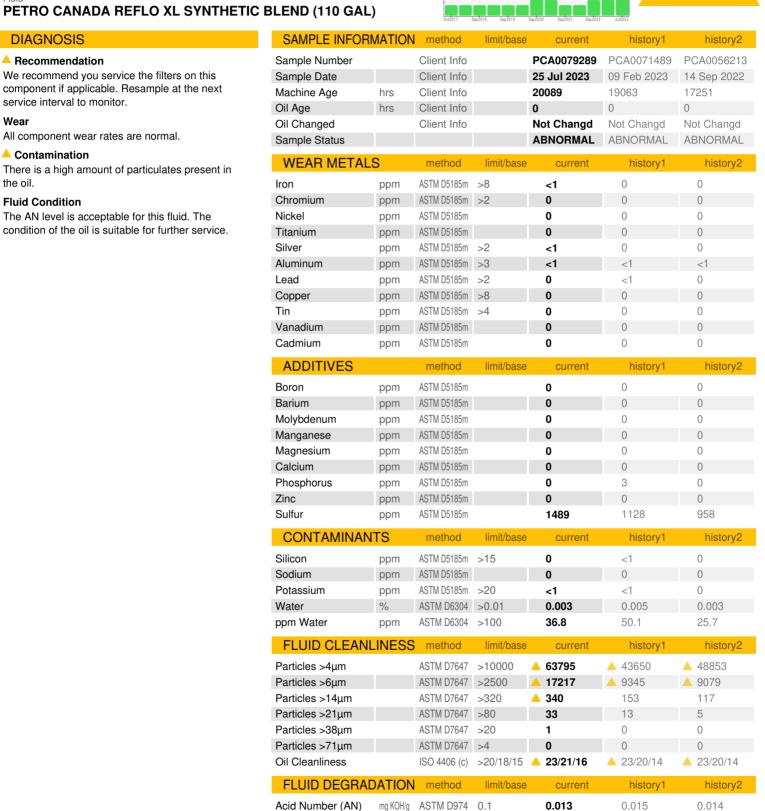



Sample Rating Trend


ISO



OIL ANALYSIS REPORT

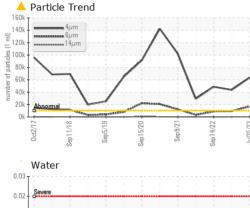


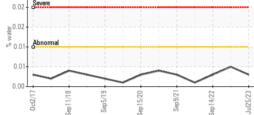

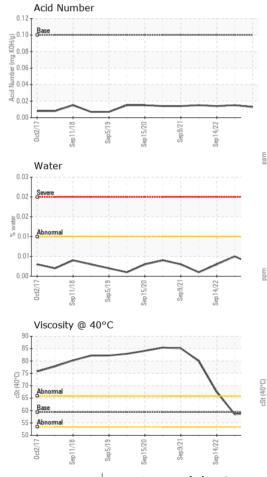

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE		VLITE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	59.3	59.2	58.5	67.5
SAMPLE IMAG	ES	method	limit/base	current	history1	history2
Color						

Bottom

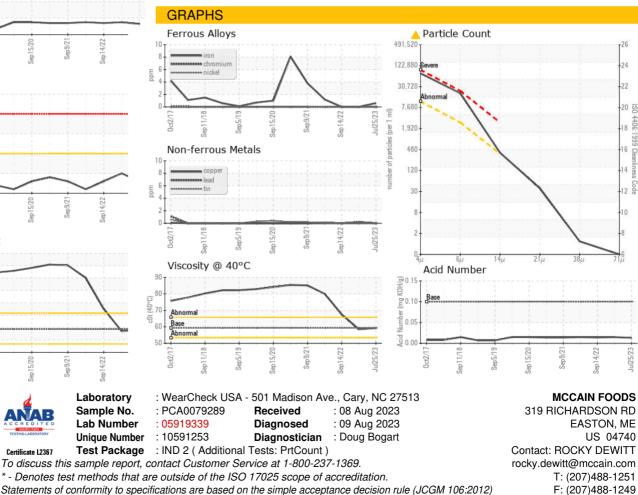

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ROCKY DEWITT - MCCEASPCA