

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC	; TEST RESULT	S			
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>10000	<u> </u>	A 98109	A 75337
Particles >6µm	ASTM D7647	>2500	🔺 12518	1 5022	5 781
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<u> </u>	4 /21/13	A 23/20/11

Customer Id: MCCEASPCA Sample No.: PCA0068402 Lab Number: 05919341 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Feb 2023 Diag: Don Baldridge



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



14 Sep 2022 Diag: Don Baldridge

01 Mar 2022 Diag: Don Baldridge

No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

<u>ه ه گ گ ه ه ک ا</u>

ISO

Area **PLANT** 1 [906942400] Machine Id **RC-7 PLANT** 1 (S/N 1877358D) Component

Refrigeration Compressor

IRVING STAR C 4G ISO 68 (125 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0068402	PCA0046393	PCA0056216
Sample Date		Client Info		25 Jul 2023	13 Feb 2023	14 Sep 2022
Machine Age	hrs	Client Info		133184	132607	132522
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	9	12	10
Chromium	ppm	ASTM D5185m		0	0	0
Nickel		ASTM D5185m	22	0	0	0
	ppm	ASTM D5185m		0	0	0
Titanium	ppm		0	-		
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m		0	<1	<1
Lead	ppm	ASTM D5185m	>2	0	<1	0
Copper	ppm	ASTM D5185m		<1	<1	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	3	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		321	303	314
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	2	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.01	0.003	0.005	0.003
ppm Water	ppm	ASTM D6304	>100	33.0	51.7	36.3
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>	4 98109	▲ 75337
Particles >6µm		ASTM D7647	>2500	<u> </u>	▲ 15022	5 781
Particles >14µm		ASTM D7647	>320	41	45	15
		ASTM D7647	>80	2	3	1
Particles >21µm		ASTM D7647	>20	1	0	0
•		ASTIVI D7047				
Particles >21µm		ASTM D7647 ASTM D7647		0	0	0
Particles >21µm Particles >38µm				0 2 3/21/13	0	0
Particles >21µm Particles >38µm Particles >71µm	DATION	ASTM D7647 ISO 4406 (c)	>4			





Acid Number


0.03


0.03

OIL ANALYSIS REPORT

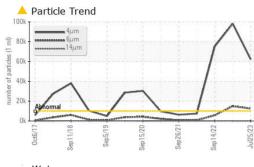


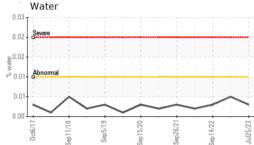

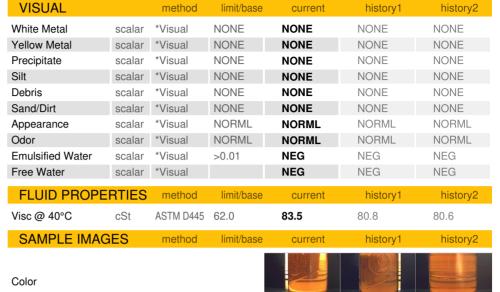



Bottom

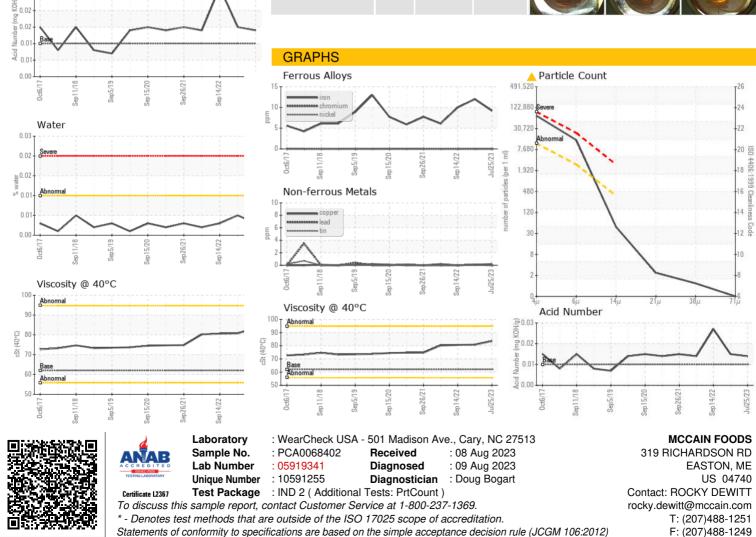

Contact/Location: ROCKY DEWITT - MCCEASPCA