


PROBLEM SUMMARY


PLANT 1 [906942398] RC-5 PLANT 1 (S/N MK5-128)

Refrigeration Compressor

PETRO CANADA REFLO XL SYNTHETIC BLEND (165 GAL)

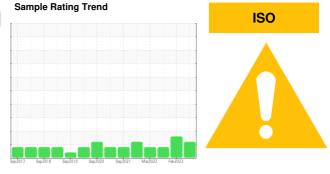

COMPONENT CONDITION SUMMARY

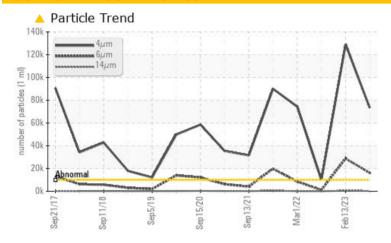

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC	TEST RESULT	S			
Sample Status			ABNORMAL	ABNORMAL	ATTENTION
Particles >4µm	ASTM D7647	>10000	73361	<u>129124</u>	<u>▲</u> 10113
Particles >6µm	ASTM D7647	>2500	16167	28747	1077
Oil Cleanliness	ISO 4406 (c)	>20/18/15	23/21/15	<u>4</u> 24/22/16	<u>^</u> 21/17/11

Customer Id: MCCEASPCA Sample No.: PCA0068400 Lab Number: 05919343 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Feb 2023 Diag: Don Baldridge

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



14 Sep 2022 Diag: Don Baldridge

150



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



01 Mar 2022 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






OIL ANALYSIS REPORT

PLANT 1 [906942398] Machine Id RC-5 PLANT 1 (S/N MK5-128)

Component

Refrigeration Compressor

PETRO CANADA REFLO XL SYNTHETIC BLEND (165 GAL)

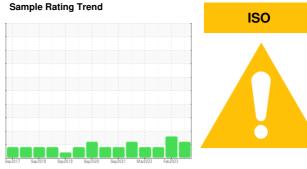

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

LEND (165 GAL	.)	Sep 2017 S	ep2018 Sep2019 Sep	2020 Sep2021 Mar2022	Feb 2023	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0068400	PCA0071498	PCA0056217
Sample Date		Client Info		25 Jul 2023	13 Feb 2023	14 Sep 2022
Machine Age	hrs	Client Info		48704	45117	42059
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	7	12	3
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>3	0	<1	<1
Lead	ppm	ASTM D5185m	>2	0	<1	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	2	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		1268	985	1153
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.01	0.002	0.003	0.002
ppm Water	ppm	ASTM D6304	>100	24.8	25.7	16.7
FLUID CLEAN	LINESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	<u> </u>	<u>129124</u>	<u></u> 10113
Particles >6µm		ASTM D7647	>2500	<u> </u>	<u>▲</u> 28747	1077
Particles >14μm		ASTM D7647	>320	267	△ 509	15
Particles >21μm		ASTM D7647		20	42	1
Particles >38μm		ASTM D7647	>20	0	1	0
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>^</u> 23/21/15	<u>4</u> 24/22/16	<u>\(21/17/11</u>
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.1	0.014	0.015	0.014



OIL ANALYSIS REPORT

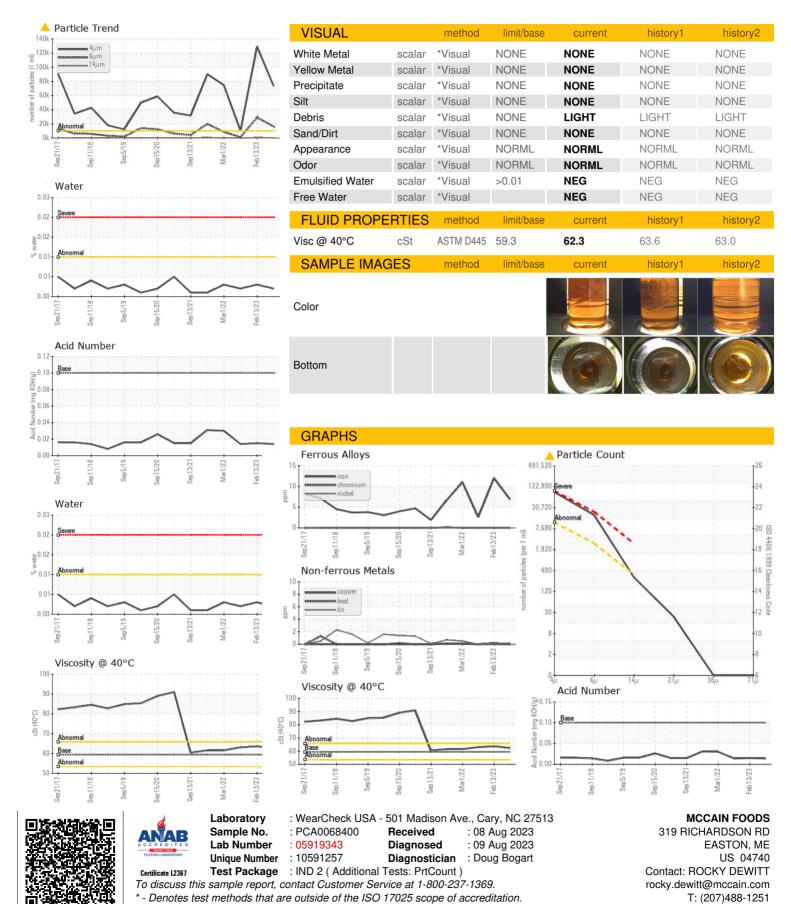

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (207)488-1249