


# **PROBLEM SUMMARY**

### Area **PLANT** 1 [906948197] Machine Id **RC-10 PLANT** 1 (S/N V1991) Component

Refrigeration Compressor Fluid FES 1 (50 GAL)

# COMPONENT CONDITION SUMMARY

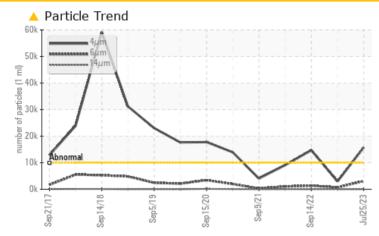

# RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status		ATTENTION	NORMAL	ATTENTION			
Particles >4µm	ASTM D7647 >100	00 🔺 15749	2965	<b>1</b> 4710			
Particles >6µm	ASTM D7647 >250	0 🔺 3090	718	1351			
Oil Cleanliness	ISO 4406 (c) >20/1	18/15 🔺 <b>21/19/12</b>	19/17/12	<u> </u>			


Customer Id: MCCEASPCA Sample No.: PCA0079287 Lab Number: 05919353 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

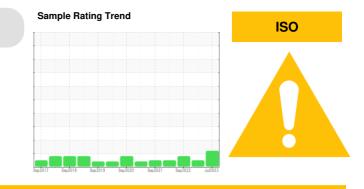

# **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

# **HISTORICAL DIAGNOSIS**

### 13 Feb 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 14 Sep 2022 Diag: Doug Bogart

01 Mar 2022 Diag: Don Baldridge



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of silt (particulates < 6 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

#### NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

Sample Rating Trend

# ISO

Component **Refrigeration Compressor** Fluid FES 1 (50 GAL)

PLANT 1 [906948197]

RC-10 PLANT 1 (S/N V1991)

# DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

# Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0079287	PCA0046391	PCA0056210
Sample Date		Client Info		25 Jul 2023	13 Feb 2023	14 Sep 2022
Machine Age	hrs	Client Info		1069	1066	742
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ATTENTION	NORMAL	ATTENTION
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	12	11	9
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>3	0	<1	<1
Lead	ppm	ASTM D5185m	>2	<1	<1	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	2	0
Zinc	ppm	ASTM D5185m		5	1	<1
Sulfur	ppm	ASTM D5185m		4	23	7
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	3	2
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304		0.003	0.001	0.002
ppm Water	ppm	ASTM D6304	>100	29.2	14.3	17.7
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	🔺 15749	2965	🔺 14710
Particles >6µm		ASTM D7647	>2500	<u> </u>	718	1351
Particles >14µm		ASTM D7647	>320	29	28	7
Particles >21µm		ASTM D7647	>80	4	4	2
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>A</b> 21/19/12	19/17/12	<b>2</b> 1/18/10
FLUID DEGRAD	OATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974		0.014	0.016	0.028




Acid Number


0.03

0.03

# **OIL ANALYSIS REPORT**

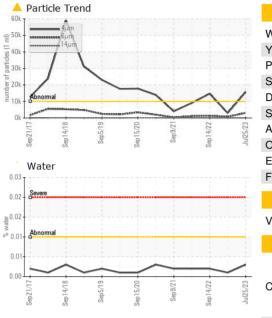

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		73.9	73.9	73.5
SAMPLE IMAG	ES	method	limit/base	current	history1	history2
Color				122		



Bottom

