




# PROBLEM SUMMARY

## Sample Rating Trend

GLYCOL




Machine Id  
**1963**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

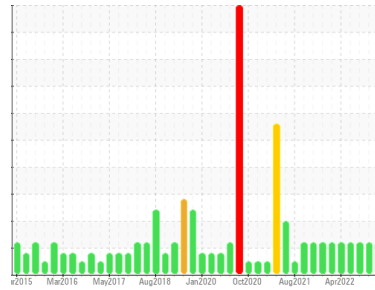

## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

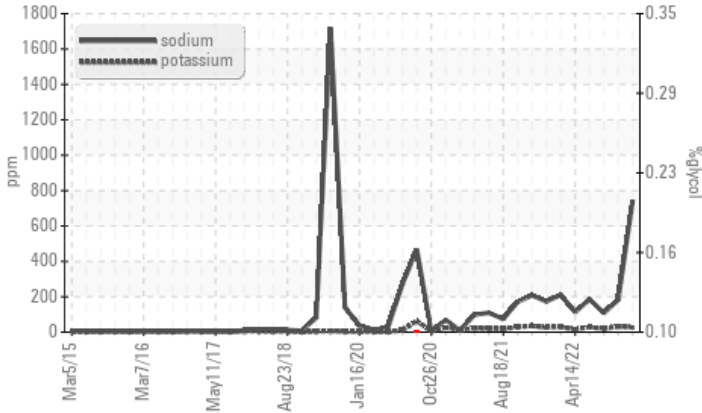

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ATTENTION	ATTENTION
Sodium	ppm	ASTM D5185m	▲ 742	▲ 183	▲ 108

Customer Id: GFL415  
 Sample No.: GFL0086666  
 Lab Number: 05919631  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS

### 20 Feb 2023 Diag: Don Baldrige

#### GLYCOL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

[view report](#)



### 31 Oct 2022 Diag: Don Baldrige

#### GLYCOL



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### 17 Aug 2022 Diag: Don Baldrige

#### GLYCOL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend

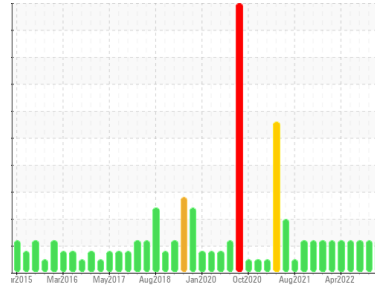

GLYCOL



Machine Id  
**1963**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0086666</b>	GFL0069238	GFL0059670
Sample Date	Client Info	<b>07 Aug 2023</b>	20 Feb 2023	31 Oct 2022
Machine Age	hrs	<b>26501</b>	26130	26012
Oil Age	hrs	<b>0</b>	650	315
Oil Changed	Client Info	<b>Changed</b>	Changed	Not Changd
Sample Status		<b>ABNORMAL</b>	ATTENTION	ATTENTION

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>49</b>	27	14
Chromium	ppm ASTM D5185m >20	<b>3</b>	1	<1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>6</b>	4	3
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>20</b>	23	36
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>88</b>	85	77
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>900</b>	454	472
Calcium	ppm ASTM D5185m 1070	<b>1051</b>	1627	1668
Phosphorus	ppm ASTM D5185m 1150	<b>969</b>	1016	1031
Zinc	ppm ASTM D5185m 1270	<b>1206</b>	1231	1238
Sulfur	ppm ASTM D5185m 2060	<b>3448</b>	3432	4103

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>15</b>	6	4
Sodium	ppm ASTM D5185m	<b>▲ 742</b>	▲ 183	▲ 108
Potassium	ppm ASTM D5185m >20	<b>26</b>	32	18
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>3.4</b>	1.6	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>13.6</b>	10.5	8.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>25.7</b>	21.9	20.4


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.7</b>	15.2	14.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.6</b>	8.3	9.4




# OIL ANALYSIS REPORT


Glycol Contamination

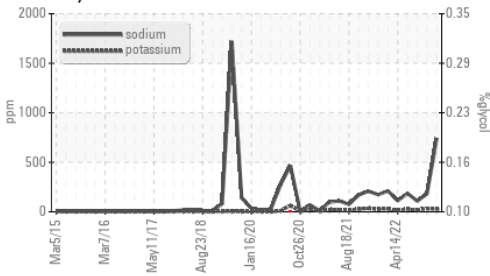

Viscosity @ 100°C

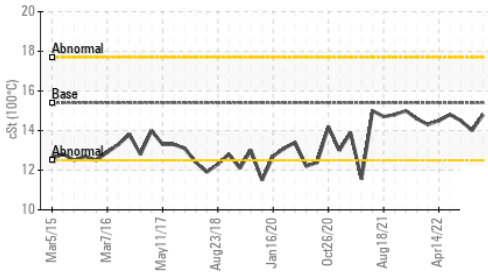

Glycol Contamination

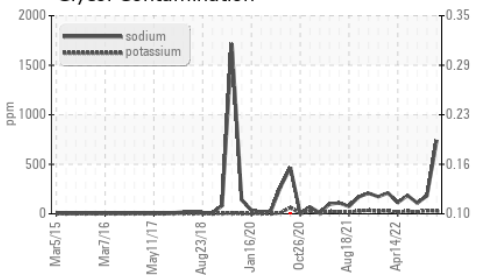


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.8</b>	14.0

## GRAPHS


Ferrous Alloys

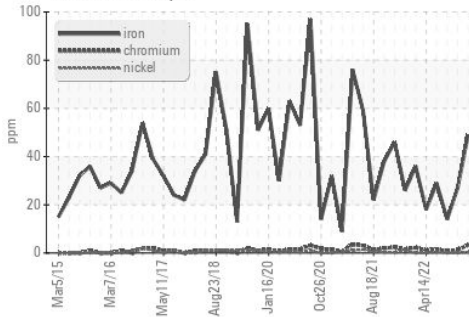


Non-ferrous Metals

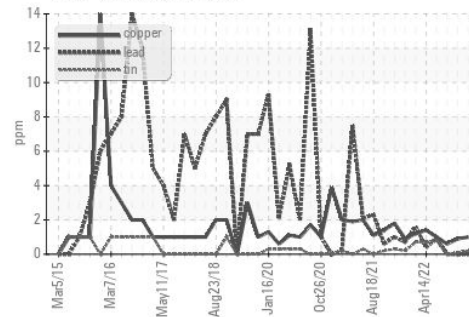

Viscosity @ 100°C

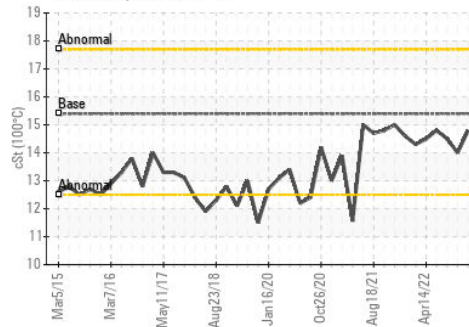

Base Number

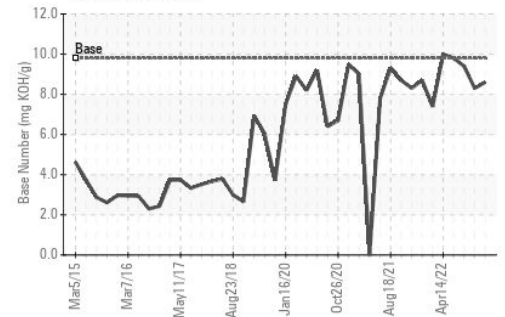

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086666 **Received** : 09 Aug 2023  
**Lab Number** : 05919631 **Diagnosed** : 10 Aug 2023  
**Unique Number** : 10591545 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)