




OIL ANALYSIS REPORT

Sample Rating Trend

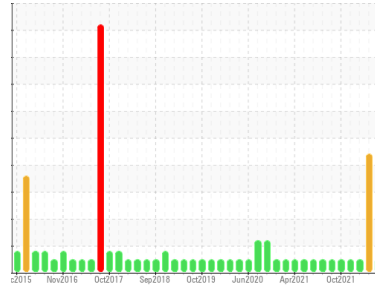

NORMAL



Machine Id
3537

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0073306	GFL0045913	GFL0049235
Sample Date	Client Info	07 Aug 2023	23 Nov 2022	01 Apr 2022
Machine Age	hrs	600	600	30177
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	33	15	41
Chromium	ppm	ASTM D5185m >20	1	<1	2
Nickel	ppm	ASTM D5185m >4	0	<1	<1
Titanium	ppm	ASTM D5185m	9	<1	<1
Silver	ppm	ASTM D5185m >3	<1	<1	<1
Aluminum	ppm	ASTM D5185m >20	<1	4	11
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >330	10	2	5
Tin	ppm	ASTM D5185m >15	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	20	57	28
Barium	ppm	ASTM D5185m 0	2	0	0
Molybdenum	ppm	ASTM D5185m 60	78	59	68
Manganese	ppm	ASTM D5185m 0	3	<1	<1
Magnesium	ppm	ASTM D5185m 1010	871	706	1041
Calcium	ppm	ASTM D5185m 1070	1187	1035	1219
Phosphorus	ppm	ASTM D5185m 1150	960	698	1144
Zinc	ppm	ASTM D5185m 1270	1183	980	1307
Sulfur	ppm	ASTM D5185m 2060	3635	2800	2979

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	19	14	21
Sodium	ppm	ASTM D5185m	3	62	78
Potassium	ppm	ASTM D5185m >20	2	<1	2
Fuel	%	ASTM D3524 >5	0.6	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.3	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	7.5	17.9	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	16.9	7.0	19.4

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	12.4	22.0	15.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.7	34.8	12.3







OIL ANALYSIS REPORT

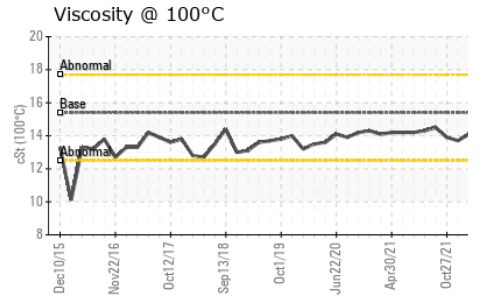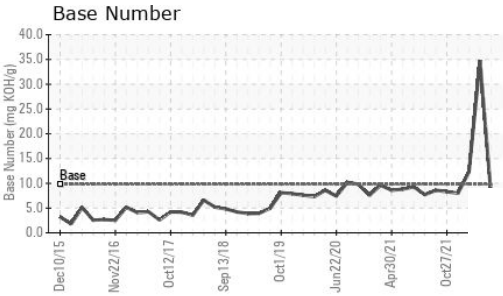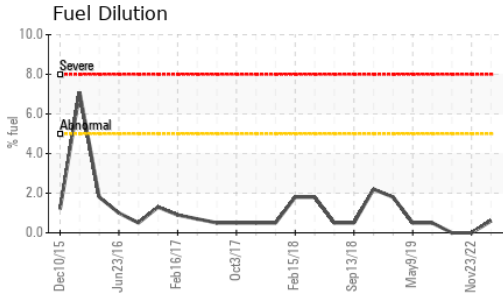

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	▲ LAYRD	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	● 0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.2	13.9	14.1

GRAPHS

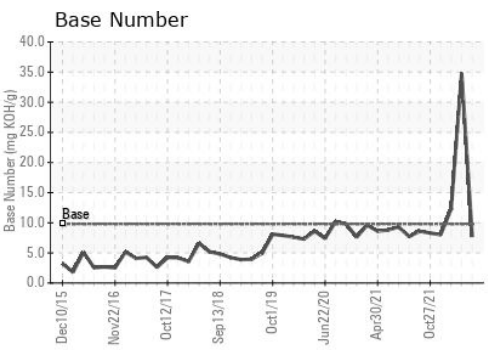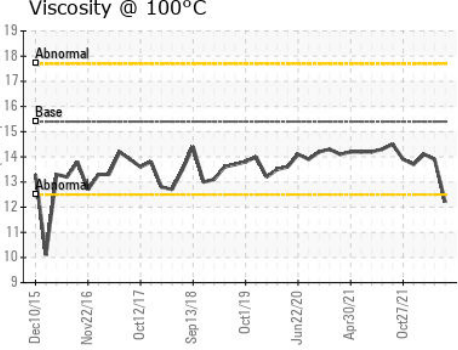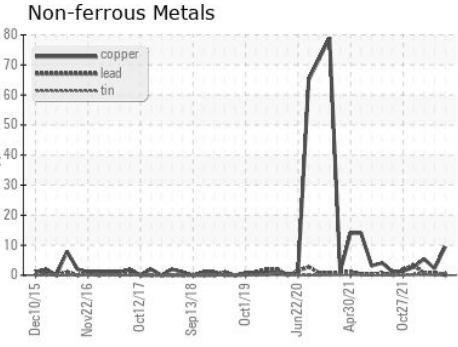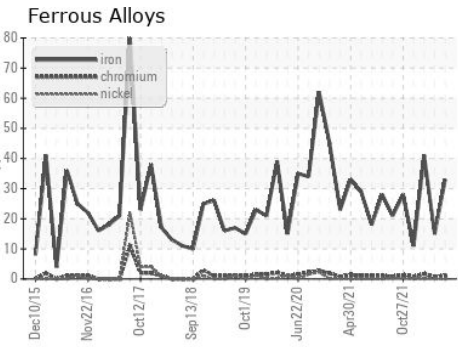

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0073306 **Received** : 09 Aug 2023
Lab Number : 05919643 **Diagnosed** : 10 Aug 2023
Unique Number : 10591557 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 102 - Morristown TN
 415 Ryder Lane, PO Box 1894
 Morristown, TN
 US 37813
 Contact: Ricky Dunlap
 ricky.dunlap@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)