

# PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id  
**AW 32 - MANOWSKE - PCA0087800**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

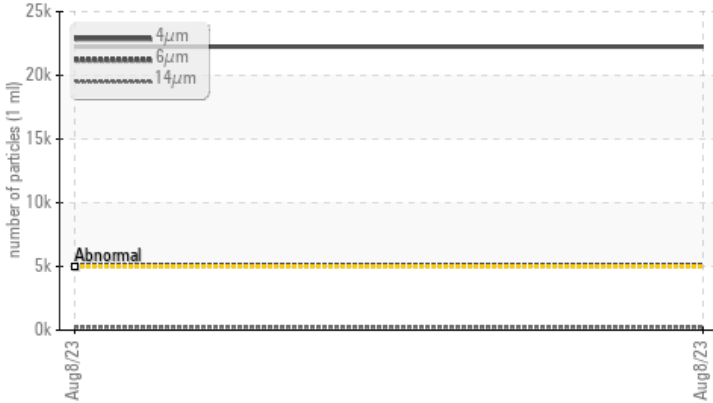

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>22255</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>5086</b>	---	---
Particles >14µm	ASTM D7647	>160	▲ <b>228</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>22/20/15</b>	---	---

Customer Id: COLFON  
 Sample No.: PCA0087800  
 Lab Number: 05919970  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**AW 32 - MANOWSKE - PCA0087800**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

This is a baseline read-out on the submitted sample.

### ▲ Contamination

There is a high amount of particulates present in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0087800</b>	---	---
Sample Date	Client Info			<b>08 Aug 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		<b>4</b>	---	---
Chromium	ppm	ASTM D5185m		<b>3</b>	---	---
Nickel	ppm	ASTM D5185m		<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m		<b>0</b>	---	---
Copper	ppm	ASTM D5185m		<b>2</b>	---	---
Tin	ppm	ASTM D5185m		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>69</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>428</b>	---	---
Zinc	ppm	ASTM D5185m		<b>461</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1621</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>▲ 22255</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 5086</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>▲ 228</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>40</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 22/20/15</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.35</b>	---	---

# OIL ANALYSIS REPORT

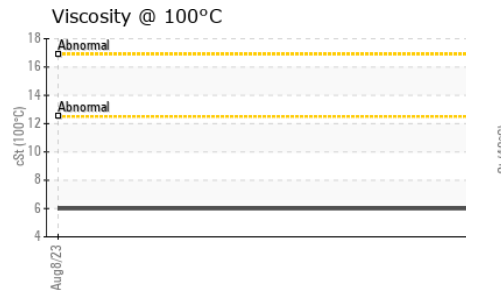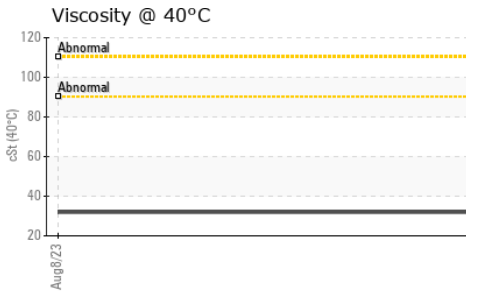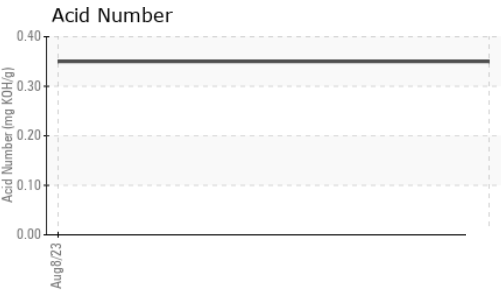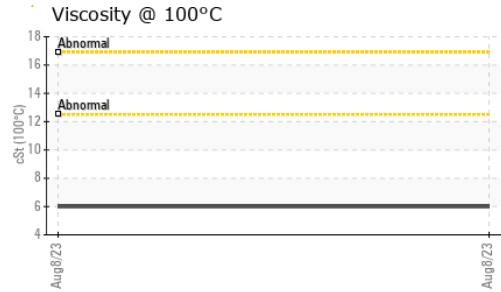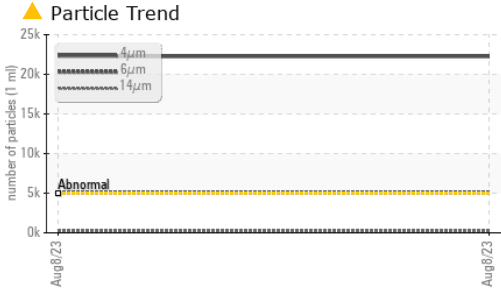






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.92	---	---
Visc @ 100°C	cSt	ASTM D445	5.99	---	---
Viscosity Index (VI)	Scale	ASTM D2270	135	---	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

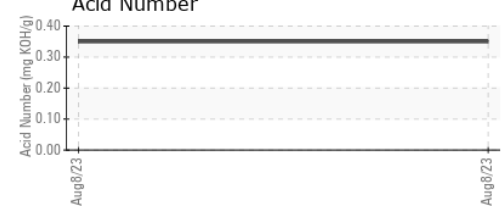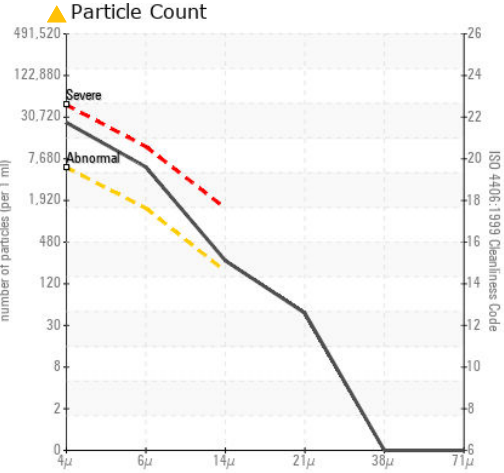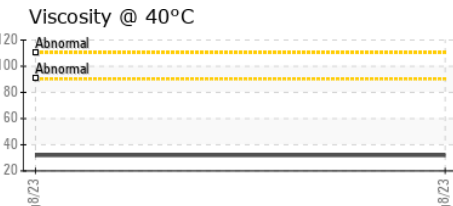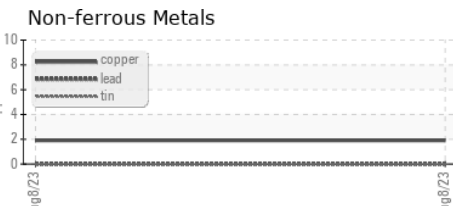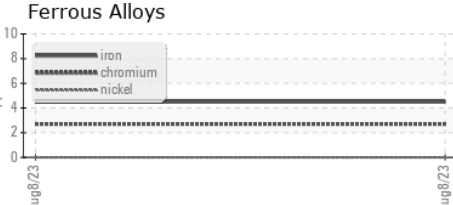

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0087800 **Received** : 10 Aug 2023  
**Lab Number** : 05919970 **Diagnosed** : 10 Aug 2023  
**Unique Number** : 10591884 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI )

**COLE OIL AND PROPANE**  
 265 FOREST AVE  
 FOND DU LAC, WI  
 US 54935  
 Contact: JOE BANASZEK  
 joe@coleoil.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)