

# **PROBLEM SUMMARY**

Sample Rating Trend


FUEL


Machine Id 10591 Component

**Diesel Engine** 

CHEVRON DELO 400 SDE SAE 15W40 (32 QTS)

# **COMPONENT CONDITION SUMMARY**

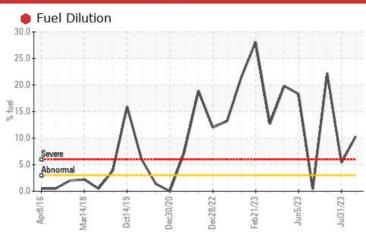

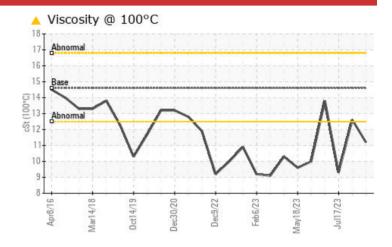

### RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATION	C TEST	RESULT	S			
Sample Status				SEVERE	ABNORMAL	SEVERE
Fuel	%	ASTM D3524	>3.0	<b>10.3</b>	<b>△</b> 5.4	22.2
Visc @ 100°C	cSt	ASTM D445	14.6	<b>11.2</b>	12.6	9.3

Customer Id: GFL073 Sample No.: GFL0069120 Lab Number: 05920053 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Wes Davis +1 905-569-8600 x223 wesd@wearcheck.ca

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS** Action **Status** Date Done By Description We recommend that you drain the oil from the component if this has not Change Fluid ? already been done. Resample ? We recommend an early resample to monitor this condition. Check Fuel/injector ? We advise that you check the fuel injection system. System

### HISTORICAL DIAGNOSIS

### 31 Jul 2023 Diag: Wes Davis

FUEL



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.



### 17 Jul 2023 Diag: Don Baldridge

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.



### 10 Jul 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Fuel content negligible. The BN result indicates that there is suitable alkalinity remaining in the oil.





# **OIL ANALYSIS REPORT**

Sample Rating Trend





Machine Id 10591 Component

**Diesel Engine** 

CHEVRON DELO 400 SDE SAE 15W40 (32 QTS)

## **DIAGNOSIS**

### Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.


### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

QTS)							
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		GFL0069120	GFL0069170	GFL0069177	
Sample Date		Client Info		07 Aug 2023	31 Jul 2023	17 Jul 2023	
Machine Age	hrs	Client Info		21481	21431	21349	
Oil Age	hrs	Client Info		50	82	599	
Oil Changed		Client Info		Not Changd	Changed	Changed	
Sample Status				SEVERE	ABNORMAL	SEVERE	
CONTAMINAT	ION	method	limit/base	current	history1	history2	
Glycol		WC Method		NEG	NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>75	3	2	25	
Chromium	ppm	ASTM D5185m	>5	<1	<1	2	
Nickel	ppm	ASTM D5185m	>4	0	0	0	
Titanium	ppm	ASTM D5185m	>2	0	0	0	
Silver	ppm	ASTM D5185m	>2	<1	0	0	
Aluminum	ppm	ASTM D5185m	>15	<1	<1	1	
Lead	ppm	ASTM D5185m	>25	0	0	0	
Copper	ppm	ASTM D5185m	>100	<1	0	0	
Tin	ppm	ASTM D5185m	>4	0	0	0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVEO			11 11 11			la la tarre O	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	limit/base	current 7	history1 16	nistory2 7	
	ppm		limit/base		•		
Boron		ASTM D5185m	limit/base	7	16	7	
Boron Barium	ppm	ASTM D5185m ASTM D5185m	limit/base	7 0	16 0	7	
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	7 0 56	16 0 58	7 0 46	
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	7 0 56 <1	16 0 58 <1	7 0 46 <1	
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	imit/base	7 0 56 <1 795	16 0 58 <1 926	7 0 46 <1 707	
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		7 0 56 <1 795 938	16 0 58 <1 926 997	7 0 46 <1 707 774	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	760	7 0 56 <1 795 938 879	16 0 58 <1 926 997 987	7 0 46 <1 707 774 743	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	760 800	7 0 56 <1 795 938 879 1047	16 0 58 <1 926 997 987 1193	7 0 46 <1 707 774 743 906	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	760 800 3000 limit/base	7 0 56 <1 795 938 879 1047 2780	16 0 58 <1 926 997 987 1193 3610	7 0 46 <1 707 774 743 906 2546	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	760 800 3000 limit/base	7 0 56 <1 795 938 879 1047 2780	16 0 58 <1 926 997 987 1193 3610 history1	7 0 46 <1 707 774 743 906 2546 history2	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	760 800 3000 limit/base	7 0 56 <1 795 938 879 1047 2780 current	16 0 58 <1 926 997 987 1193 3610 history1	7 0 46 <1 707 774 743 906 2546 history2	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	760 800 3000 limit/base >25	7 0 56 <1 795 938 879 1047 2780 current 3	16 0 58 <1 926 997 987 1193 3610 history1 2	7 0 46 <1 707 774 743 906 2546 history2 4	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	760 800 3000 limit/base >25 >20	7 0 56 <1 795 938 879 1047 2780 current 3 2	16 0 58 <1 926 997 987 1193 3610 history1 2 1	7 0 46 <1 707 774 743 906 2546 history2 4 3	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	760 800 3000 limit/base >25 >20 >3.0	7 0 56 <1 795 938 879 1047 2780  current 3 2 1	16 0 58 <1 926 997 987 1193 3610 history1 2 1 0 ▲ 5.4	7 0 46 <1 707 774 743 906 2546 history2 4 3 0 22.2	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED	ppm	ASTM D5185m	760 800 3000 limit/base >25 >20 >3.0 limit/base >6	7 0 56 <1 795 938 879 1047 2780  current 3 2 1 10.3  current	16 0 58 <1 926 997 987 1193 3610 history1 2 1 0 ▲ 5.4 history1	7 0 46 <1 707 774 743 906 2546 history2 4 3 0 22.2 history2	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844	760 800 3000 limit/base >25 >20 >3.0 limit/base >6	7 0 56 <1 795 938 879 1047 2780  current 3 2 1 10.3  current 0.2	16 0 58 <1 926 997 987 1193 3610 history1 2 1 0 ▲ 5.4 history1 0.1	7 0 46 <1 707 774 743 906 2546 history2 4 3 0 22.2 history2	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7624 *ASTM D7624	760 800 3000 limit/base >25 >20 >3.0 limit/base >6 >20	7 0 56 <1 795 938 879 1047 2780  current 3 2 1 10.3  current 0.2 7.1	16 0 58 <1 926 997 987 1193 3610 history1 2 1 0 ▲ 5.4 history1 0.1 5.6	7 0 46 <1 707 774 743 906 2546 history2 4 3 0 22.2 history2	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7624 *ASTM D7624	760 800 3000 limit/base >25 >20 >3.0 limit/base >6 >20 >30	7 0 56 <1 795 938 879 1047 2780  current 3 2 1 10.3  current 0.2 7.1 17.5	16 0 58 <1 926 997 987 1193 3610 history1 2 1 0 ▲ 5.4 history1 5.6 17.2	7 0 46 <1 707 774 743 906 2546 history2 4 3 0 22.2 history2 0.7 13.9 22.8	



# **OIL ANALYSIS REPORT**

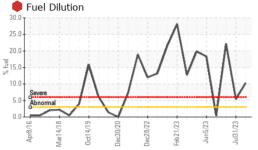


	٧
٨	Υ
<b>\</b>	V Y F S S A C
1/1/	S
H-V	
Y	S
Jul31/23	A
n jin	C
	Е


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


Abnor		@ 100					
Base							
Abnor	mal	//		1	^		$\Lambda \Lambda$
10					$\sim$	$\sim$	٧
Apr8/16	Mar14/18	Oct14/19	Jec30/20	Dec9/22	Feb6/23	May18/23	Jul17/23















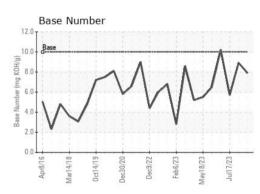





Laboratory Sample No. Lab Number Unique Number : 10591967

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : GFL0069120 : 05920053

Received

: 09 Aug 2023 Diagnosed : 10 Aug 2023 Diagnostician : Wes Davis

GFL Environmental - 073 - Warner Robbins - Transwaste 155 Story Road Warner Robbins, GA

US 31093 Contact: Mike Taft

Test Package : FLEET ( Additional Tests: PercentFuel ) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: