




OIL ANALYSIS REPORT

Sample Rating Trend

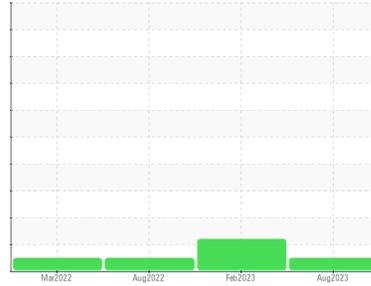

NORMAL



Machine Id
929071

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0076925	GFL0055229	GFL0055212
Sample Date	Client Info		03 Aug 2023	07 Feb 2023	24 Aug 2022
Machine Age	hrs	Client Info	12934	12683	12079
Oil Age	hrs	Client Info	241	578	581
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	20	21	25
Chromium	ppm	ASTM D5185m >4	<1	1	1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >25	2	<1	2
Lead	ppm	ASTM D5185m >45	<1	4	6
Copper	ppm	ASTM D5185m >85	<1	1	2
Tin	ppm	ASTM D5185m >4	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	20	13	22
Barium	ppm	ASTM D5185m 0	1	0	0
Molybdenum	ppm	ASTM D5185m 60	72	96	65
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	923	830	883
Calcium	ppm	ASTM D5185m 1070	1103	1013	1065
Phosphorus	ppm	ASTM D5185m 1150	995	867	913
Zinc	ppm	ASTM D5185m 1270	1193	1062	1172
Sulfur	ppm	ASTM D5185m 2060	3146	3048	2549

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	5	6	6
Sodium	ppm	ASTM D5185m	5	2	0
Potassium	ppm	ASTM D5185m >20	5	13	0
Fuel	%	ASTM D3524 >5	1.8	▲ 6.5	<1.0

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.8	0.9
Nitration	Abs/cm	*ASTM D7624 >20	7.6	10.5	11.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.0	20.9	22.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.7	19.0	19.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.5	7.9	8.9







OIL ANALYSIS REPORT

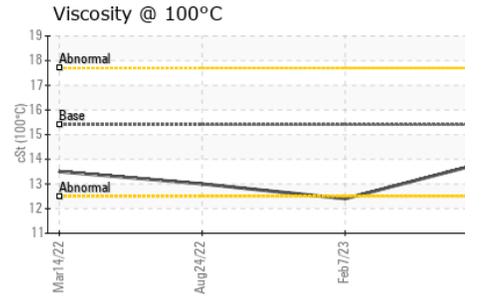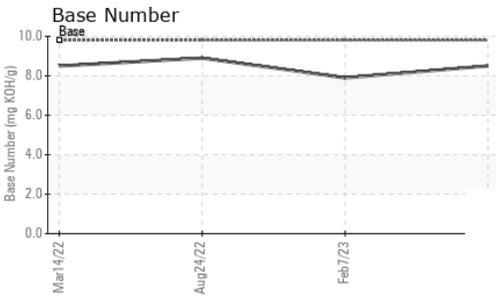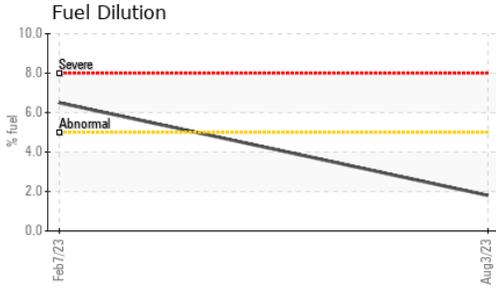

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	▲ 12.4	13.0

GRAPHS

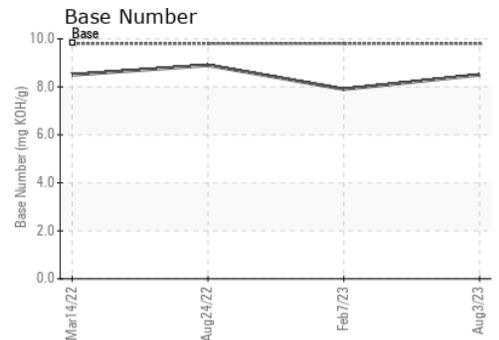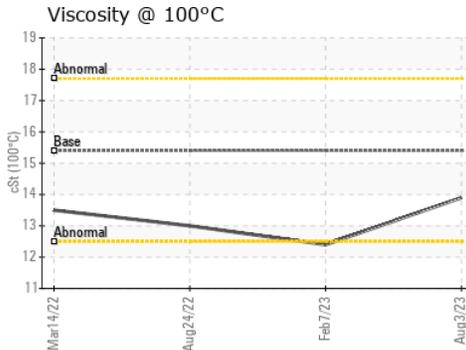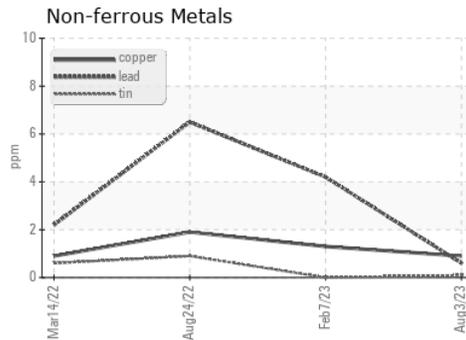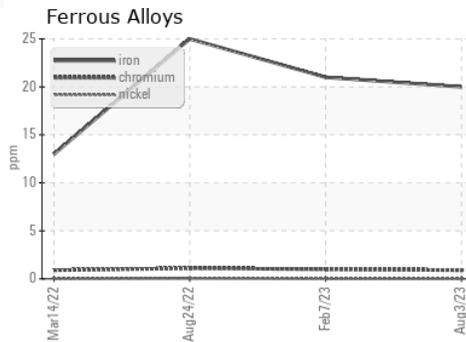

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0076925 **Received** : 09 Aug 2023
Lab Number : **05920124** **Diagnosed** : 11 Aug 2023
Unique Number : 10592038 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 930 - Mosinee HC
 1372 State Highway 34
 MOSINEE, WI
 US 54455
 Contact: Kirk Koss

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (715)571-2784

F: