


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

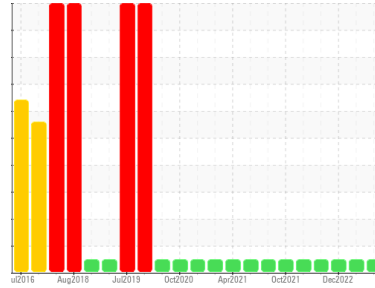

Area  
**KEMP QUARRIES / RIVER VALLEY ARKOMA**  
Machine Id  
**WL108**  
Component  
**Rear Left Final Drive**  
Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0084138</b>	PCA0070331	PCA0070458
Sample Date	Client Info		<b>04 Aug 2023</b>	23 Mar 2023	16 Dec 2022
Machine Age	hrs	Client Info	<b>25405</b>	45601	45035
Oil Age	hrs	Client Info	<b>0</b>	45601	42083
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>89</b>	80	353
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>3</b>	2	6
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	3
Copper	ppm	ASTM D5185m >75	<b>8</b>	5	33
Tin	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>1</b>	0	5
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	3
Magnesium	ppm	ASTM D5185m	<b>18</b>	21	15
Calcium	ppm	ASTM D5185m	<b>3785</b>	3470	3000
Phosphorus	ppm	ASTM D5185m	<b>1088</b>	979	1031
Zinc	ppm	ASTM D5185m	<b>1349</b>	1307	1265
Sulfur	ppm	ASTM D5185m	<b>5584</b>	5046	10509

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>25</b>	23	39
Sodium	ppm	ASTM D5185m	<b>3</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	4


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES









	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 195	<b>184</b>	182	194

# OIL ANALYSIS REPORT

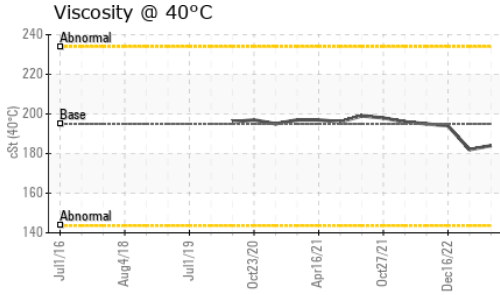

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

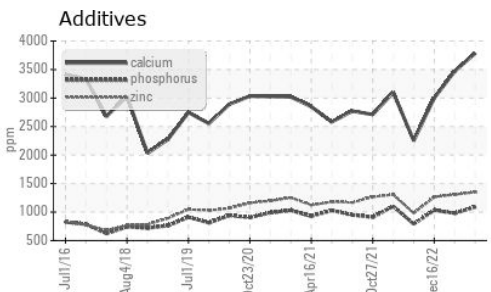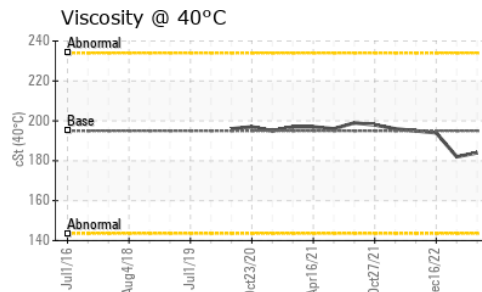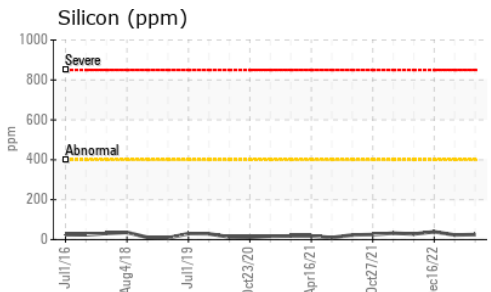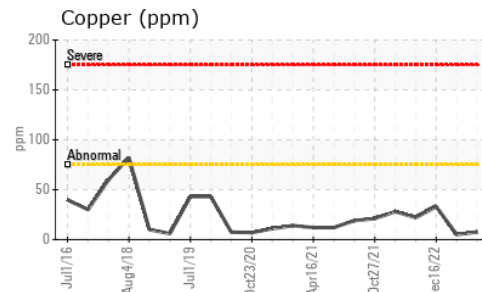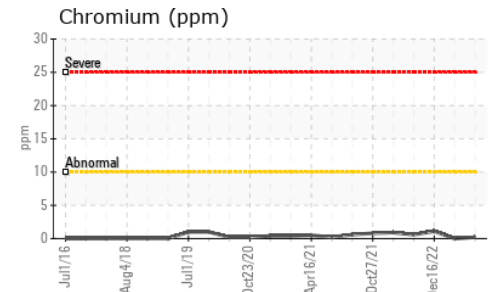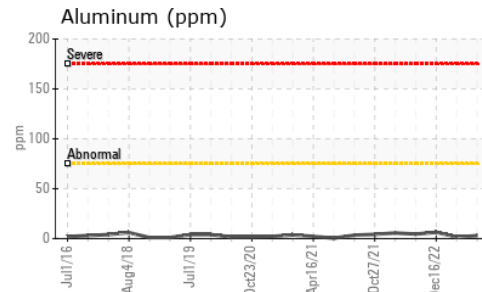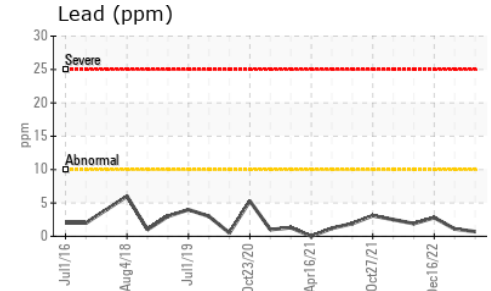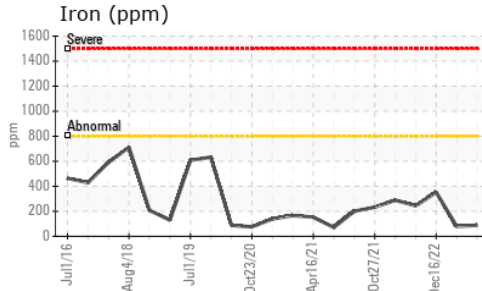

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0084138 **Received** : 09 Aug 2023  
**Lab Number** : 05920375 **Diagnosed** : 10 Aug 2023  
**Unique Number** : 10592289 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**Kemp Quarries - River Valley - Arkoma**  
 12971 HWY 9a  
 Shawnee, OK  
 US 74804  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

arkomashop@kempquarries.net

T:

F: