


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

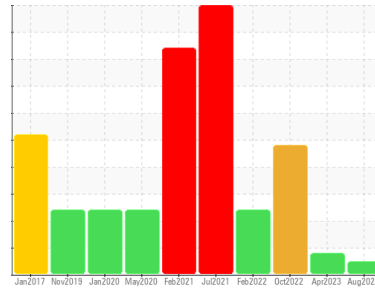

Area  
**Active**  
Machine Id  
**44**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0098476</b>	PCA0083102	PCA0078063
Sample Date	Client Info		<b>07 Aug 2023</b>	12 Apr 2023	04 Oct 2022
Machine Age	hrs	Client Info	<b>274807</b>	274807	274807
Oil Age	hrs	Client Info	<b>10162</b>	10162	14837
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	▲ 2.8
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>98</b>	▲ 142	▲ 127
Chromium	ppm	ASTM D5185m >20	<b>3</b>	3	5
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	▲ 8
Lead	ppm	ASTM D5185m >40	<b>7</b>	8	19
Copper	ppm	ASTM D5185m >330	<b>42</b>	66	▲ 315
Tin	ppm	ASTM D5185m >15	<b>2</b>	2	4
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	9	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	68	63
Manganese	ppm	ASTM D5185m 0	<b>2</b>	1	3
Magnesium	ppm	ASTM D5185m 1010	<b>896</b>	1002	930
Calcium	ppm	ASTM D5185m 1070	<b>1005</b>	1155	1070
Phosphorus	ppm	ASTM D5185m 1150	<b>896</b>	1046	989
Zinc	ppm	ASTM D5185m 1270	<b>1207</b>	1323	1196
Sulfur	ppm	ASTM D5185m 2060	<b>2817</b>	2526	2642

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	18	▲ 71
Sodium	ppm	ASTM D5185m	<b>7</b>	2	23
Potassium	ppm	ASTM D5185m >20	<b>5</b>	4	19



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.5</b>	1.4	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.8</b>	11.4	11.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.2</b>	23.3	25.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>24.2</b>	23.1	24.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.65</b>	11.38	8.27









# OIL ANALYSIS REPORT

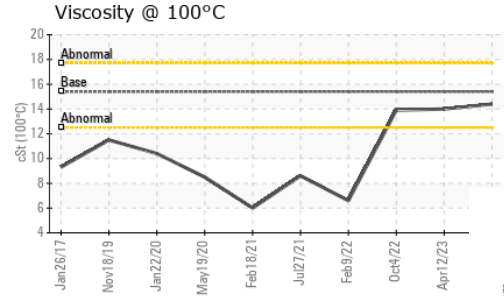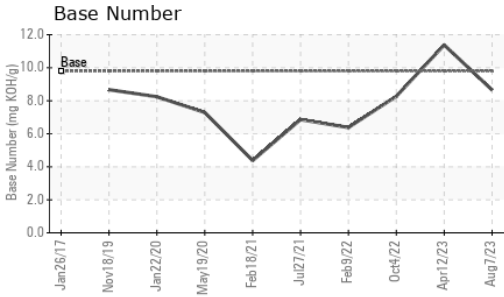

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.0	13.9

## GRAPHS

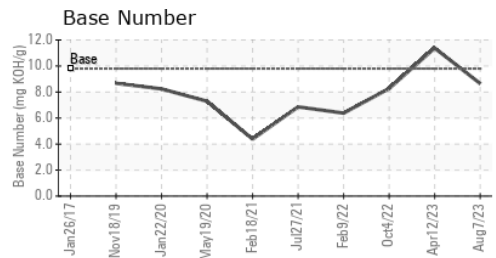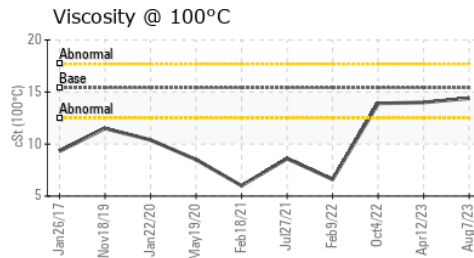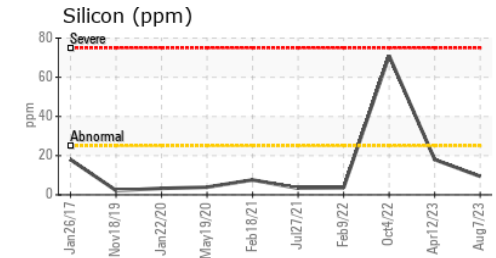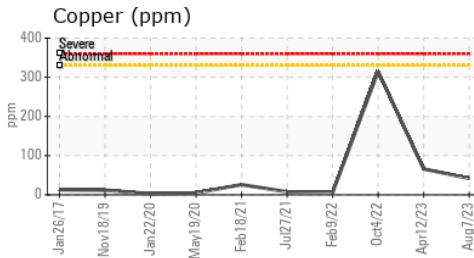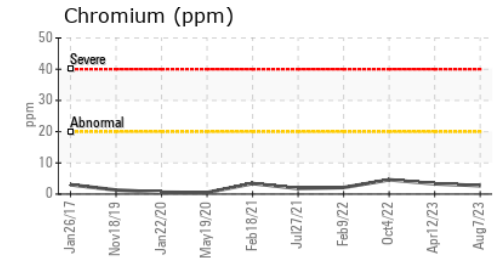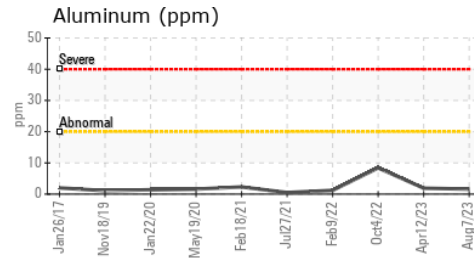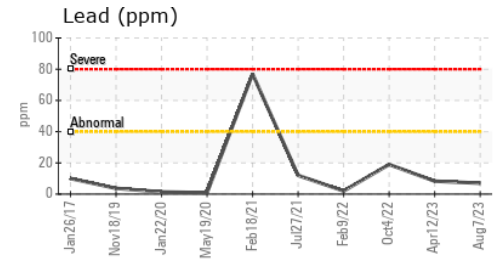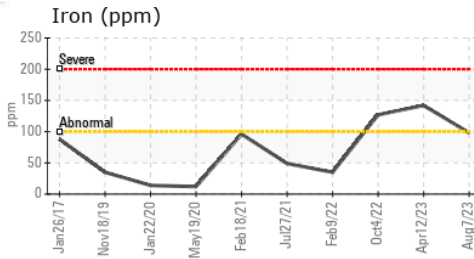

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0098476 **Received** : 10 Aug 2023  
**Lab Number** : **05920792** **Diagnosed** : 11 Aug 2023  
**Unique Number** : 10592706 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**REDI MIX SERVICES**  
 120 BERKLEY ST  
 TAUNTON, MA  
 US 02780  
 Contact: HENRY HOLLER  
 hholler@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: