

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
PC DURON HP 15W40 DRUM - PCA05920951
 Component
New (Unused) Oil
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA05920951	---	---
Sample Date	Client Info			09 Aug 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>5	<1	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>5	0	---	---
Lead	ppm	ASTM D5185m	>5	0	---	---
Copper	ppm	ASTM D5185m	>5	0	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		58	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		940	---	---
Calcium	ppm	ASTM D5185m		1032	---	---
Phosphorus	ppm	ASTM D5185m		1001	---	---
Zinc	ppm	ASTM D5185m		1178	---	---
Sulfur	ppm	ASTM D5185m		3163	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	4	---	---
Sodium	ppm	ASTM D5185m		2	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Base Number (BN)	mg KOH/g	ASTM D2896		10.42	---	---


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---
Free Water	scalar	*Visual		NEG	---	---




OIL ANALYSIS REPORT

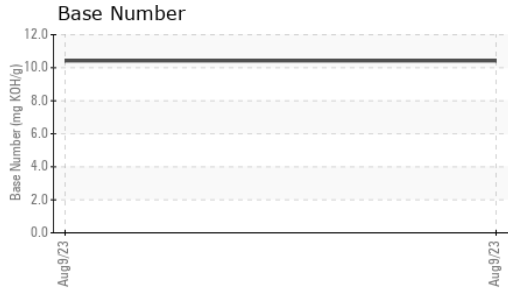






FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		116.8	---	---
Visc @ 100°C	cSt	ASTM D445		15.55	---	---
Viscosity Index (VI)	Scale	ASTM D2270		140	---	---

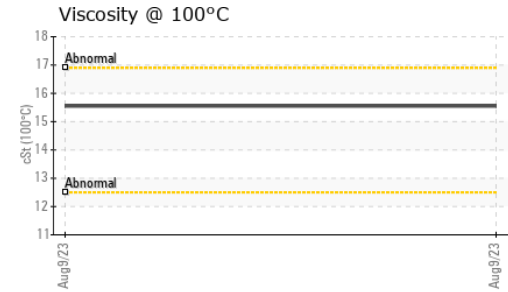

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

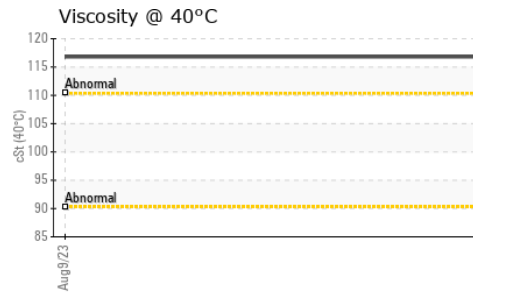

GRAPHS

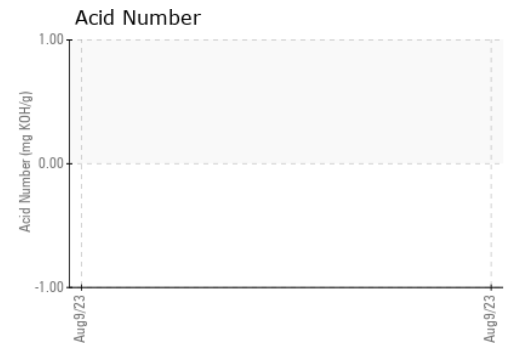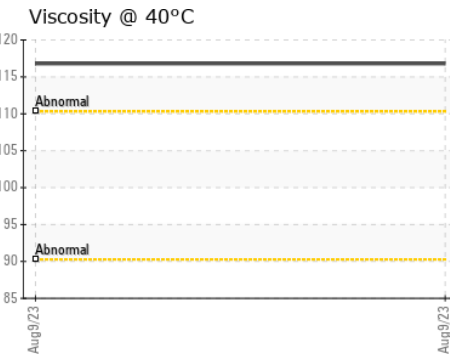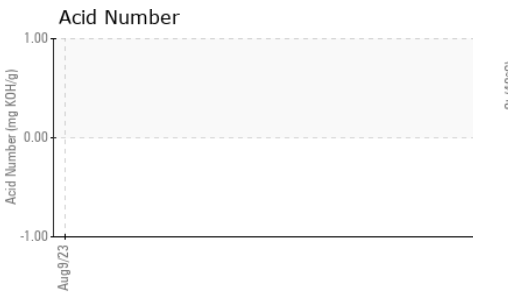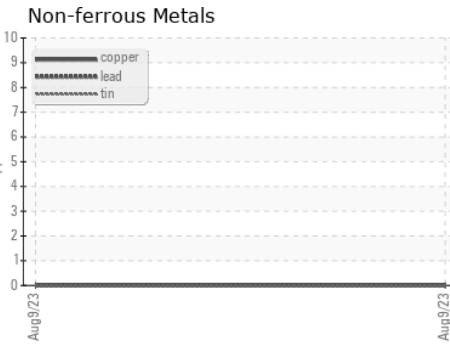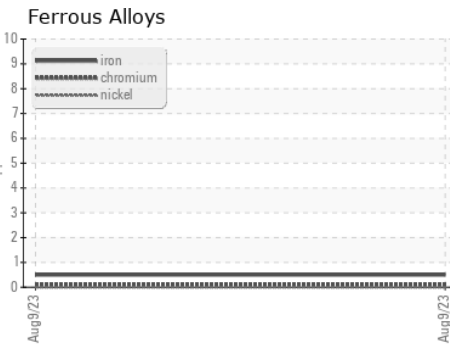

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **PETRO CANADA AMERICA LUBRICANTS INC**
Sample No. : PCA05920951 **Received** : 10 Aug 2023
Lab Number : **05920951** **Diagnosed** : 11 Aug 2023
Unique Number : 10592865 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, TBN, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369. **Contact:** Jason Schaben
 Jason.schaben@HFSinclair.com
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **T:**
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **F:**