

PROBLEM SUMMARY

Area
(89618X) Walgreens
 Machine Id
[Walgreens] 136A68006
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

Sample Rating Trend




GLYCOL



COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

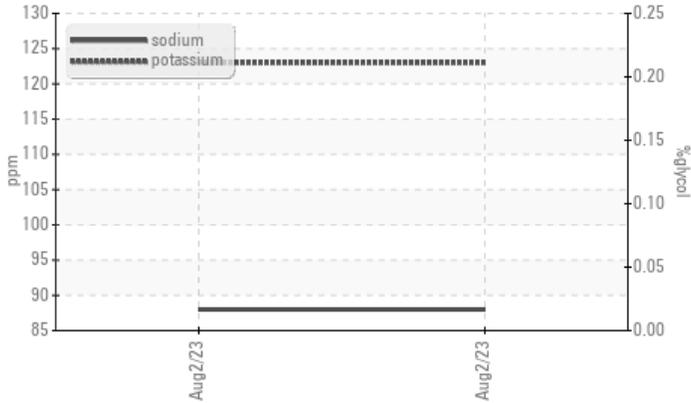

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Sodium	ppm	ASTM D5185m		▲ 88	---	---
Potassium	ppm	ASTM D5185m	>20	▲ 123	---	---

Customer Id: TSV1376
 Sample No.: PCA0093488
 Lab Number: 05921193
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Area
(89618X) Walgreens
 Machine Id
[Walgreens] 136A68006
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)



DIAGNOSIS

Recommendation
 We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear
 All component wear rates are normal.

Contamination
 Sodium and/or potassium levels are high.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0093488	---	---
Sample Date	Client Info	02 Aug 2023	---	---
Machine Age	mls Client Info	165438	---	---
Oil Age	mls Client Info	5518	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	32	---	---
Chromium	ppm ASTM D5185m >5	<1	---	---
Nickel	ppm ASTM D5185m >2	0	---	---
Titanium	ppm ASTM D5185m	4	---	---
Silver	ppm ASTM D5185m >3	0	---	---
Aluminum	ppm ASTM D5185m >30	4	---	---
Lead	ppm ASTM D5185m >30	0	---	---
Copper	ppm ASTM D5185m >150	30	---	---
Tin	ppm ASTM D5185m >5	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	15	---	---
Barium	ppm ASTM D5185m 0	1	---	---
Molybdenum	ppm ASTM D5185m 50	60	---	---
Manganese	ppm ASTM D5185m 0	<1	---	---
Magnesium	ppm ASTM D5185m 950	670	---	---
Calcium	ppm ASTM D5185m 1050	1170	---	---
Phosphorus	ppm ASTM D5185m 995	883	---	---
Zinc	ppm ASTM D5185m 1180	1086	---	---
Sulfur	ppm ASTM D5185m 2600	3186	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	6	---	---
Sodium	ppm ASTM D5185m	▲ 88	---	---
Potassium	ppm ASTM D5185m >20	▲ 123	---	---
Glycol	% *ASTM D2982	NEG	---	---




INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.5	---	---
Nitration	Abs/cm *ASTM D7624 >20	10.1	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	19.5	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.1	---	---
Base Number (BN)	mg KOH/g ASTM D2896	8.0	---	---





OIL ANALYSIS REPORT

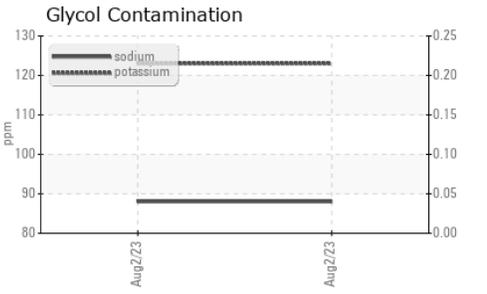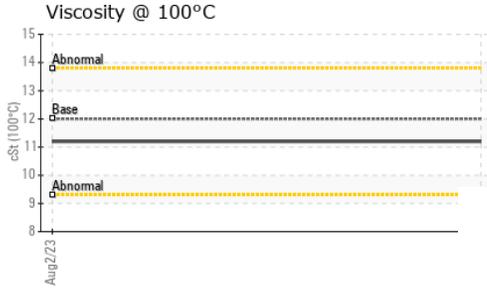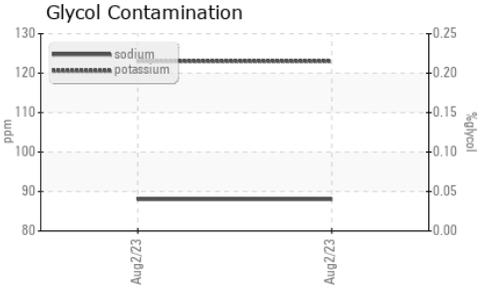

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	---

GRAPHS

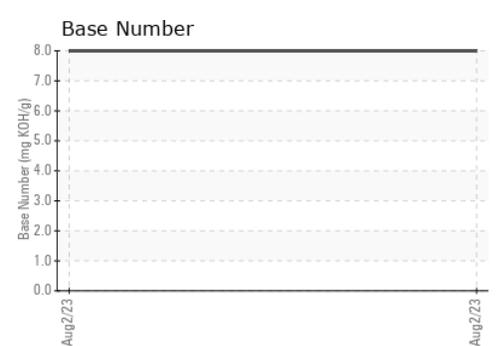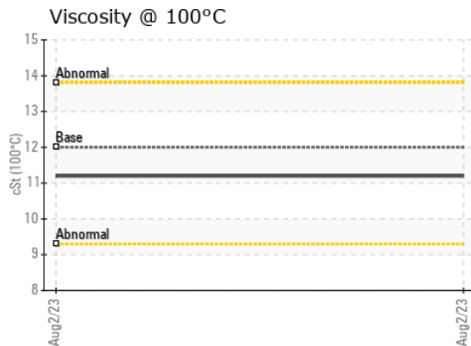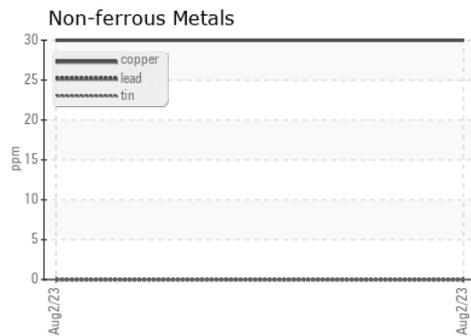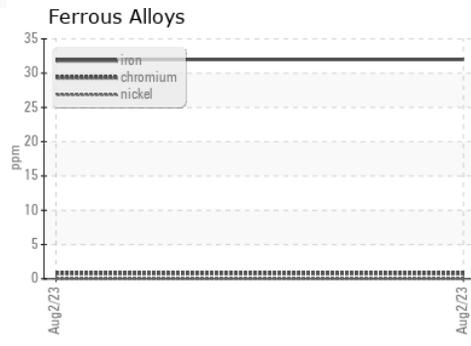

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0093488 **Received** : 10 Aug 2023
Lab Number : 05921193 **Diagnosed** : 11 Aug 2023
Unique Number : 10593107 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

Transervice - Shop 1376 - Berkeley-Linden
 3425 Tremley Point Road
 Linden, NJ
 US 07036
 Contact: Shop 1376 Oil Analysis
 shop1376@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)