
PROBLEM SUMMARY




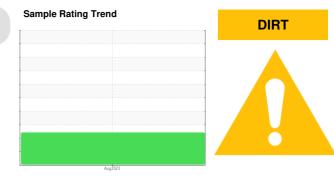

Machine Id 427190

Component 2 Differential Fluid GEAR OIL SAE 75W90 (--- GAL)

COMPONENT CONDITION SUMMARY

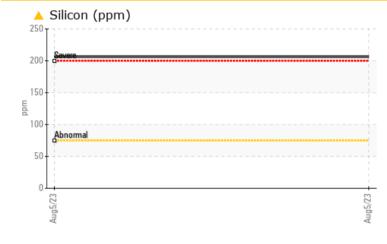

🔺 Aluminum (ppm)



RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: 2nd Axle / Tag)

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL				
Aluminum	ppm	ASTM D5185m	>25	<u> </u>				
Silicon	ppm	ASTM D5185m	>75	<u> </u>				

Customer Id: GFL983 Sample No.: GFL0089384 Lab Number: 05921864 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED	ECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description		
Check Dirt Access			?	We advise that you check all areas where dirt can enter the system.		

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

DIRT

Machine Id 427190

Component **2 Differential** Fluid GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: 2nd Axle / Tag)

A Wear

All component wear rates are normal for time on oil.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0089384		
Sample Date		Client Info		05 Aug 2023		
Machine Age	mls	Client Info		318792		
Oil Age	mls	Client Info		318792		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	573		
Chromium	ppm	ASTM D5185m	>10	5		
Nickel	ppm	ASTM D5185m	>10	38		
	ppm	ASTM D5185m		<1		
	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m	>25	<u> </u>		
	ppm	ASTM D5185m	>25	0		
	ppm		>100	2		
	ppm	ASTM D5185m	>10	ء <1		
		ASTM D5185m	~10	<1		
	ppm ppm	ASTM D5185m		<1 <1		
ADDITIVES	pp	method	limit/base	current	history1	history2
	nnm	ASTM D5185m	400	181		
	ppm			-		
	ppm	ASTM D5185m	200	0		
	ppm	ASTM D5185m	12	<1		
•	ppm	ASTM D5185m	10	12		
	ppm	ASTM D5185m	12	5		
	ppm	ASTM D5185m	150	25		
	ppm	ASTM D5185m	1650	1252		
	ppm	ASTM D5185m	125	40		
Sulfur	ppm	ASTM D5185m	22500	25056		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<u> </u>		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	7		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	MODER		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NORML	NORML		
	scalar	*Visual	NORML	NORML		
	scalar	*Visual	>.2	NEG		
	scalar	*Visual	- 16	NEG		
FLUID PROPER		method	limit/base	current	history1	history2
					matory	mistory2
Visc @ 40°C	cSt	ASTM D445	109	101		

Report Id: GFL983 [WUSCAR] 05921864 (Generated: 08/12/2023 13:36:29) Rev: 1

Submitted By: TECHNICIAN ACCOUNT



OIL ANALYSIS REPORT

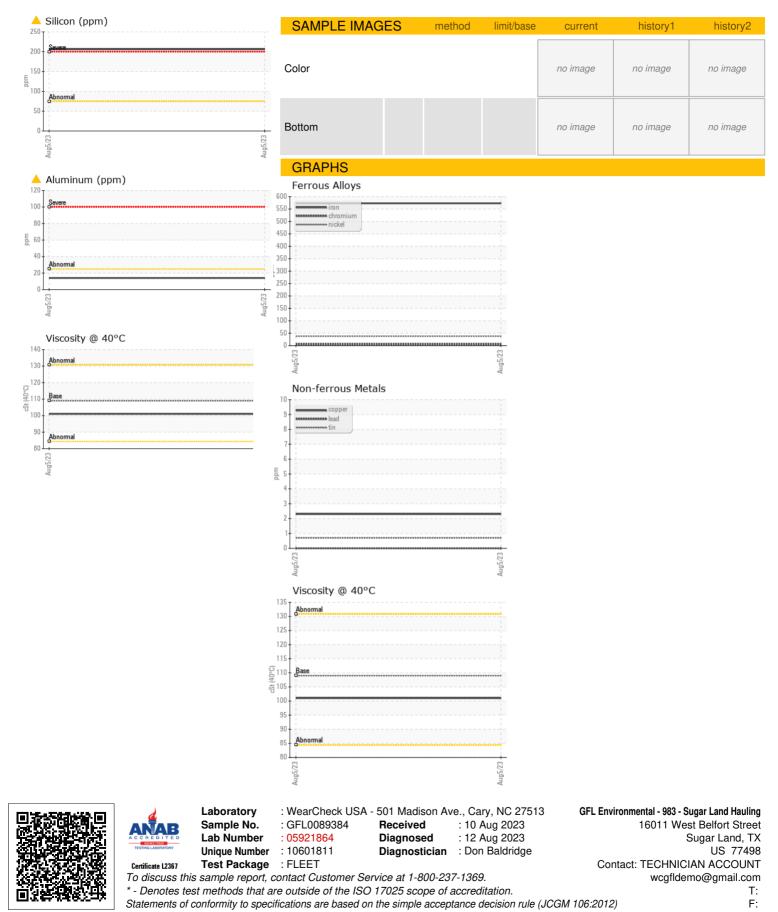

Submitted By: TECHNICIAN ACCOUNT