




PROBLEM SUMMARY

Sample Rating Trend

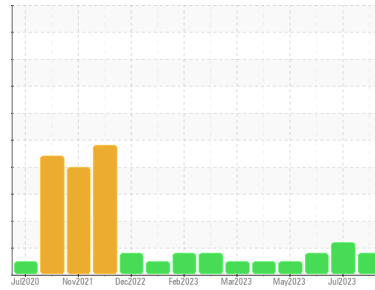


FUEL



Machine Id
728008
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (12 QTS)

COMPONENT CONDITION SUMMARY

▲ Fuel Dilution

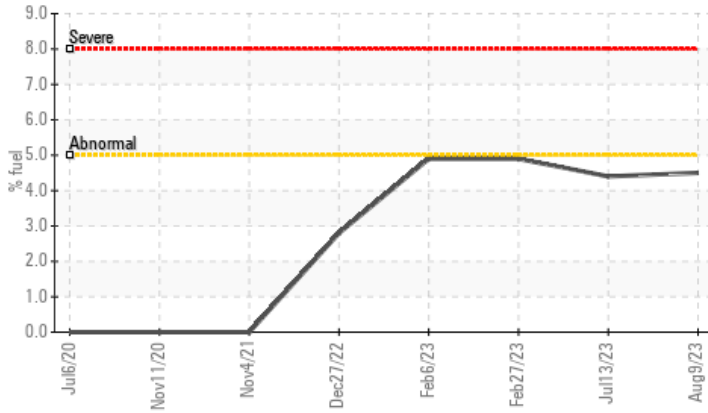

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

PROBLEMATIC TEST RESULTS

Sample Status				MARGINAL	ABNORMAL	ABNORMAL
Fuel	%	ASTM D3524	>5	▲ 4.5	▲ 4.4	<1.0

Customer Id: GFL073
 Sample No.: GFL0069123
 Lab Number: 05922004
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Jul 2023 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



19 Jun 2023 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. Valve wear is indicated. All other component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



17 May 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

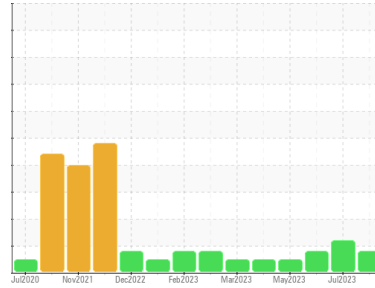

FUEL



Machine Id
728008

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (12 QTS)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0069123	GFL0069187	GFL0068719
Sample Date	Client Info	09 Aug 2023	13 Jul 2023	19 Jun 2023
Machine Age	hrs	Client Info	11105	10970
Oil Age	hrs	Client Info	612	477
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		MARGINAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	38	26	8
Chromium	ppm	ASTM D5185m >20	1	<1	<1
Nickel	ppm	ASTM D5185m >4	<1	<1	▲ 11
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	<1	0	0
Aluminum	ppm	ASTM D5185m >20	6	3	1
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	4	3	<1
Tin	ppm	ASTM D5185m >15	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	3	3	8
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	64	63	66
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	895	861	860
Calcium	ppm	ASTM D5185m 1070	1061	1044	1052
Phosphorus	ppm	ASTM D5185m 1150	922	954	997
Zinc	ppm	ASTM D5185m 1270	1170	1136	1139
Sulfur	ppm	ASTM D5185m 2060	2564	2818	2980

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	9	8	5
Sodium	ppm	ASTM D5185m	6	2	0
Potassium	ppm	ASTM D5185m >20	2	2	2
Fuel	%	ASTM D3524 >5	▲ 4.5	▲ 4.4	<1.0

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.4	0.3	0.7
Nitration	Abs/cm	*ASTM D7624 >20	10.2	8.9	5.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.9	19.0	18.0

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.6	16.3	13.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.1	7.5	9.7







OIL ANALYSIS REPORT

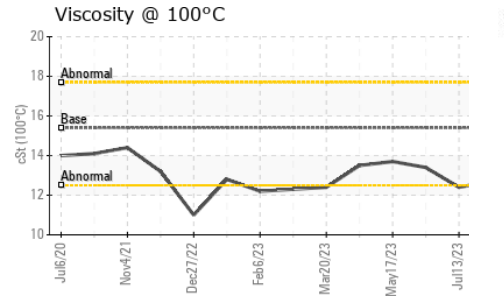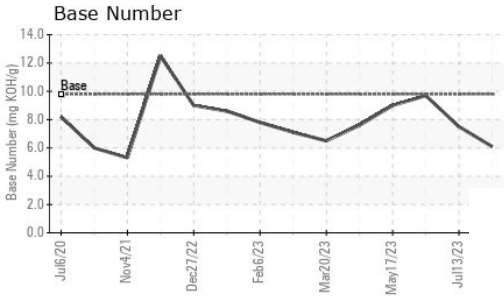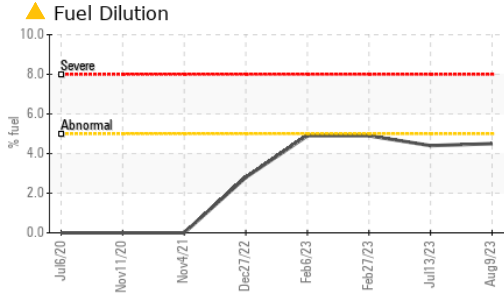

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	▲ 12.4	13.4

GRAPHS

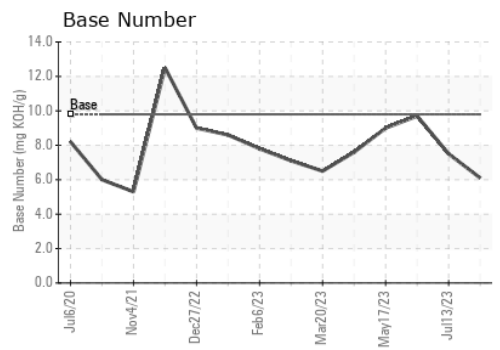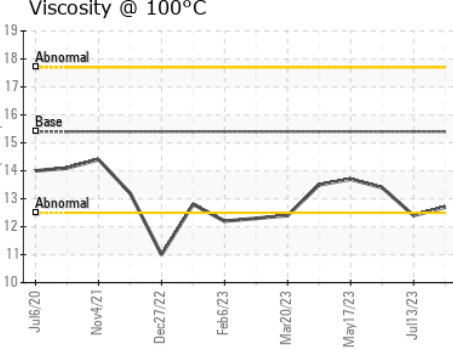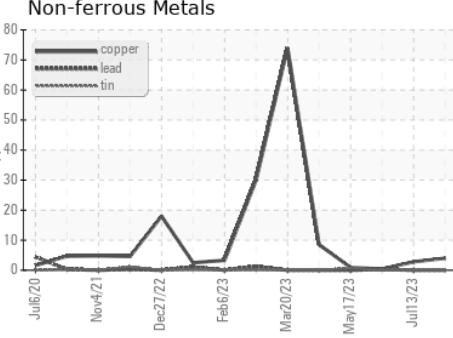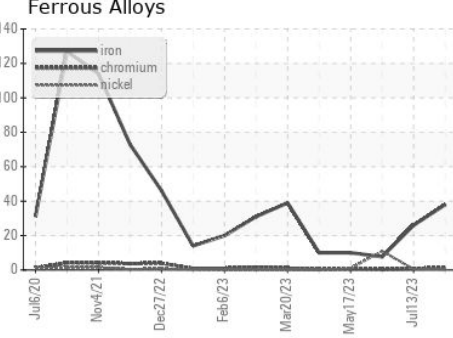

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0069123 **Received** : 11 Aug 2023
Lab Number : 05922004 **Diagnosed** : 14 Aug 2023
Unique Number : 10601951 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 073 - Warner Robbins - Transwaste
 155 Story Road
 Warner Robbins, GA
 US 31093
 Contact: JOSH MALONEY
 jmaloney@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)