




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Machine Id  
**2296**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (60 QTS)**

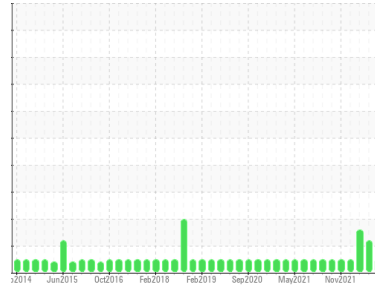

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: I)

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0081024</b>  | GFL0047432  | GFL0070776  |
| Sample Date   | Client Info |             | <b>04 Aug 2023</b> | 10 Jul 2023 | 20 Mar 2023 |
| Machine Age   | hrs         | Client Info | <b>1790999</b>     | 1790999     | 1790692     |
| Oil Age       | hrs         | Client Info | <b>600</b>         | 600         | 600         |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | MARGINAL    | ABNORMAL    |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | ▲ 2.0    | ▲ 4.7    |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >120 | <b>6</b>     | 9        | 72       |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | <1       | 2        |
| Nickel   | ppm    | ASTM D5185m >5   | <b>&lt;1</b> | 0        | 0        |
| Titanium | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >20  | <b>3</b>     | <1       | 4        |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | 0        | 13       |
| Copper   | ppm    | ASTM D5185m >330 | <b>&lt;1</b> | 1        | 7        |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | 0        | <1       |
| Antimony | ppm    | ASTM D5185m      | <b>---</b>   | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>6</b>     | 150      | 4        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>58</b>    | 17       | 65       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | 1        |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>879</b>   | 151      | 1006     |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1109</b>  | 2043     | 1161     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>994</b>   | 951      | 1046     |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1208</b>  | 1157     | 1287     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3332</b>  | 4002     | 3263     |

## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>3</b> | 2        | 7        |
| Sodium    | ppm    | ASTM D5185m     | <b>1</b> | 1        | 4        |
| Potassium | ppm    | ASTM D5185m >20 | <b>2</b> | 4        | 2        |

## INFRA-RED



|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >4  | <b>0.7</b>  | 0.5      | ▲ 5.7    |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>5.7</b>  | 5.9      | 14.4     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.5</b> | 19.3     | 31.7     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>13.4</b> | 14.6     | 19.2     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>9.1</b>  | 8.2      | ---      |







# OIL ANALYSIS REPORT

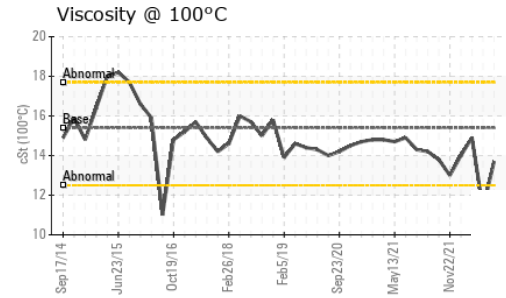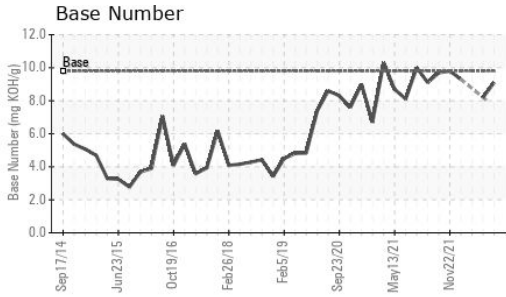

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>13.7</b> | ▲ 11.3   | 14.9 |

## GRAPHS

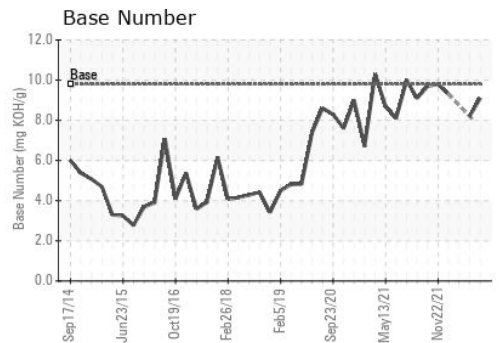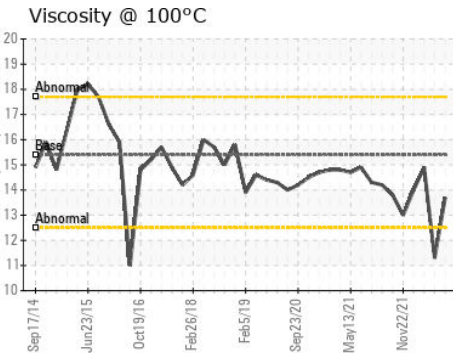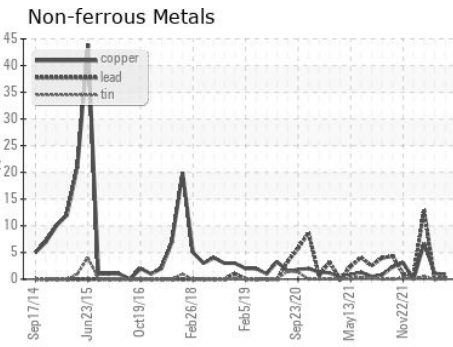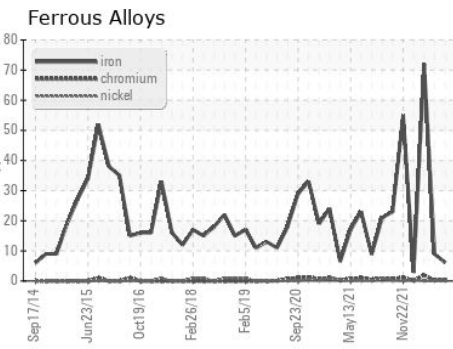

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0081024 **Received** : 11 Aug 2023  
**Lab Number** : **05922046** **Diagnosed** : 12 Aug 2023  
**Unique Number** : 10601993 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 030 - Conway Myrtle Beach**  
 3010 HWY 378  
 Conway, SC  
 US 29527  
 Contact: CHET STROSCHINE  
 cstroschine@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: