




# OIL ANALYSIS REPORT

## Sample Rating Trend

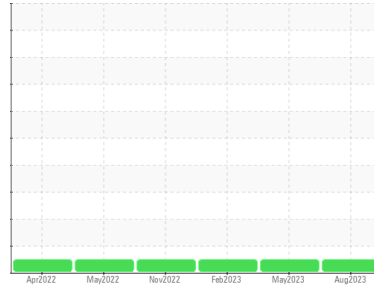

**NORMAL**



Machine Id  
**229053-19**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091986</b>	GFL0075098	GFL0063159
Sample Date	Client Info		<b>10 Aug 2023</b>	10 May 2023	09 Feb 2023
Machine Age	hrs	Client Info	<b>462</b>	386	318
Oil Age	hrs	Client Info	<b>462</b>	265	318
Oil Changed	Client Info		<b>N/A</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>6</b>	5	5
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	6	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	65	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>1021</b>	1070	893
Calcium	ppm	ASTM D5185m 1070	<b>1126</b>	1209	1071
Phosphorus	ppm	ASTM D5185m 1150	<b>1155</b>	1160	1012
Zinc	ppm	ASTM D5185m 1270	<b>1380</b>	1423	1177
Sulfur	ppm	ASTM D5185m 2060	<b>4272</b>	4128	3125

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	3
Sodium	ppm	ASTM D5185m	<b>1</b>	1	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	5	1

### INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.9</b>	4.7	4.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.0</b>	18.0	17.8

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.4</b>	13.1	13.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.0</b>	9.6	9.3







# OIL ANALYSIS REPORT

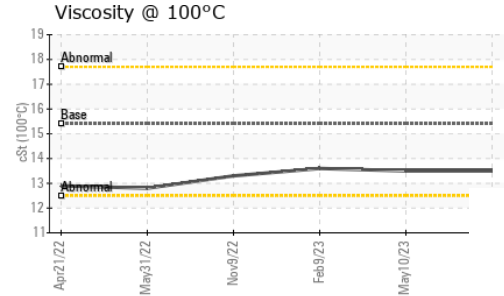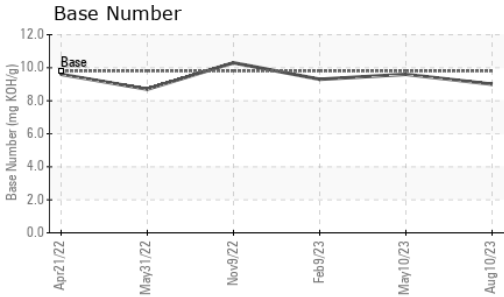

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.5	13.6

## GRAPHS

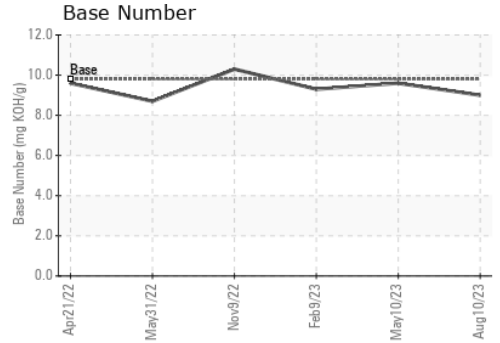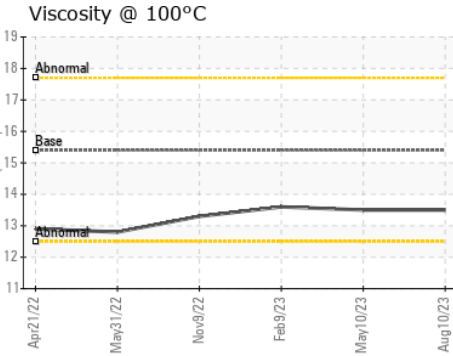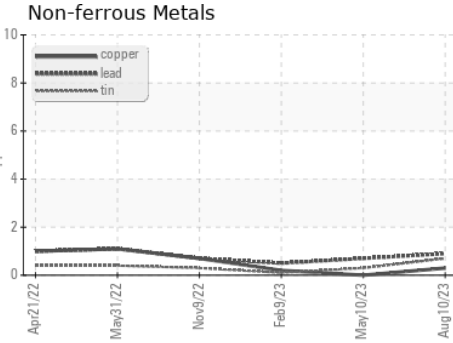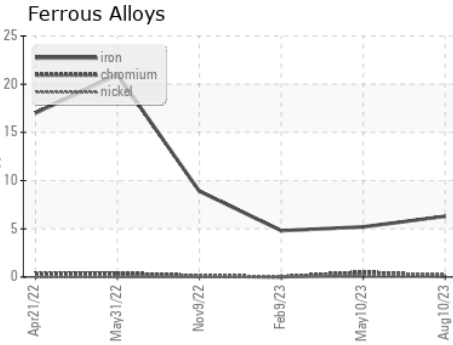

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091986 **Received** : 11 Aug 2023  
**Lab Number** : 05922646 **Diagnosed** : 14 Aug 2023  
**Unique Number** : 10602593 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 683 - Ruckersville Hauling**  
 261 INDUSTRIAL DR  
 Ruckersville, VA  
 US 22698  
 Contact: Jaf Finney  
 jfinney@gflenv.com  
 T: (434)990-4972  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)