




# OIL ANALYSIS REPORT

Sample Rating Trend

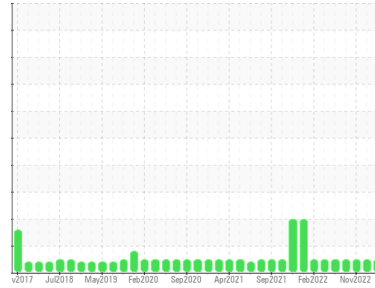

**NORMAL**



Machine Id

**3772**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0079031</b>	GFL0049375	GFL0049445	
Sample Date	Client Info	<b>09 Aug 2023</b>	09 Feb 2023	01 Nov 2022	
Machine Age	hrs	Client Info	<b>12343</b>	210650	11318
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >165	<b>14</b>	13	17
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	<1	<1
Lead	ppm ASTM D5185m >150	<b>2</b>	2	3
Copper	ppm ASTM D5185m >90	<b>2</b>	<1	1
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>6</b>	2	5
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	54	62
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>911</b>	842	929
Calcium	ppm ASTM D5185m 1070	<b>1123</b>	1151	1307
Phosphorus	ppm ASTM D5185m 1150	<b>1024</b>	949	1121
Zinc	ppm ASTM D5185m 1270	<b>1274</b>	1195	1361
Sulfur	ppm ASTM D5185m 2060	<b>3595</b>	3331	3722

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >35	<b>11</b>	10	21
Sodium	ppm ASTM D5185m	<b>4</b>	2	4
Potassium	ppm ASTM D5185m >20	<b>2</b>	0	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >7.5	<b>0.4</b>	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	7.9	9.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.7</b>	18.6	21.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	14.1	16
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.7</b>	8.0	8.8







# OIL ANALYSIS REPORT

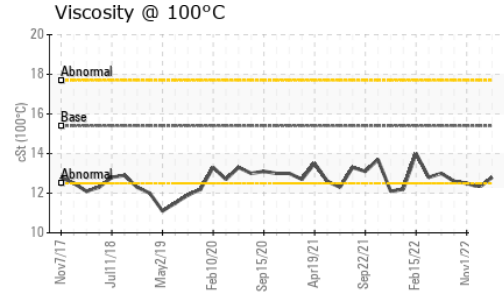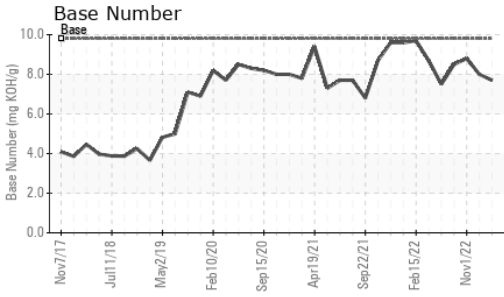

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	12.3	12.5

## GRAPHS

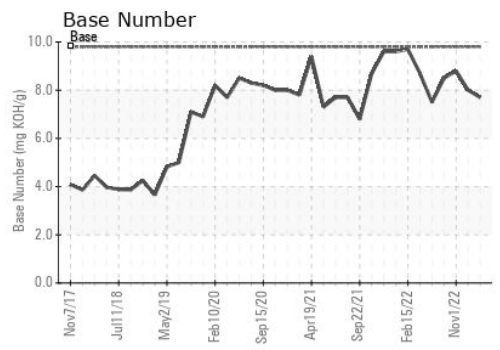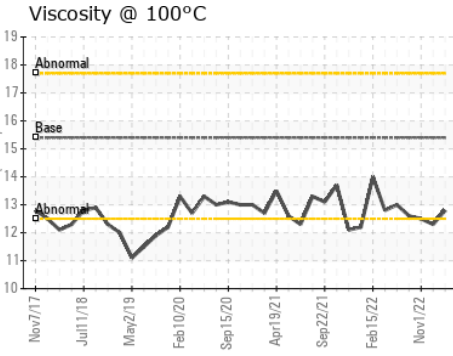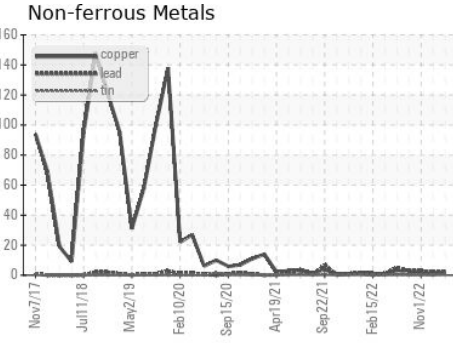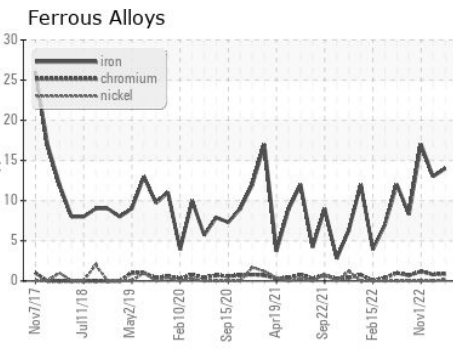

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0079031 **Received** : 11 Aug 2023  
**Lab Number** : **05922704** **Diagnosed** : 13 Aug 2023  
**Unique Number** : 10602651 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 029 - Wytheville**  
 2390 North 4th Street  
 Wytheville, VA  
 US 24382  
 Contact: CHARLES CORVIN  
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com  
 T: (276)223-4476  
 F: (276)223-1283

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)