




# OIL ANALYSIS REPORT

Sample Rating Trend

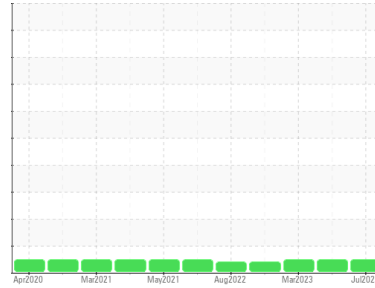

**NORMAL**



Machine Id  
**828047-6039**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0079764</b>	GFL0079764	GFL0059569
Sample Date	Client Info		<b>20 Jul 2023</b>	15 Jun 2023	07 Mar 2023
Machine Age	hrs	Client Info	<b>189870</b>	189870	13781
Oil Age	hrs	Client Info	<b>125032</b>	125032	13781
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>26</b>	15	4
Chromium	ppm	ASTM D5185m >4	<b>2</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>6</b>	5	9
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >85	<b>4</b>	0	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>16</b>	15	21
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	58	52
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>988</b>	947	818
Calcium	ppm	ASTM D5185m 1070	<b>1202</b>	1089	1166
Phosphorus	ppm	ASTM D5185m 1150	<b>1079</b>	1009	909
Zinc	ppm	ASTM D5185m 1270	<b>1328</b>	1261	1147
Sulfur	ppm	ASTM D5185m 2060	<b>3725</b>	3430	3126

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>22</b>	5	3
Sodium	ppm	ASTM D5185m	<b>38</b>	26	9
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.5</b>	9.5	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	21.3	18.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	18.0	14.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.2</b>	7.2	8.4







# OIL ANALYSIS REPORT

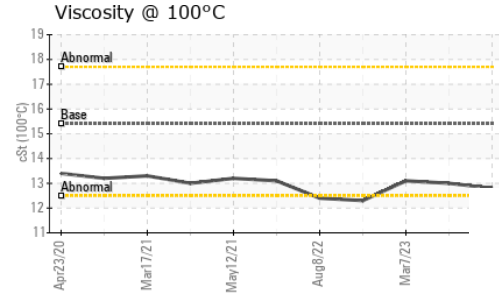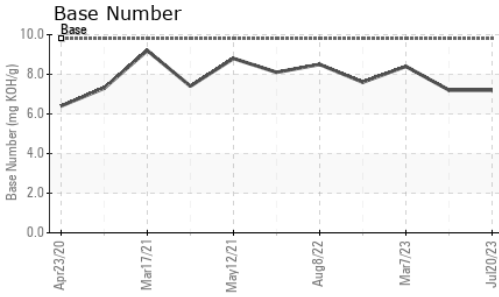

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	13.0	13.1

## GRAPHS

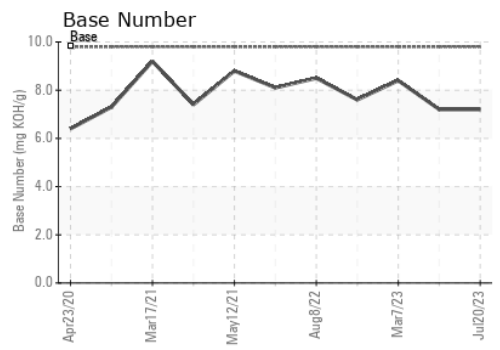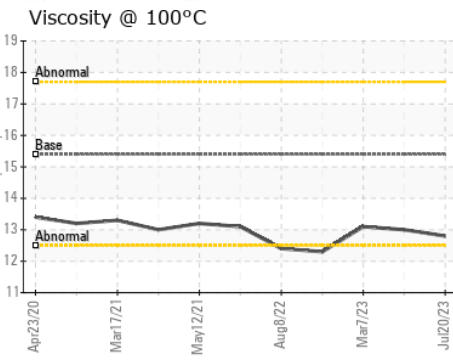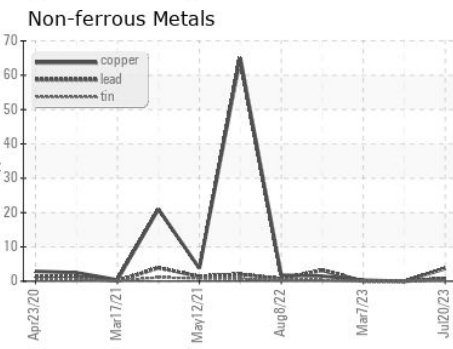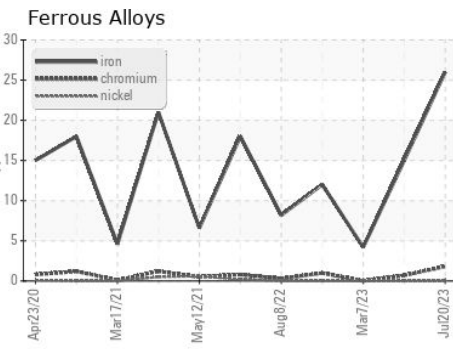

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0079764 **Received** : 11 Aug 2023  
**Lab Number** : **05922741** **Diagnosed** : 14 Aug 2023  
**Unique Number** : 10602688 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 663 - Lake Ariel (Scranton Hauling)**  
 17 Industrial Park Rd  
 Lake Ariel, PA  
 US 18436  
 Contact: Eric Merone  
 emerone@countyrecycling.net  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)