


OIL ANALYSIS REPORT

Samp



NORMAL



Machine Id **626265**

Component **Diesel Engine**

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2							
Cample Number Client Info PCA0100884	TS)				Jul2023		
Company Comp	SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Machine Age mls Client Info 137735	Sample Number		Client Info		PCA0100884		
Oil Age	Sample Date		Client Info		20 Jul 2023		
Contamped Client Info NoRMAL Contamped Contamped NoRMAL Contamped Contampe	Machine Age	mls	Client Info		137735		
CONTAMINATION method limit/base current history1 history2	Oil Age	mls	Client Info		137735		
CONTAMINATION method limit/base current history1 history2 Fuel WC Method >5 <1.0	Oil Changed		Client Info		Changed		
Fuel	Sample Status				NORMAL		
WEAR METALS	CONTAMINAT	ION	method	limit/base	current	history1	history2
WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185m >100 28	Fuel		WC Method	>5	<1.0		
Chromium	Glycol		WC Method		NEG		
Chromium	WEAR METAL	S	method	limit/base	current	history1	history2
Chromium	Iron	ppm	ASTM D5185m	>100	28		
Nickel	Chromium		ASTM D5185m	>20	<1		
Silver	Nickel		ASTM D5185m	>4	0		
Aluminum	Titanium	ppm	ASTM D5185m		<1		
Lead	Silver	ppm	ASTM D5185m	>3	<1		
Copper ppm ASTM D5185m >330 2 Tin ppm ASTM D5185m >15 <1	Aluminum	ppm	ASTM D5185m	>20	8		
Tin	Lead	ppm	ASTM D5185m	>40	<1		
Vanadium ppm ASTM D5185m <1 Cadmium ppm ASTM D5185m <1 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 2 5 Barium ppm ASTM D5185m 0 <1 Molybdenum ppm ASTM D5185m 50 70 Manganese ppm ASTM D5185m 950 949 Magnesium ppm ASTM D5185m 950 949 Calcium ppm ASTM D5185m 950 1254 Phosphorus ppm ASTM D5185m 1050 1254 Zinc ppm ASTM D5185m 2600 3668 Sulfur ppm ASTM D5185m >25 8 <	Copper	ppm	ASTM D5185m	>330	2		
ADDITIVES	Tin	ppm	ASTM D5185m	>15	<1		
ADDITIVES	Vanadium	ppm	ASTM D5185m		<1		
Boron ppm ASTM D5185m 2 5 Barium ppm ASTM D5185m 0 <1 Molybdenum ppm ASTM D5185m 50 70 Magnese ppm ASTM D5185m 0 1 Magnesium ppm ASTM D5185m 950 949 Magnesium ppm ASTM D5185m 1050 1254	Cadmium	ppm	ASTM D5185m		<1		
Barium ppm ASTM D5185m 0 <1 Molybdenum ppm ASTM D5185m 50 70 Manganese ppm ASTM D5185m 0 1 Magnesium ppm ASTM D5185m 950 949 Calcium ppm ASTM D5185m 1050 1254 Phosphorus ppm ASTM D5185m 995 1048 Zinc ppm ASTM D5185m 995 1048 Zinc ppm ASTM D5185m 2600 3668 Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185m 50 70 Manganese ppm ASTM D5185m 0 1 Magnesium ppm ASTM D5185m 950 949 Calcium ppm ASTM D5185m 1050 1254 Phosphorus ppm ASTM D5185m 1180 1302 Zinc ppm ASTM D5185m 2600 3668 Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m >20 18 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/bas	Boron	ppm	ASTM D5185m	2	5		
Manganese ppm ASTM D5185m 0 1 Magnesium ppm ASTM D5185m 950 949 Calcium ppm ASTM D5185m 1050 1254 Phosphorus ppm ASTM D5185m 995 1048 Zinc ppm ASTM D5185m 1180 1302 Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m 3 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3	Barium	ppm	ASTM D5185m	0	<1		
Magnesium ppm ASTM D5185m 950 949 Calcium ppm ASTM D5185m 1050 1254 Phosphorus ppm ASTM D5185m 995 1048 Zinc ppm ASTM D5185m 1180 1302 Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m 3 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.4 Sulfation Abs/.1mm *ASTM D7415 >30 19.	Molybdenum	ppm	ASTM D5185m	50	70		
Calcium ppm ASTM D5185m 1050 1254 Phosphorus ppm ASTM D5185m 995 1048 Zinc ppm ASTM D5185m 1180 1302 Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m >20 18 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.4 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION *ASTM D7414 <	Manganese	ppm	ASTM D5185m	0	1		
Phosphorus ppm ASTM D5185m 995 1048 Zinc ppm ASTM D5185m 1180 1302 Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m 3 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.4 Nitration Abs/cm *ASTM D7624 >20 9.5 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION *ASTM D7414 >25<	Magnesium	ppm	ASTM D5185m	950	949		
Zinc ppm ASTM D5185m 1180 1302 Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m 3 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.4 Nitration Abs/cm *ASTM D7624 >20 9.5 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 <td>Calcium</td> <td>ppm</td> <td>ASTM D5185m</td> <td>1050</td> <td>1254</td> <td></td> <td></td>	Calcium	ppm	ASTM D5185m	1050	1254		
Sulfur ppm ASTM D5185m 2600 3668 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m 3 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.4 Nitration Abs/cm *ASTM D7624 >20 9.5 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 16.1	Phosphorus	ppm	ASTM D5185m	995	1048		
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 8 Sodium ppm ASTM D5185m 3 Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.4 Nitration Abs/cm *ASTM D7624 >20 9.5 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 16.1	Zinc	ppm	ASTM D5185m	1180	1302		
Silicon ppm ASTM D5185m >25 8	Sulfur		ASTM D5185m	2600	3668		
Sodium	CONTAMINAN	ITS	method	limit/base	current	history1	history2
Potassium ppm ASTM D5185m >20 18 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.4 Nitration Abs/cm *ASTM D7624 >20 9.5 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 16.1	Silicon	ppm	ASTM D5185m	>25	8		
INFRA-RED	Sodium	ppm	ASTM D5185m		3		
Soot % % *ASTM D7844 >3 0.4 Nitration Abs/cm *ASTM D7624 >20 9.5 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 16.1	Potassium	ppm	ASTM D5185m	>20	18		
Nitration Abs/cm *ASTM D7624 >20 9.5 Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 16.1	INFRA-RED		method	limit/base	current	history1	history2
Sulfation Abs/.1mm *ASTM D7415 >30 19.9 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 16.1	Soot %	%	*ASTM D7844	>3	0.4		
FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 16.1	Nitration		*ASTM D7624	>20	9.5		
Oxidation	Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9		
	FLUID DEGRA	NOITAC	method	limit/base	current	history1	history2
Base Number (BN) mg KOH/g ASTM D2896 6.7	Oxidation	Abs/.1mm	*ASTM D7414	>25	16.1		
	Base Number (BN)	mg KOH/g	ASTM D2896		6.7		



OIL ANALYSIS REPORT

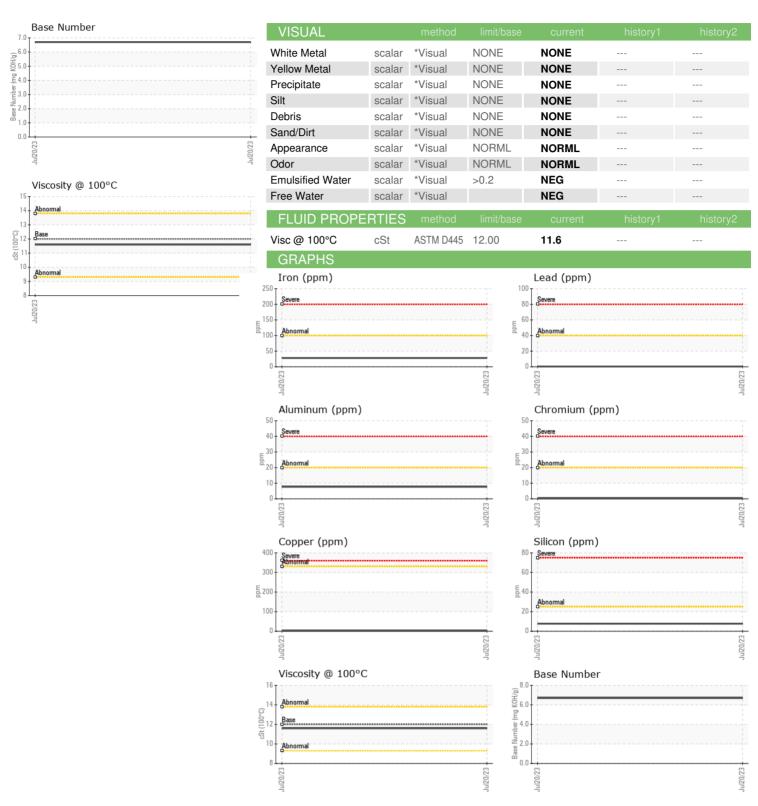





Laboratory Sample No.

Lab Number **Unique Number**

: 10602973

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0100884 : 05923026

Received Diagnosed Test Package : MOB 1 (Additional Tests: TBN)

: 14 Aug 2023 : 14 Aug 2023

Diagnostician : Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MILLER TRUCK LEASING #114

63 REPAUPO STATION ROAD LOGAN TOWNSHIP, NJ US 08085

Contact: ED DAVIS edavis@millertransgroup.com

T: (856)214-3521

F: (856)214-3663 Contact/Location: ED DAVIS - MILLOG