


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

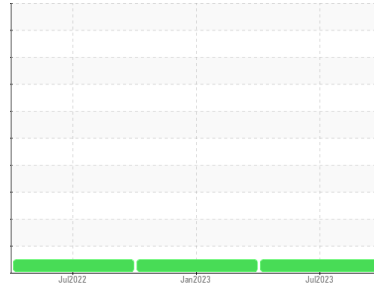

Machine Id  
**DT795**  
 Component  
**Transmission (Auto)**  
 Fluid  
**SHELL SPIRAX S6 ATF (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0096949</b>	PCA0080887	PCA0074835
Sample Date	Client Info			<b>22 Jul 2023</b>	18 Jan 2023	15 Jul 2022
Machine Age	mls	Client Info		<b>108058</b>	82258	55695
Oil Age	mls	Client Info		<b>0</b>	82258	0
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>300	<b>39</b>	87	67
Chromium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>70	<b>23</b>	48	38
Lead	ppm	ASTM D5185m	>85	<b>20</b>	51	38
Copper	ppm	ASTM D5185m	>90	<b>23</b>	15	13
Tin	ppm	ASTM D5185m	>10	<b>3</b>	7	6
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>76</b>	95	126
Barium	ppm	ASTM D5185m		<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m		<b>6</b>	2	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>45</b>	<1	5
Calcium	ppm	ASTM D5185m		<b>159</b>	56	82
Phosphorus	ppm	ASTM D5185m		<b>282</b>	247	289
Zinc	ppm	ASTM D5185m		<b>77</b>	3	12
Sulfur	ppm	ASTM D5185m		<b>1973</b>	994	1595

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	7	6
Sodium	ppm	ASTM D5185m		<b>2</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	4	4

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG




FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	36	<b>34.8</b>	34.8	35.0

# OIL ANALYSIS REPORT

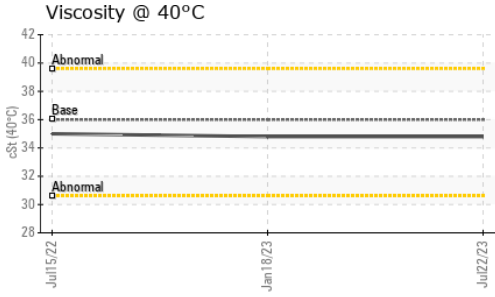

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

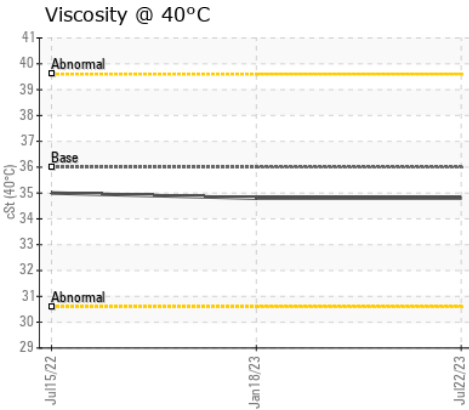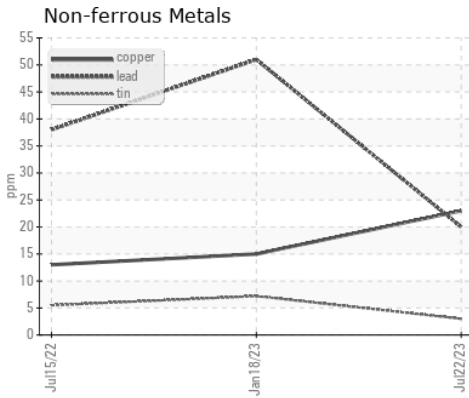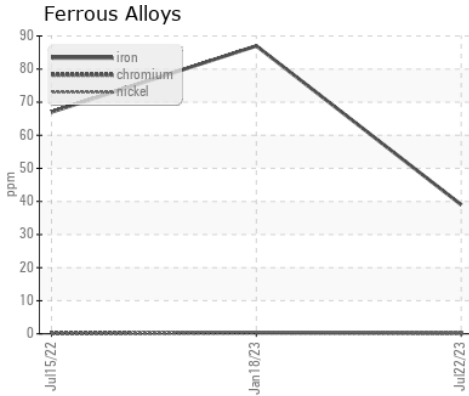

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096949 **Received** : 14 Aug 2023  
**Lab Number** : **05923841** **Diagnosed** : 15 Aug 2023  
**Unique Number** : 10603788 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**NW WHITE & CO - ANDERSON DIVISION**  
 2605 RIVER RD  
 PIEDMONT, SC  
 US 29673  
 Contact: James Threatt  
 jthreatt@nwwhite.com  
 T: (864)918-4646  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)