


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

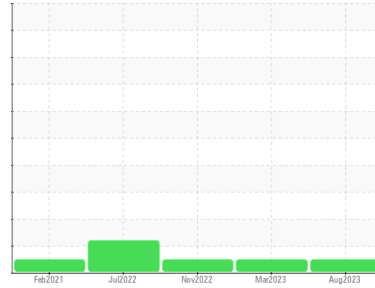

Machine Id  
**T282**  
Component  
**Transmission (Auto)**  
Fluid  
**NOT GIVEN (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0102183</b>	PCA0092499	PCA0084942
Sample Date	Client Info		<b>08 Aug 2023</b>	20 Mar 2023	17 Nov 2022
Machine Age	mls	Client Info	<b>108520</b>	124071	0
Oil Age	mls	Client Info	<b>124071</b>	124071	0
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>46</b>	24	22
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>24</b>	15	18
Lead	ppm	ASTM D5185m >50	<b>9</b>	8	17
Copper	ppm	ASTM D5185m >225	<b>70</b>	35	23
Tin	ppm	ASTM D5185m >10	<b>3</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>74</b>	82	94
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>1</b>	4	0
Calcium	ppm	ASTM D5185m	<b>112</b>	126	97
Phosphorus	ppm	ASTM D5185m	<b>223</b>	215	237
Zinc	ppm	ASTM D5185m	<b>32</b>	19	28
Sulfur	ppm	ASTM D5185m	<b>1493</b>	1374	1537

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	4	4
Sodium	ppm	ASTM D5185m	<b>4</b>	4	6
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0


### VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

### FLUID PROPERTIES




	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>32.5</b>	32.3	34.0

# OIL ANALYSIS REPORT

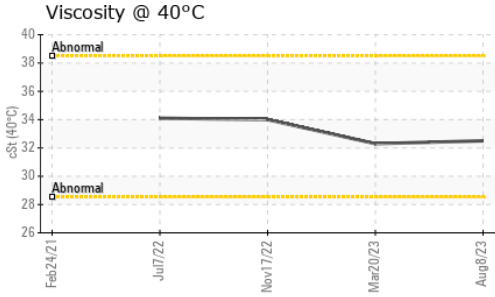

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

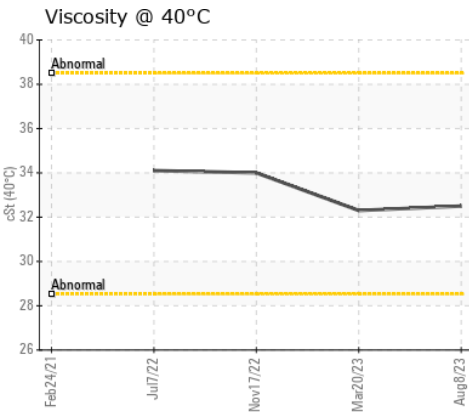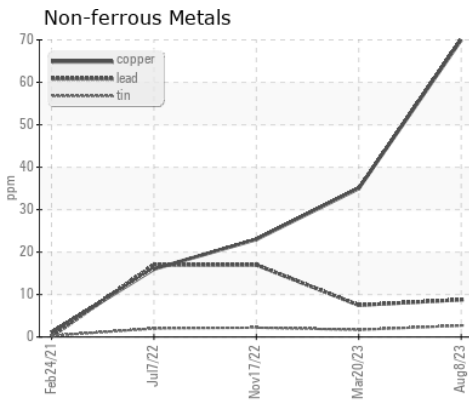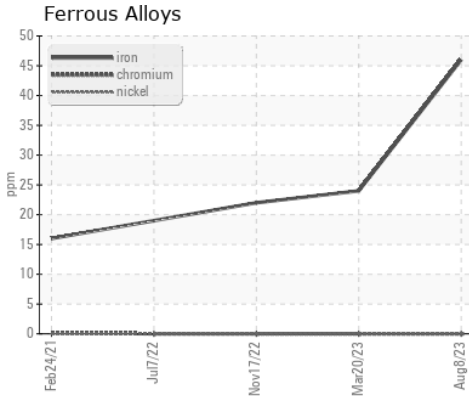

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0102183  
**Lab Number** : 05923842  
**Unique Number** : 10603789  
**Test Package** : FLEET

**Received** : 14 Aug 2023  
**Diagnosed** : 15 Aug 2023  
**Diagnostician** : Don Baldridge

**NW WHITE & CO - COLUMBIA DIVISION**  
 100 INDEPENDENCE BLVD  
 COLUMBIA, SC  
 US 29210  
 Contact: GEORGE EDWARDS  
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: