




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**426089-402414**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

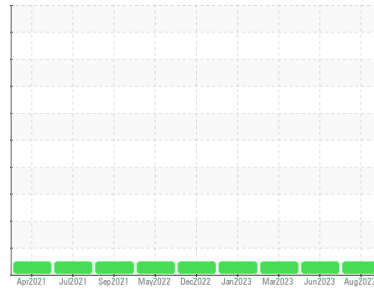

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Test for glycol is negative. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0071928</b>  | GFL0081564  | GFL0071919  |
| Sample Date   | Client Info |             | <b>11 Aug 2023</b> | 20 Jun 2023 | 14 Mar 2023 |
| Machine Age   | hrs         | Client Info | <b>18645</b>       | 18258       | 17520       |
| Oil Age       | hrs         | Client Info | <b>600</b>         | 600         | 600         |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Oil Added   | Oil Added   |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|      | method    | limit/base | current        | history1 | history2 |
|------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >120 | <b>8</b>     | 21       | 11       |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m >5   | <b>0</b>     | 0        | <1       |
| Titanium | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | <1       | 0        |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >20  | <b>4</b>     | 3        | 2        |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | 0        | 1        |
| Copper   | ppm    | ASTM D5185m >330 | <b>3</b>     | <1       | 1        |
| Tin      | ppm    | ASTM D5185m >15  | <b>0</b>     | 0        | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>1</b>     | 2        | 1        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 2        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>68</b>    | 61       | 69       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>977</b>   | 868      | 883      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1231</b>  | 1117     | 1143     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1080</b>  | 920      | 958      |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1382</b>  | 1237     | 1211     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>4061</b>  | 3455     | 2702     |

## CONTAMINANTS

|           | method | limit/base      | current    | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>2</b>   | 7        | 2        |
| Sodium    | ppm    | ASTM D5185m     | <b>15</b>  | 29       | 61       |
| Potassium | ppm    | ASTM D5185m >20 | <b>40</b>  | 34       | 48       |
| Glycol    | %      | *ASTM D2982     | <b>NEG</b> | NEG      | 0.0      |

## INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >4  | <b>0.5</b>  | 0.6      | 0.3      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>6.9</b>  | 10.0     | 10.1     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.7</b> | 22.8     | 21.9     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.2</b> | 18.3     | 18.8     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>8.3</b>  | 6.1      | 5.9      |







# OIL ANALYSIS REPORT

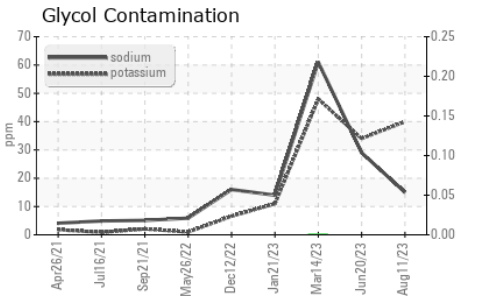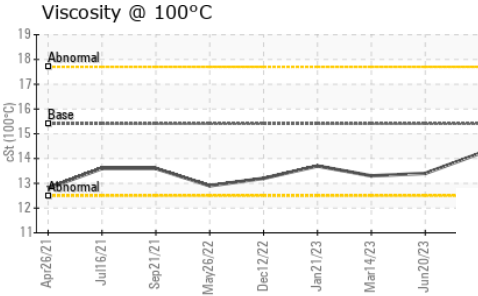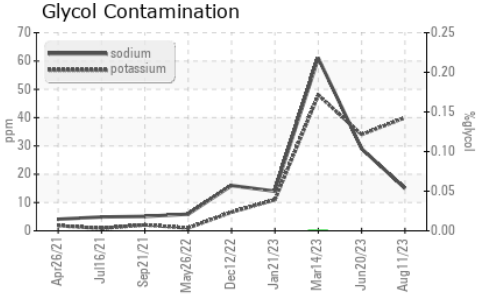

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>14.2</b> | 13.4     | 13.3 |

## GRAPHS

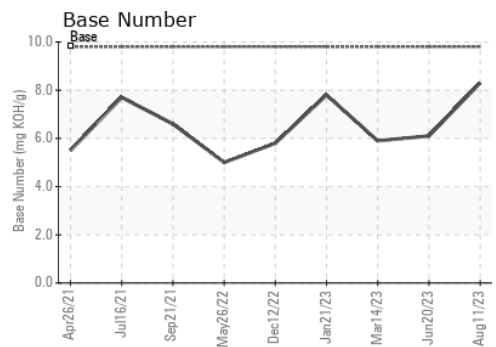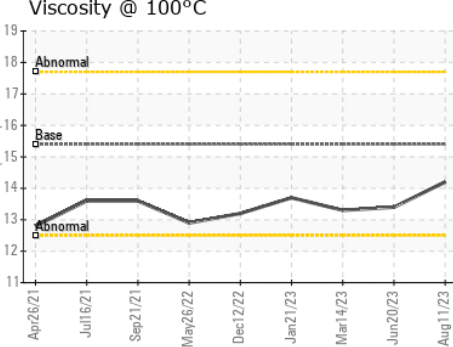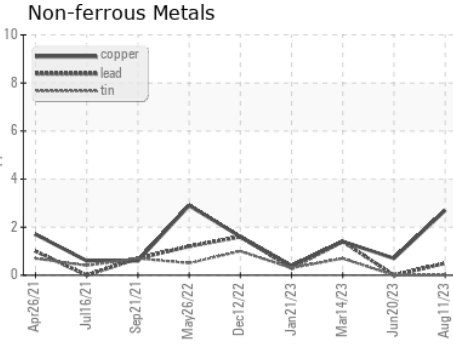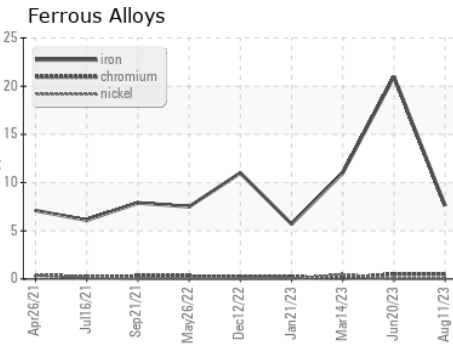

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0071928 **Received** : 14 Aug 2023  
**Lab Number** : 05924010 **Diagnosed** : 15 Aug 2023  
**Unique Number** : 10603957 **Diagnostician** : Doug Bogart  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 885 - Orlando**  
 1263 W Landstreet Rd  
 Orlando, FL  
 US 32824  
 Contact: DAWN WALLACE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: