

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



VOLVO VNL 760 219

Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- GA

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

								4
_								
C	GAL)				Aug2023			
	SAMPLE INFORI	MATION	method	limit/base	current	ŀ	nistory1	h
	Sample Number		Client Info		PCA0102642			
	Sample Date		Client Info		10 Aug 2023			
	Machine Age	mls	Client Info		91385			
	Oil Age	mls	Client Info		43662			
	Oil Changed		Client Info		Changed			

Sample Date		Client Info		10 Aug 2023		
Machine Age	mls	Client Info		91385		
Oil Age	mls	Client Info		43662		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>6.0	<1.0		
Glycol		WC Method	20.0	NEG		
				MEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	52		
Chromium	ppm	ASTM D5185m	>20	1		
Nickel	ppm	ASTM D5185m	>2	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	1		
Aluminum	ppm	ASTM D5185m	>25	11		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	26		
Tin	ppm	ASTM D5185m	>15	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
						· · · · · ·
Boron	ppm	ASTM D5185m	2	6		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	0	6		
Barium	ppm	ASTM D5185m	0	0		
Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m	0 50	0 65		
Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0	0 65 2		
Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950	0 65 2 850		
Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950 1050	0 65 2 850 1275		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950 1050 995	0 65 2 850 1275 958		
Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950 1050	0 65 2 850 1275 958 1215		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950 1050 995 1180 2600	0 65 2 850 1275 958 1215 3006		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950 1050 995 1180 2600	0 65 2 850 1275 958 1215 3006		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	0 50 0 950 1050 995 1180 2600	0 65 2 850 1275 958 1215 3006 current		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	0 50 0 950 1050 995 1180 2600 limit/base >25	0 65 2 850 1275 958 1215 3006 current 9	 history1	 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	0 50 0 950 1050 995 1180 2600	0 65 2 850 1275 958 1215 3006 current	 history1	 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	0 50 0 950 1050 995 1180 2600 limit/base >25	0 65 2 850 1275 958 1215 3006 current 9	history1	history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	0 50 0 950 1050 995 1180 2600 limit/base >25 >20	0 65 2 850 1275 958 1215 3006 current 9 3	 history1	history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950 1050 995 1180 2600 limit/base >25 >20	0 65 2 850 1275 958 1215 3006 current 9 3	history1 history1	history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3	0 65 2 850 1275 958 1215 3006 current 9 3 31	history1 history1	history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D76145	0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3 >20 >30	0 65 2 850 1275 958 1215 3006 current 9 3 31 current 0.6 13.4 26.5	history1 history1	history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRAE	ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844	0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3 >20 >30 limit/base	0 65 2 850 1275 958 1215 3006 current 9 3 31 current 0.6 13.4 26.5	history1 history1 history1	history2 history2 history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D76145	0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3 >20 >30	0 65 2 850 1275 958 1215 3006 current 9 3 31 current 0.6 13.4 26.5	history1 history1	history2 history2



OIL ANALYSIS REPORT

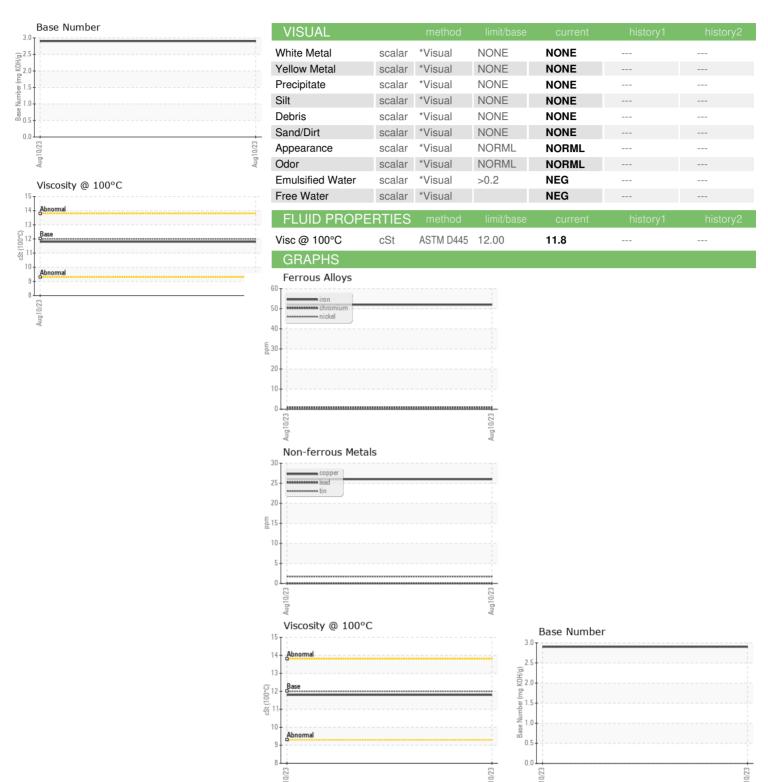





Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: PCA0102642 : 05924117 : 10604064 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 14 Aug 2023 Diagnosed Diagnostician

: 15 Aug 2023 : Don Baldridge

A Truck Repair 9349 China Grove Church Road Pineville, NC US 28134

Contact: Vlad Melnichuk shop@migway.com T: (980)255-3200

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)