


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

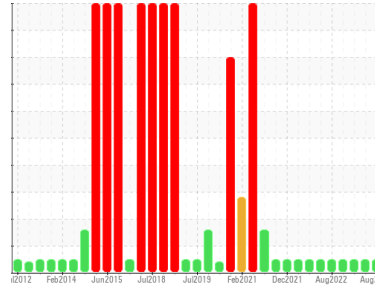

Area
KEMP QUARRIES / RIVER VALLEY BACKBONE
 Machine Id
WL079
 Component
Rear Differential
 Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Hour meter 47885)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0085857	PCA0085835	PCA0037118
Sample Date	Client Info		09 Aug 2023	06 Apr 2023	19 Jan 2023
Machine Age	hrs	Client Info	47885	47308	46970
Oil Age	hrs	Client Info	900	338	1200
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	157	84	120
Chromium	ppm	ASTM D5185m >3	<1	0	<1
Nickel	ppm	ASTM D5185m >3	<1	0	0
Titanium	ppm	ASTM D5185m >2	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >30	7	<1	6
Lead	ppm	ASTM D5185m >13	3	<1	4
Copper	ppm	ASTM D5185m >103	36	15	26
Tin	ppm	ASTM D5185m >5	2	<1	2
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	0	<1
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	2	2	1
Manganese	ppm	ASTM D5185m	1	<1	1
Magnesium	ppm	ASTM D5185m	23	33	21
Calcium	ppm	ASTM D5185m	3046	3131	2924
Phosphorus	ppm	ASTM D5185m	964	979	817
Zinc	ppm	ASTM D5185m	1159	1259	1073
Sulfur	ppm	ASTM D5185m	6593	7836	9232

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	30	20	30
Sodium	ppm	ASTM D5185m	0	<1	<1
Potassium	ppm	ASTM D5185m >20	2	0	<1


VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	MODER	MODER	LIGHT
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES









	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 195	177	181	178

OIL ANALYSIS REPORT

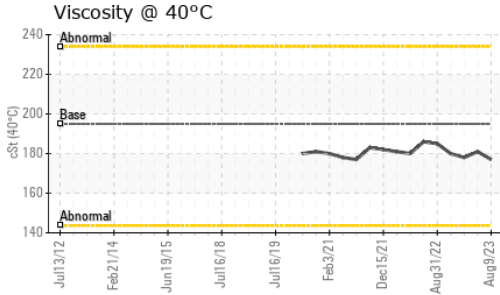

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

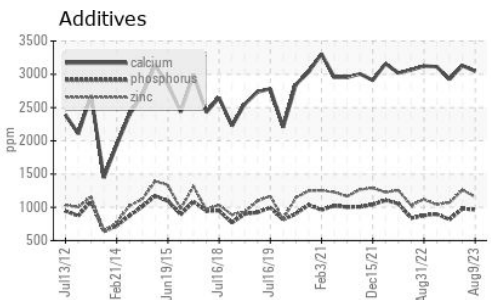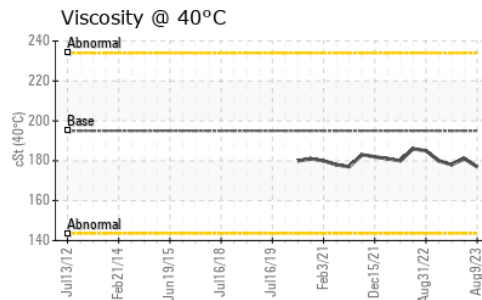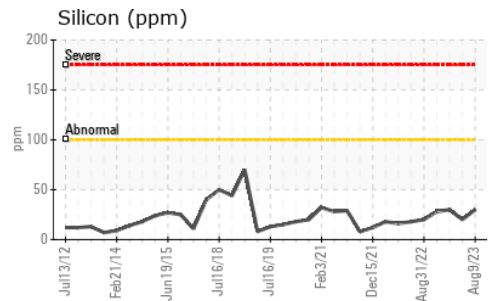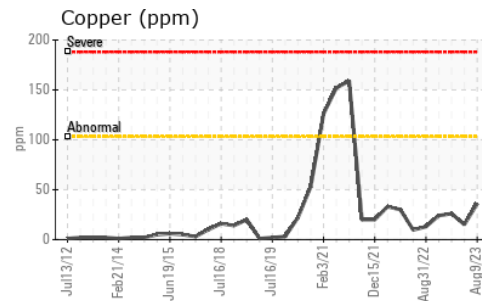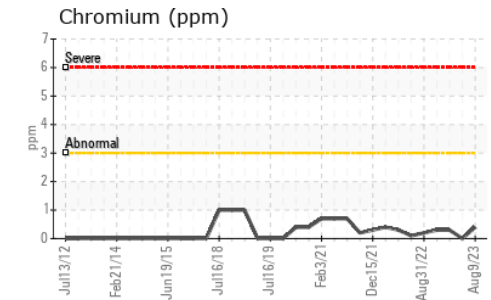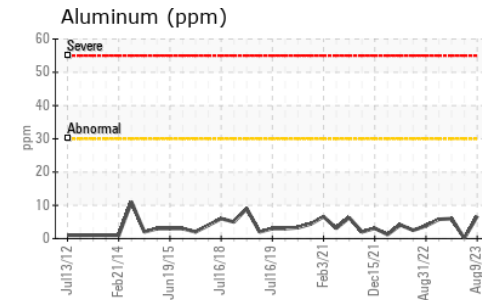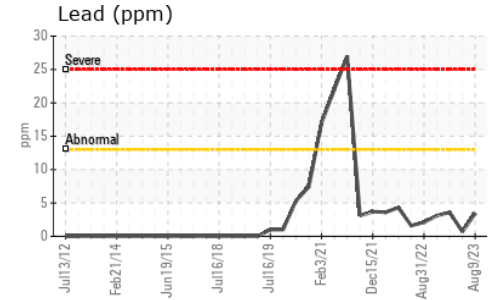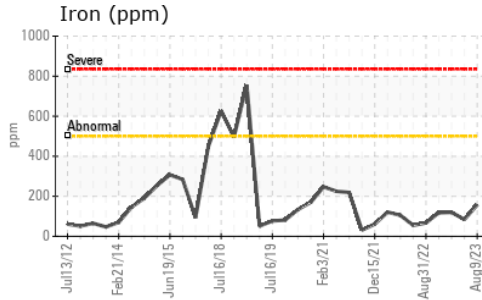

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0085857
Lab Number : 05924549
Unique Number : 10604496
Test Package : MOB 1

Kemp Quarries - River Valley - Backbone
 5600 S Hwy 253
 Huntington, AR
 US 72940

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

backbone@rivervalleyquarries.com

T:
F: